


name部位名称	unit 符号	specification 尺寸规格
No. of cinducors导体数	pin	(N)P
margin width边距	M	0.5±0.08
Pintch间距	P	0.5±0.08
Total pitch总间距	SP	(N-1)×0.05±0.08
width总宽度	W	(N-1)×0.5±0.08
strip length 1端子长度1	S1	3±0.5
strip length 2端子长度2	S2	3±0.5
reinforeing tape length 1 补强板长度1	B1	4±2.0
reinforeing tape length 2 补强板长度2	B2	4±2.0
Total length产品长度	TL	(L)±2MM
Insulation length绝缘体长度	IL	(L-S1-S2)±2
Thickness insulation产品厚度	T	0.121±0.03
Cable thickness末端厚度	T1/T2	0.303±0.03
slanting切割斜度	A	< 0.3

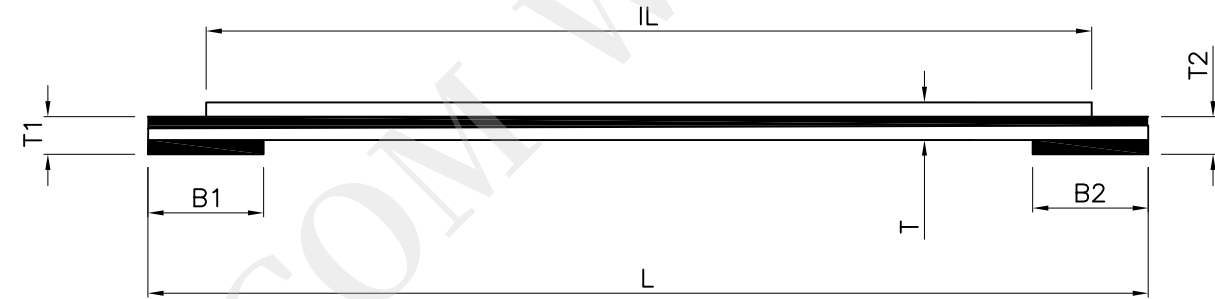

型号: FC-0.5B-XXP-XXXMM


0.5: 0.5mm Pitch 间距

B: oppositedirectionge表示同向

NP: PIN位数

XXX: 总长度

MM: 单位



						APPROVALS		DATE	DEALON 德之隆® ELECTRONICS CO.,LTD		
						DRAWN	G.M.Chen	2015/5/22			
						CHECKED			TITLE: DC JACK		
						APPROVALS			PART NO. FC-0.5B-XXP-XXXMM		
	A		NEW			TOLERANCES ARE		30~以上 ±0.30	ANGLE	UNIT: mm	
								10~30 ±0.20			
								5~10 ±0.15			
								~ 5 ±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.			±2'	DRAWING NO.	SHEET 1 OF 1
										SCALE: 1:1	PROJ: ①