


General Tolerances: $\pm 0.05\text{mm}$

6		7		8	
REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD






 THIRD ANGLE PROJECTION		GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 08/DEC/16	PART NO. FFC03009-XXSBD113W5M	ITEM NO. FFC03009	 Leader Of Industry	
		X±.012(0.30)	X'±.5"	CHECKED BY	DATE	TITLE			
DESIGN UNITS Inch (metric)		X.X±.008(0.20)	X'±2"	CHERRY	08/DEC/16	FPC/FFC connector 0.3mm Double contact SMT		REV 0	SHEET NO. 2/3
SCALE 5:1	SIZE A4	X.XX±.006(0.15)	XX'±1"	DRAWN BY	DATE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		X.XXX±.004(0.10)	XXX'±0.5"	KATE	08/DEC/16				

1 2 3 4 5 6 7 8

REV	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

Note:

1. 10 sprocket hole cumulative tolerance ± 0.2
2. Carrier camber is within 1.0mm in 250mm
3. Material: White Conductive polystyrene Alloy 100% recyclable
4. All dimensions meet EIA-481-3 requirements
5. Peel off force of cover tape&carrier tape: 20g~130g(0.2N~1.3N)
6. Component load per 13" reel: 5,000 pcs

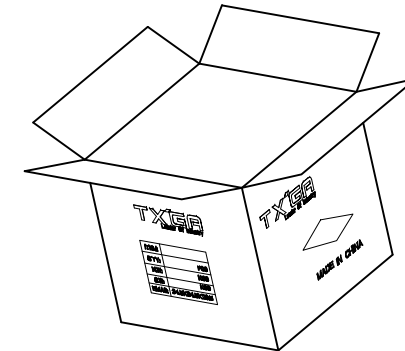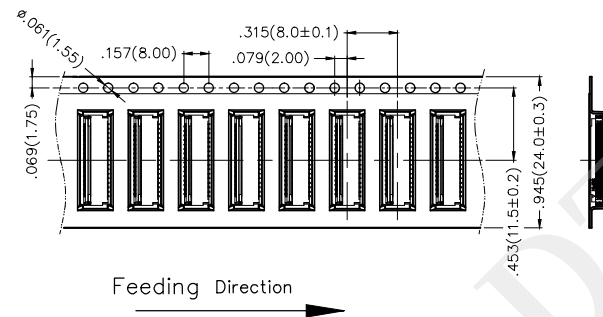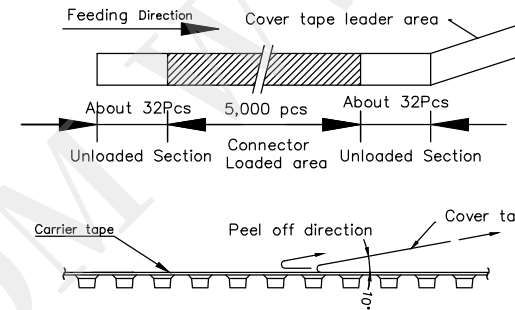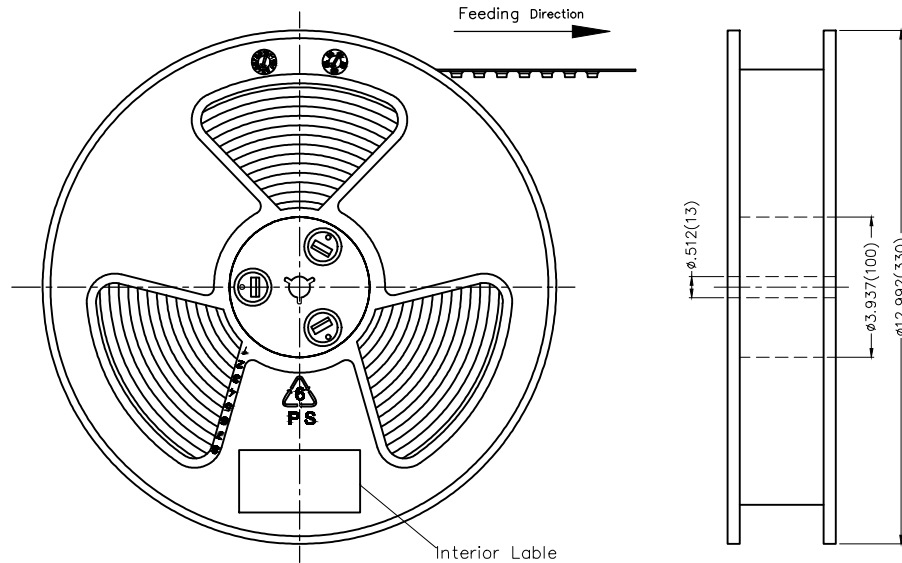

 THIRD ANGLE PROJECTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		APPROVE BY FRANK	DATE 08/DEC/16	PART NO. FFC03009-XXSBD113W5M	ITEM NO. FFC03009	 Leader Of Industry		
	X.±.012(0.30)	X'±5'	CHECKED BY	DATE	TITLE FPC/FFC connector 0.3mm Double contact SMT				
	X.X±.008(0.20)	X'±2'	CHERRY	08/DEC/16					
	X.XX±.006(0.15)	.XX'±1'	DRAWN BY	DATE					
DESIGN UNITS Inch (metric)	X.XXX±.004(0.10)	.XXX'±0.5'	KATE	08/DEC/16	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO TXGA INDUSTRIAL ELECTRONICS(S.Z)CO.,LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			REV 0	SHEET NO. 3/3
SCALE 5:1	SHEET NO. 3/3								

1 2 3 4 5 6 7 8