
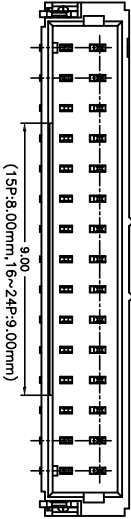


A					
ECN NO.	REV.	DATE.	DESCRIPTION.		
				CHANGE.	CHECK.
					APPRO.

APPROVALS		DATE	TITLE:		
DRAWN	ZHIWEI.CHEN	2015.07.07	1.00mm Crimp Style Connector		
CHECKED					
APPROVALS			PART NO.	GP01-1001WRS-NP	
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm
				±2°	SCALE: 1:1
					DRAWING NO.
					SHEET 1 OF 1

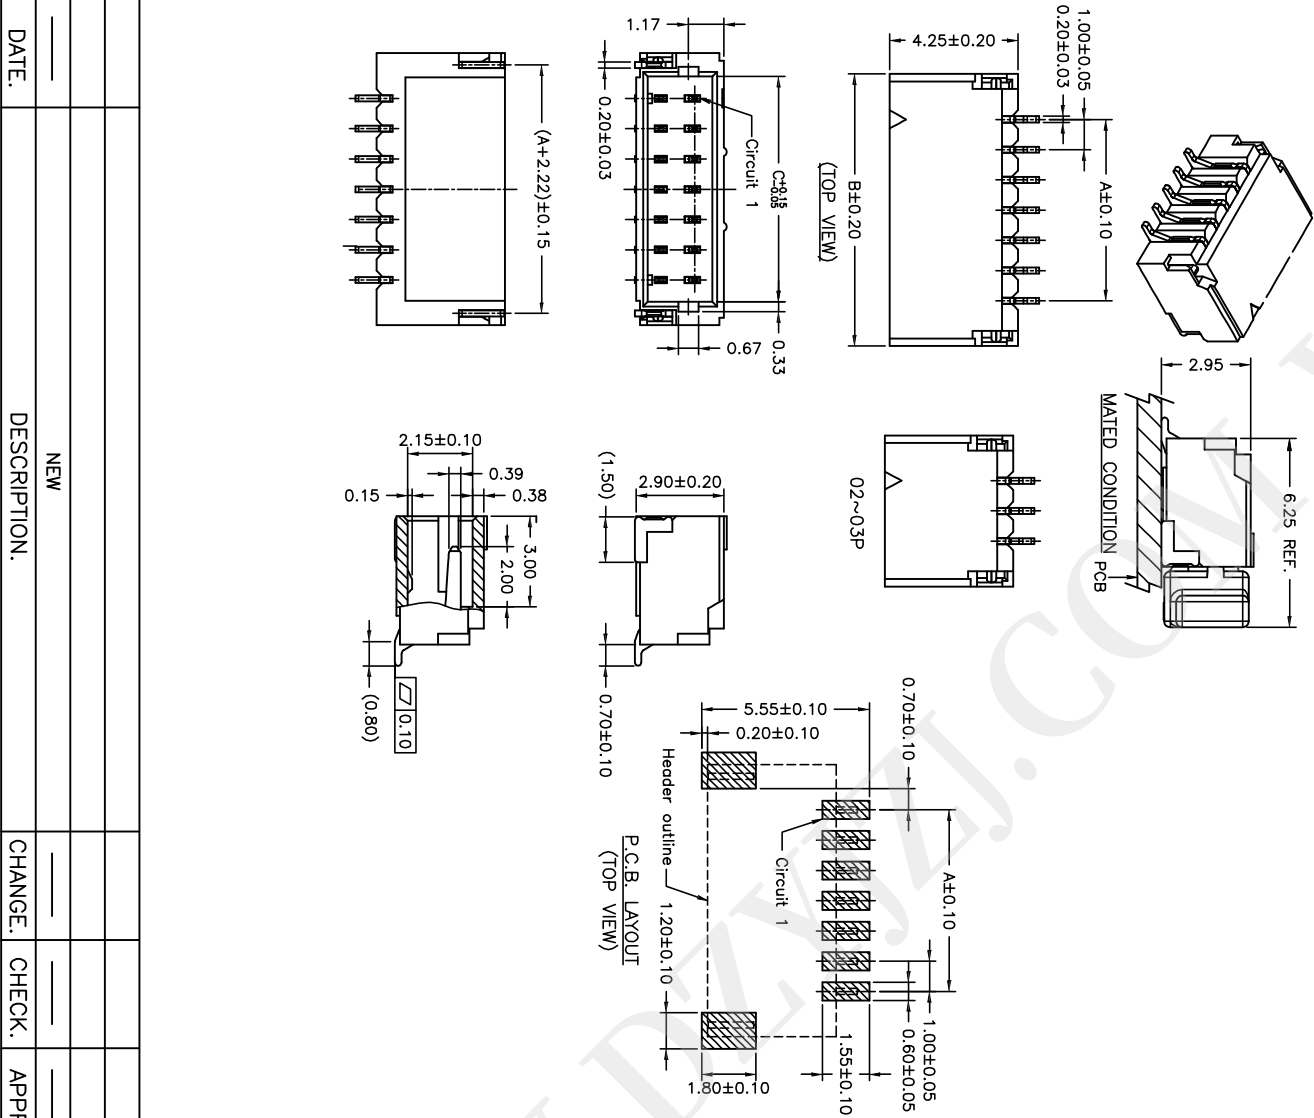

SPECIFICATIONS
Current Rating: 1A AC/DC
Voltage Rating: 50V AC/DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $100\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Matte Tin-plated or Gold-flash
Solder Tabs: Brass/Matte Tin-plated or Gold-flash
Material: Nylon 6T, UL94V-0
Color: Natural(Black)

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.00	4.00	2.45	12P	11.00	14.00	12.45
03P	2.00	5.00	3.45	13P	12.00	15.00	13.45
04P	3.00	6.00	4.45	14P	13.00	16.00	14.45
05P	4.00	7.00	5.45	15P	14.00	17.00	15.45
06P	5.00	8.00	6.45	16P	15.00	18.00	16.45
07P	6.00	9.00	7.45	17P	16.00	19.00	17.45
08P	7.00	10.00	8.45	18P	17.00	20.00	18.45
09P	8.00	11.00	9.45	19P	18.00	21.00	19.45
10P	9.00	12.00	10.45	20P	19.00	22.00	20.45
11P	10.00	13.00	11.45	24P	23.00	26.00	24.45