




SPECIFICATIONS

Current Rating: 1A AC/DC
Voltage Rating: 50V AC/DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Phosphor Bronze/Matte Tin-plated or Gold-flash
Solder Tabs: Brass/Matte Tin-plated or Gold-flash
Wafers: Nylon 6T,UL94V-0,Natural(Black)
Cap: Nylon 6T,UL94V-0,Natural(Black)

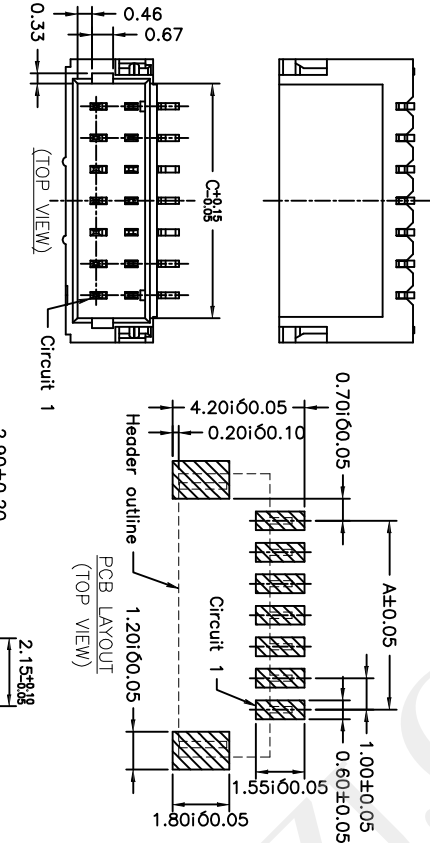

Circuit No.	Dimensions			Circuit No.	Dimensions		
	A	B	C		A	B	C
02P	1.00	4.00	2.45	12P	11.00	14.00	12.45
03P	2.00	5.00	3.45	13P	12.00	15.00	13.45
04P	3.00	6.00	4.45	14P	13.00	16.00	14.45
05P	4.00	7.00	5.45	15P	14.00	17.00	15.45
06P	5.00	8.00	6.45	16P	15.00	18.00	16.45
07P	6.00	9.00	7.45	17P	16.00	19.00	17.45
08P	7.00	10.00	8.45	18P	17.00	20.00	18.45
09P	8.00	11.00	9.45	19P	18.00	21.00	19.45
10P	9.00	12.00	10.45	20P	19.00	22.00	20.45
11P	10.00	13.00	11.45	24P	23.00	26.00	24.45

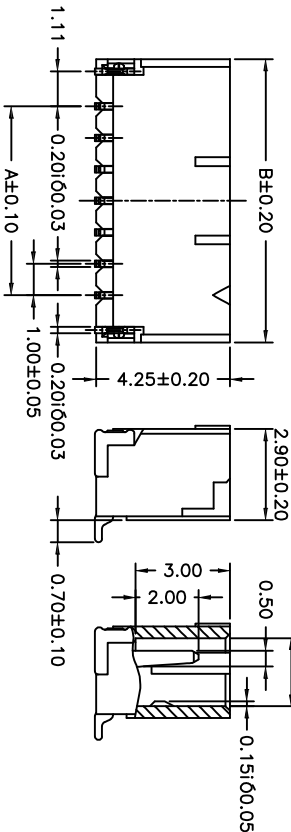

APPROVALS		DATE		GEPU 歌普	
DRAWN	ZHIWEI.CHEN	2015.07.07			
CHECKED		TITLE:		1.00mm Crimp Style Connector	
APPROVALS		PART NO.		GP01-100IWS-NP	
TOLERANCES ARE		ANGLE		UNIT: mm	
30~0.10		±0.30		SCALE: 1:1	
10~30		±0.20		PROJ.	
5~10		±0.15		SHEET 1 OF 1	
~5		±0.10			
±2°		DRAWING NO.			
APPRO.					
CHANGE.					
CHECK.					
NEW					
DESCRIPTION.					
REV.		DATE.			
A					
ECN NO.					