


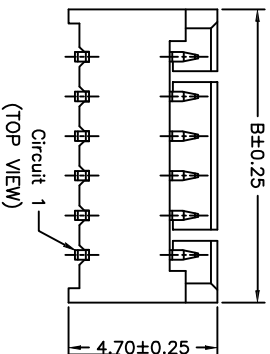

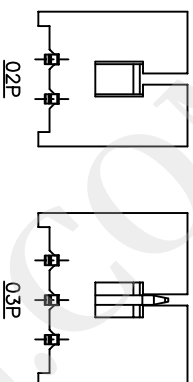


SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $100\text{M}\Omega$ Min.
Withstanding Voltage: $500\text{V AC}/\text{minute}$
Pin Mat'l: Phosphor Bronze/Tin-plated

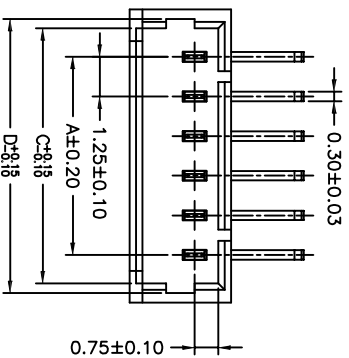

Circuit	Dimensions				
	A	B	C	D	E
No.					
02P	----	4.25	3.05	3.65	----
03P	2.50	5.50	4.30	4.90	----
04P	3.75	6.75	5.55	6.15	2.50
05P	5.00	8.00	6.80	7.40	3.75
06P	6.25	9.25	8.05	8.65	5.00
07P	7.50	10.50	9.30	9.90	6.25
08P	8.75	11.75	10.55	11.15	7.50
09P	10.00	13.00	11.80	12.40	8.75
10P	11.25	14.25	13.05	13.65	10.00
11P	12.50	15.50	14.30	14.90	11.25
12P	13.75	16.75	15.55	16.15	12.50
13P	15.00	18.00	16.80	17.40	13.75
14P	16.25	19.25	18.05	18.65	15.00
15P	17.50	20.50	19.30	19.90	16.25
16P	18.75	21.75	20.55	21.15	17.50
17P	20.00	23.00	21.80	22.40	18.75
18P	21.25	24.25	23.05	23.65	20.00

APPROVALS		DATE	GEPU 歌普			
DRAWN	ZHIWEI.CHEN	2015.07.07	TITLE: 1.25mm Crimp Style Connector			
CHECKED						
APPROVALS			PART NO. GP01-1250WR-NP			
TOLERANCES ARE		30~45° ±0.30 10~30° ±0.15 5~10° ±0.10 ~ 5° ±0.10	ANGLE	UNIT: mm	SCALE: 1:1	PROJ. 
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	SHEET 1 OF 1