
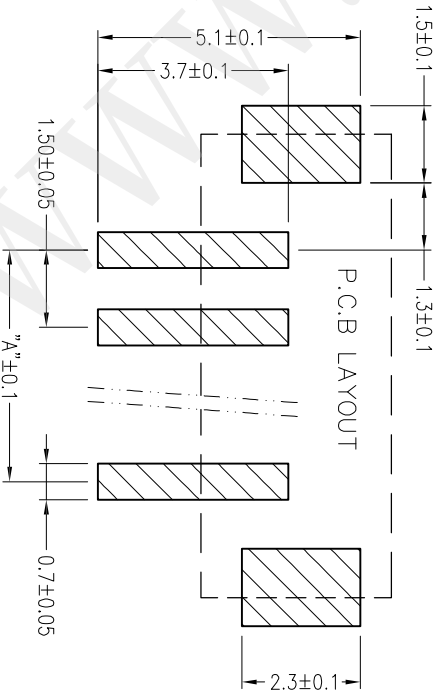
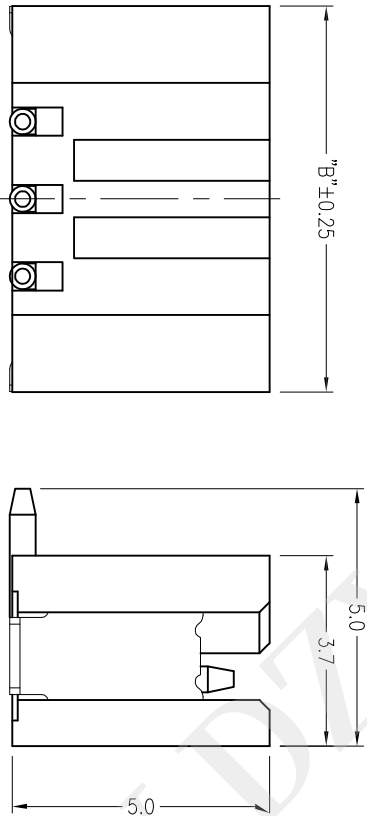


Poles	DIM. A	DIM. B
2	1.5	6.0
3	3.0	7.5
4	4.5	9.0
5	6.0	10.5
6	7.5	12.0
7	9.0	13.5
8	10.5	15.0
9	12.0	16.5
10	13.5	18.0
11	15.0	19.5
12	16.5	21.0
13	18.0	22.5
14	19.5	24.0
15	21.0	25.5
16	22.5	27.0

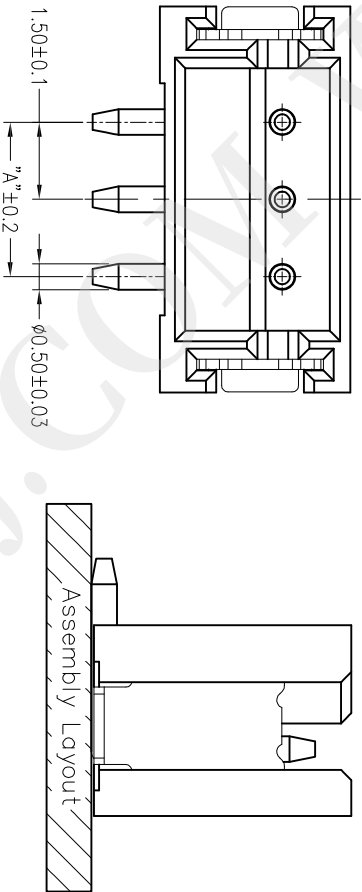

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#32~#26
 - ◆ Applicable Wire: AWG#32~#26
 - ◆ 额定电压: 50V DC,AC(rms)
 - ◆ Rated voltage: 50V DC,AC(rms)
 - ◆ 额定电流: 1A (AWG #26)
 - ◆ Rated Current: 1A (AWG #26)
 - ◆ 耐压值: 500V AC/minute
 - ◆ Withstand voltage: 500V AC/min.
 - ◆ 工作温度: -25℃ ~ +85℃
 - ◆ Working Temp : -25℃ ~ +85℃
 - ◆ 绝缘电阻: ≥500 MΩ
 - ◆ Insulation resistance: ≥500 MΩ
 - ◆ 接触电阻: ≤20 mΩ
 - ◆ Contact resistance: ≤20 mΩ
- 材料 MATERIAL
- ◆ 绝缘体: 尼龙9T, UL94-V0
 - ◆ Insulator: Nylon9T, UL94-V0
 - ◆ 接触针: 黄铜
 - ◆ Contact PIN: Brass
 - ◆ 焊片: 磷铜
 - ◆ Solder tab: Phosphor bronze

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO.	GP01-1500WV-S-NP
CHECKED			SCALE:	1:1
APPROVALS			PROJ.	
TOLERANCES ARE		30~Ø0.1 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE ±2°
DRAWING NO.			SHEET 1 OF 1	
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	
			CHANGE.	
			CHECK.	
			APPRO.	