
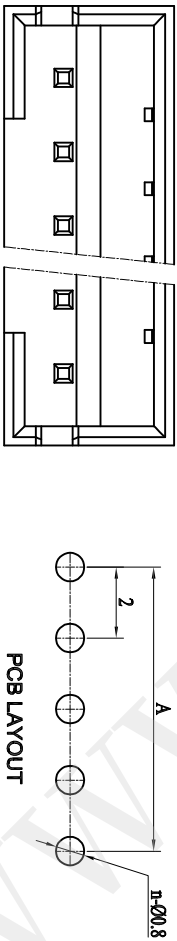


POLES	PART NO	DIMENSIONS(mm)	
		A	B
2	2	2.0	6.1
3	3	4.0	8.1
4	4	6.0	10.1
5	5	8.0	12.1
6	6	10.0	14.1
7	7	12.0	16.1
8	8	14.0	18.1
9	9	16.0	20.1
10	10	18.0	22.1
11	11	20.0	24.1
12	12	22.0	26.1
13	13	24.0	28.1
14	14	26.0	30.1
15	15	28.0	32.1
16	16	30.0	34.1

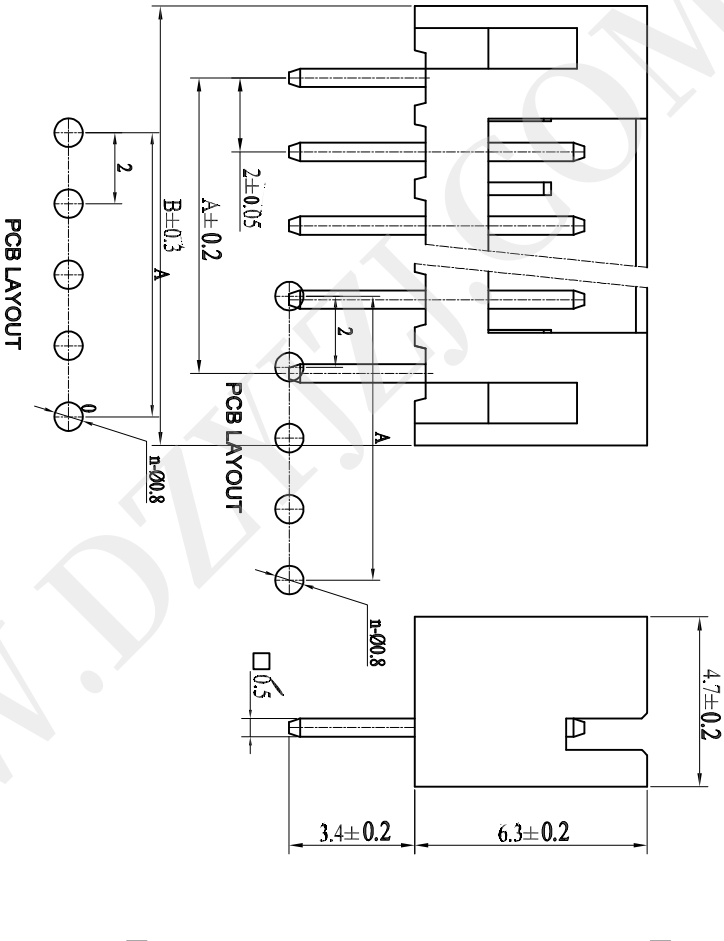

- 技术参数 (SPECIFICATIONS)
- ◆ 额定电压: 250V AC DC
 - ◆ Voltage rating: 250V AC DC
 - ◆ 额定电流: 2.0A AC DC MIN
 - ◆ Current rating: 2.0A AC DC MIN
 - ◆ 耐压值: 800V AC/minute
 - ◆ Withstand voltage 800V AC/minute
 - ◆ 绝缘电阻: 1000M Ω MIN
 - ◆ Insulation resistance: 1000M Ω MIN
 - ◆ 接触电阻: 20m Ω MAX
 - ◆ Contact resistance: 20m Ω MAX
 - ◆ 工作温度: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C
 - ◆ Working Temperature: -25 $^{\circ}$ C ~ +85 $^{\circ}$ C
 - ◆ 间距: 2.0 mm
 - ◆ Pitch: 2.0 mm
- 材料 (MATERIAL)
- ◆ 外壳: 尼龙66
 - ◆ Housing: PA66
 - ◆ 插针: 黄铜
 - ◆ Pin: Brass

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			PART NO.	GP01-2001WV-NP
APPROVALS			UNIT: mm	SCALE: 1:1
TOLERANCES ARE		ANGLE	DRAWING NO.	SHEET 1 OF 1
30 $^{\circ}$ ~0.1		± 0.30		
10 $^{\circ}$ ~30		± 0.20		
5 $^{\circ}$ ~10		± 0.15		
~ 5		± 0.10		
		$\pm 2^{\circ}$		
GEPU 歌普				
NEW				
DESCRIPTION.				
ECN NO.	REV.	DATE.		