
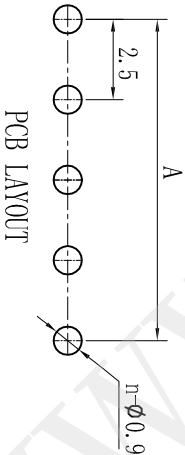

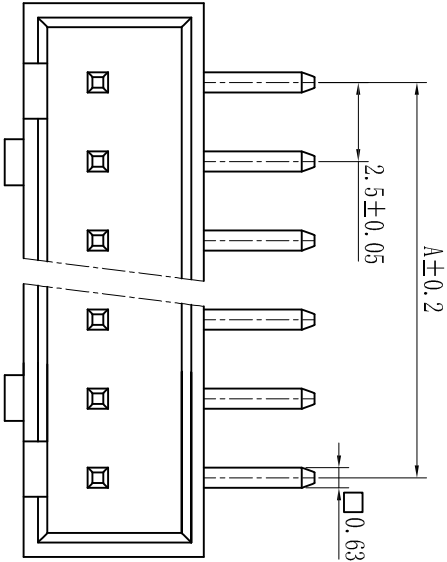
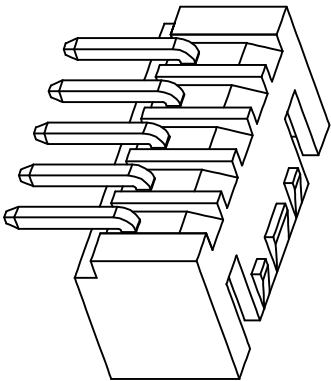


PARTNO	A	B
2P	2.5	7.5
3P	5.0	10.0
4P	7.5	12.5
5P	10.0	15.0
6P	12.5	17.5
7P	15.0	20.0
8P	17.5	22.5
9P	20.0	25.0
10P	22.5	27.5
11P	25.0	30.0
12P	27.5	32.5
13P	30.0	35.0
14P	32.5	37.5
15P	35.0	40.0

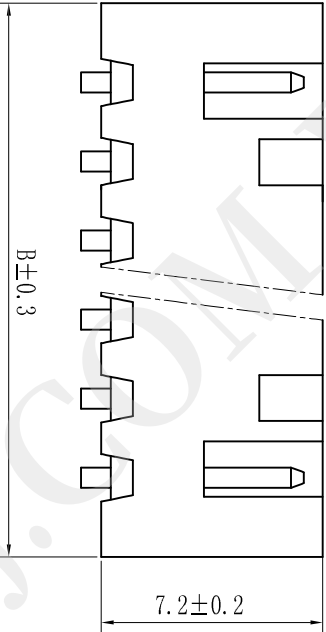

技术参数 (SPECIFICATIONS)

额定电压: 250V AC DC

Voltage rating:250V AC DC

额定电流: 3.0A AC DC #22

Current rating:3.0A AC DC #22

耐压值: 1000V AC/minute

Withstand voltage:1000V AC/minute

绝缘电阻: 1000MΩ MIN

Insulation resistance:1000MΩ MIN

接触电阻: 0.02Ω MAX

Contact resistance:0.02Ω MAX

工作温度: -25℃~+85℃

Working Temperature:-25℃~+85℃

间距: 2.5mm

Pitch:2.5mm

材料 (MATERIAL)

外壳: 尼龙66

Housing:PA66

插针: 黄铜

Pin: Brass

APPROVALS		DATE	TITLE:		
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO.	GP01-2503WR-NP	
CHECKED			UNIT: mm	SCALE: 1:1	PROJ.
APPROVALS			ANGLE		SHEET 1 OF 1
TOLERANCES ARE			30~0.1	±0.30	
			10~30	±0.20	
			5~10	±0.15	
			~ 5	±0.10	
			±2°		
			DRAWING NO.		
GEPU 歌普					
NEW					
DESCRIPTION.					
ECN NO.	REV.	DATE.			