ROHS

www.gepu.tw

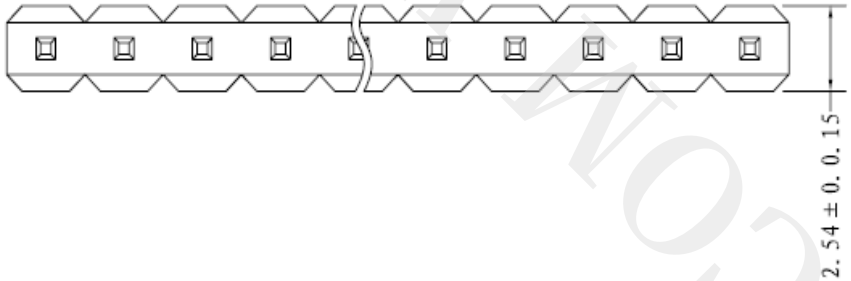

Specifications
Current Rating: 3 Ampere
Insulation Resistance: 1000M Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 20m Max.
Operating Temperature: −40° C to +105° C
Materials
Contact Material: Brass
Contact Plating: Au or Sn over 50U" Nickel
Insulator : Glass Filled Polyester (UL 94V-0)
PBT Black

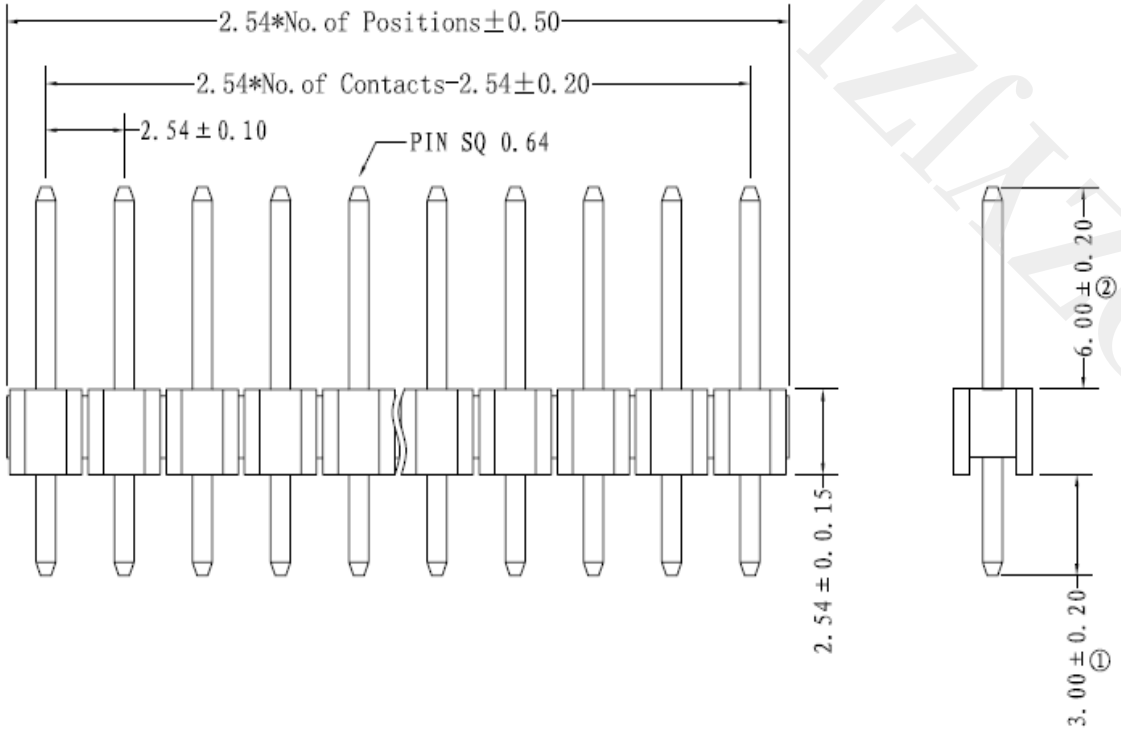

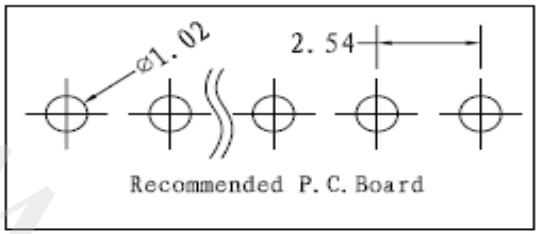

WWW.DZJIZI.COM

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

GEPU歌普

TITLE:	
PART NO.	GP26-2520WV-NP
UNIT: mm	SCALE: 1:1 PROJ:
DRAWING NO.	SHEET 1 OF 1

TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~5 ±0.10; ANGLE ±2°

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———