



1

2

3

4

5

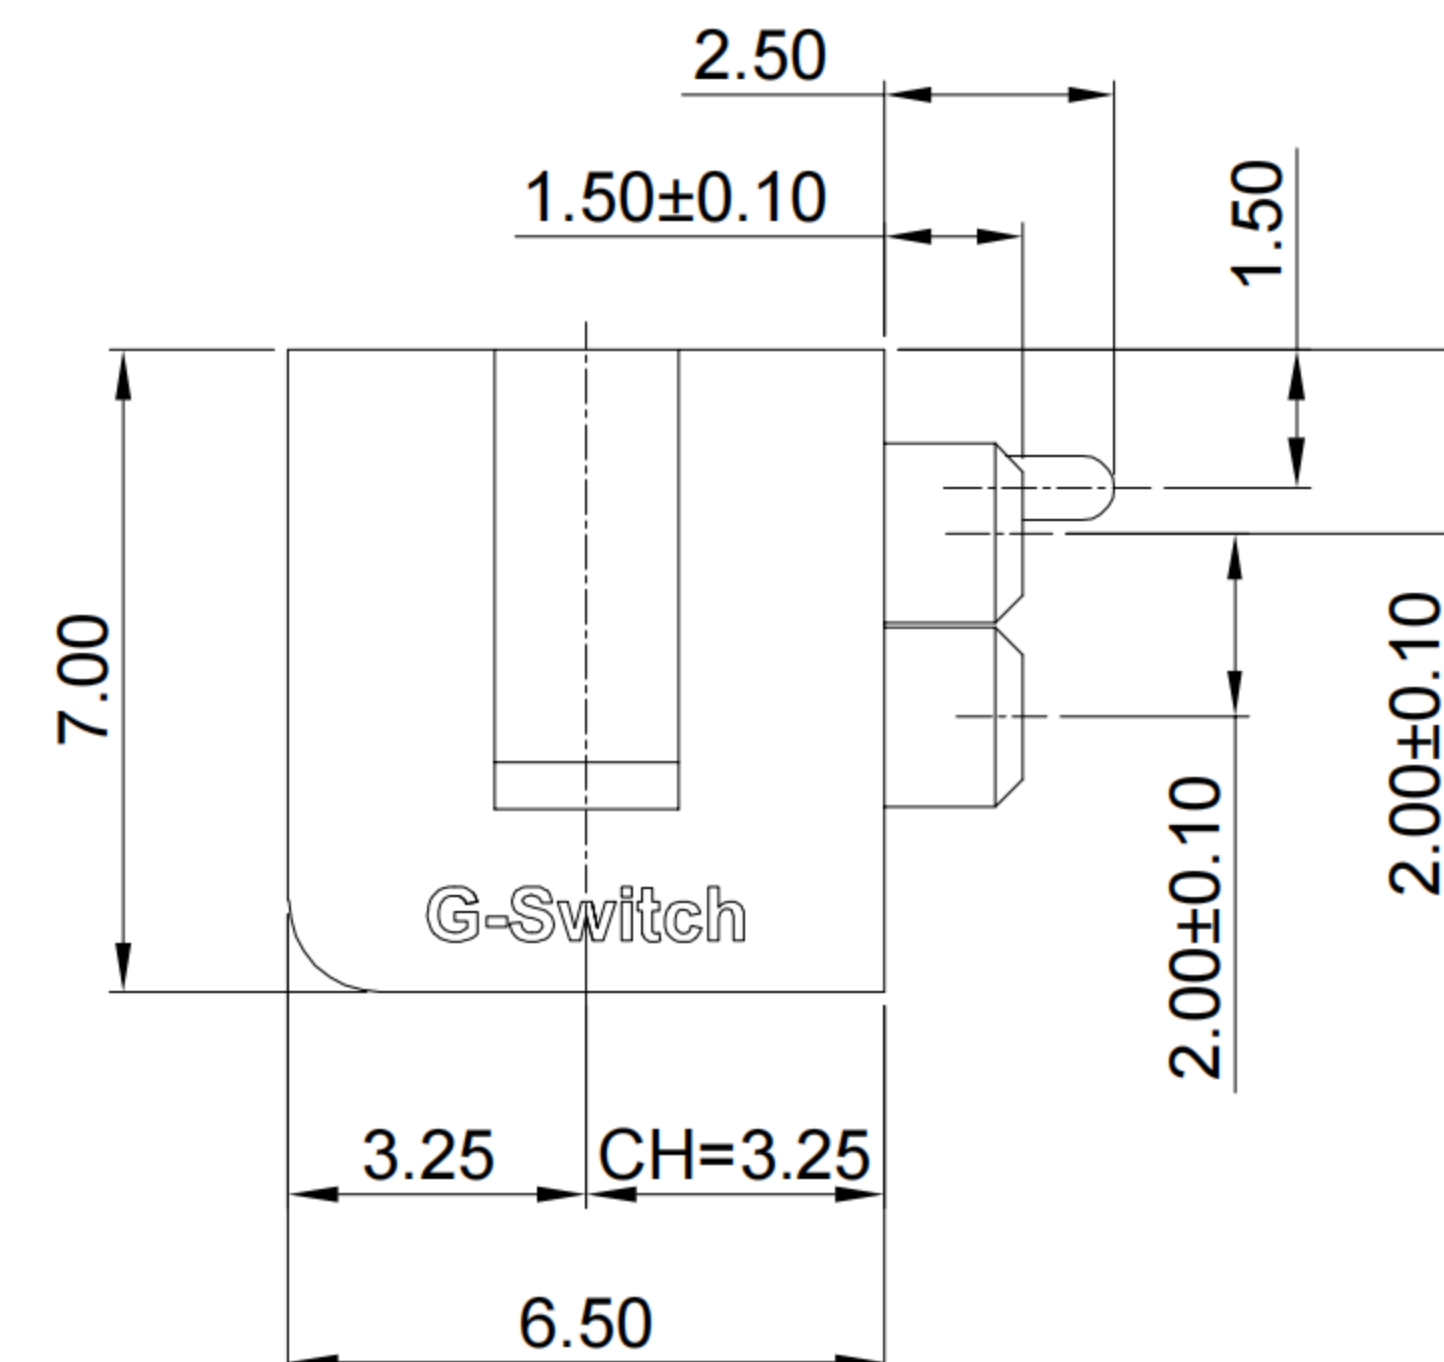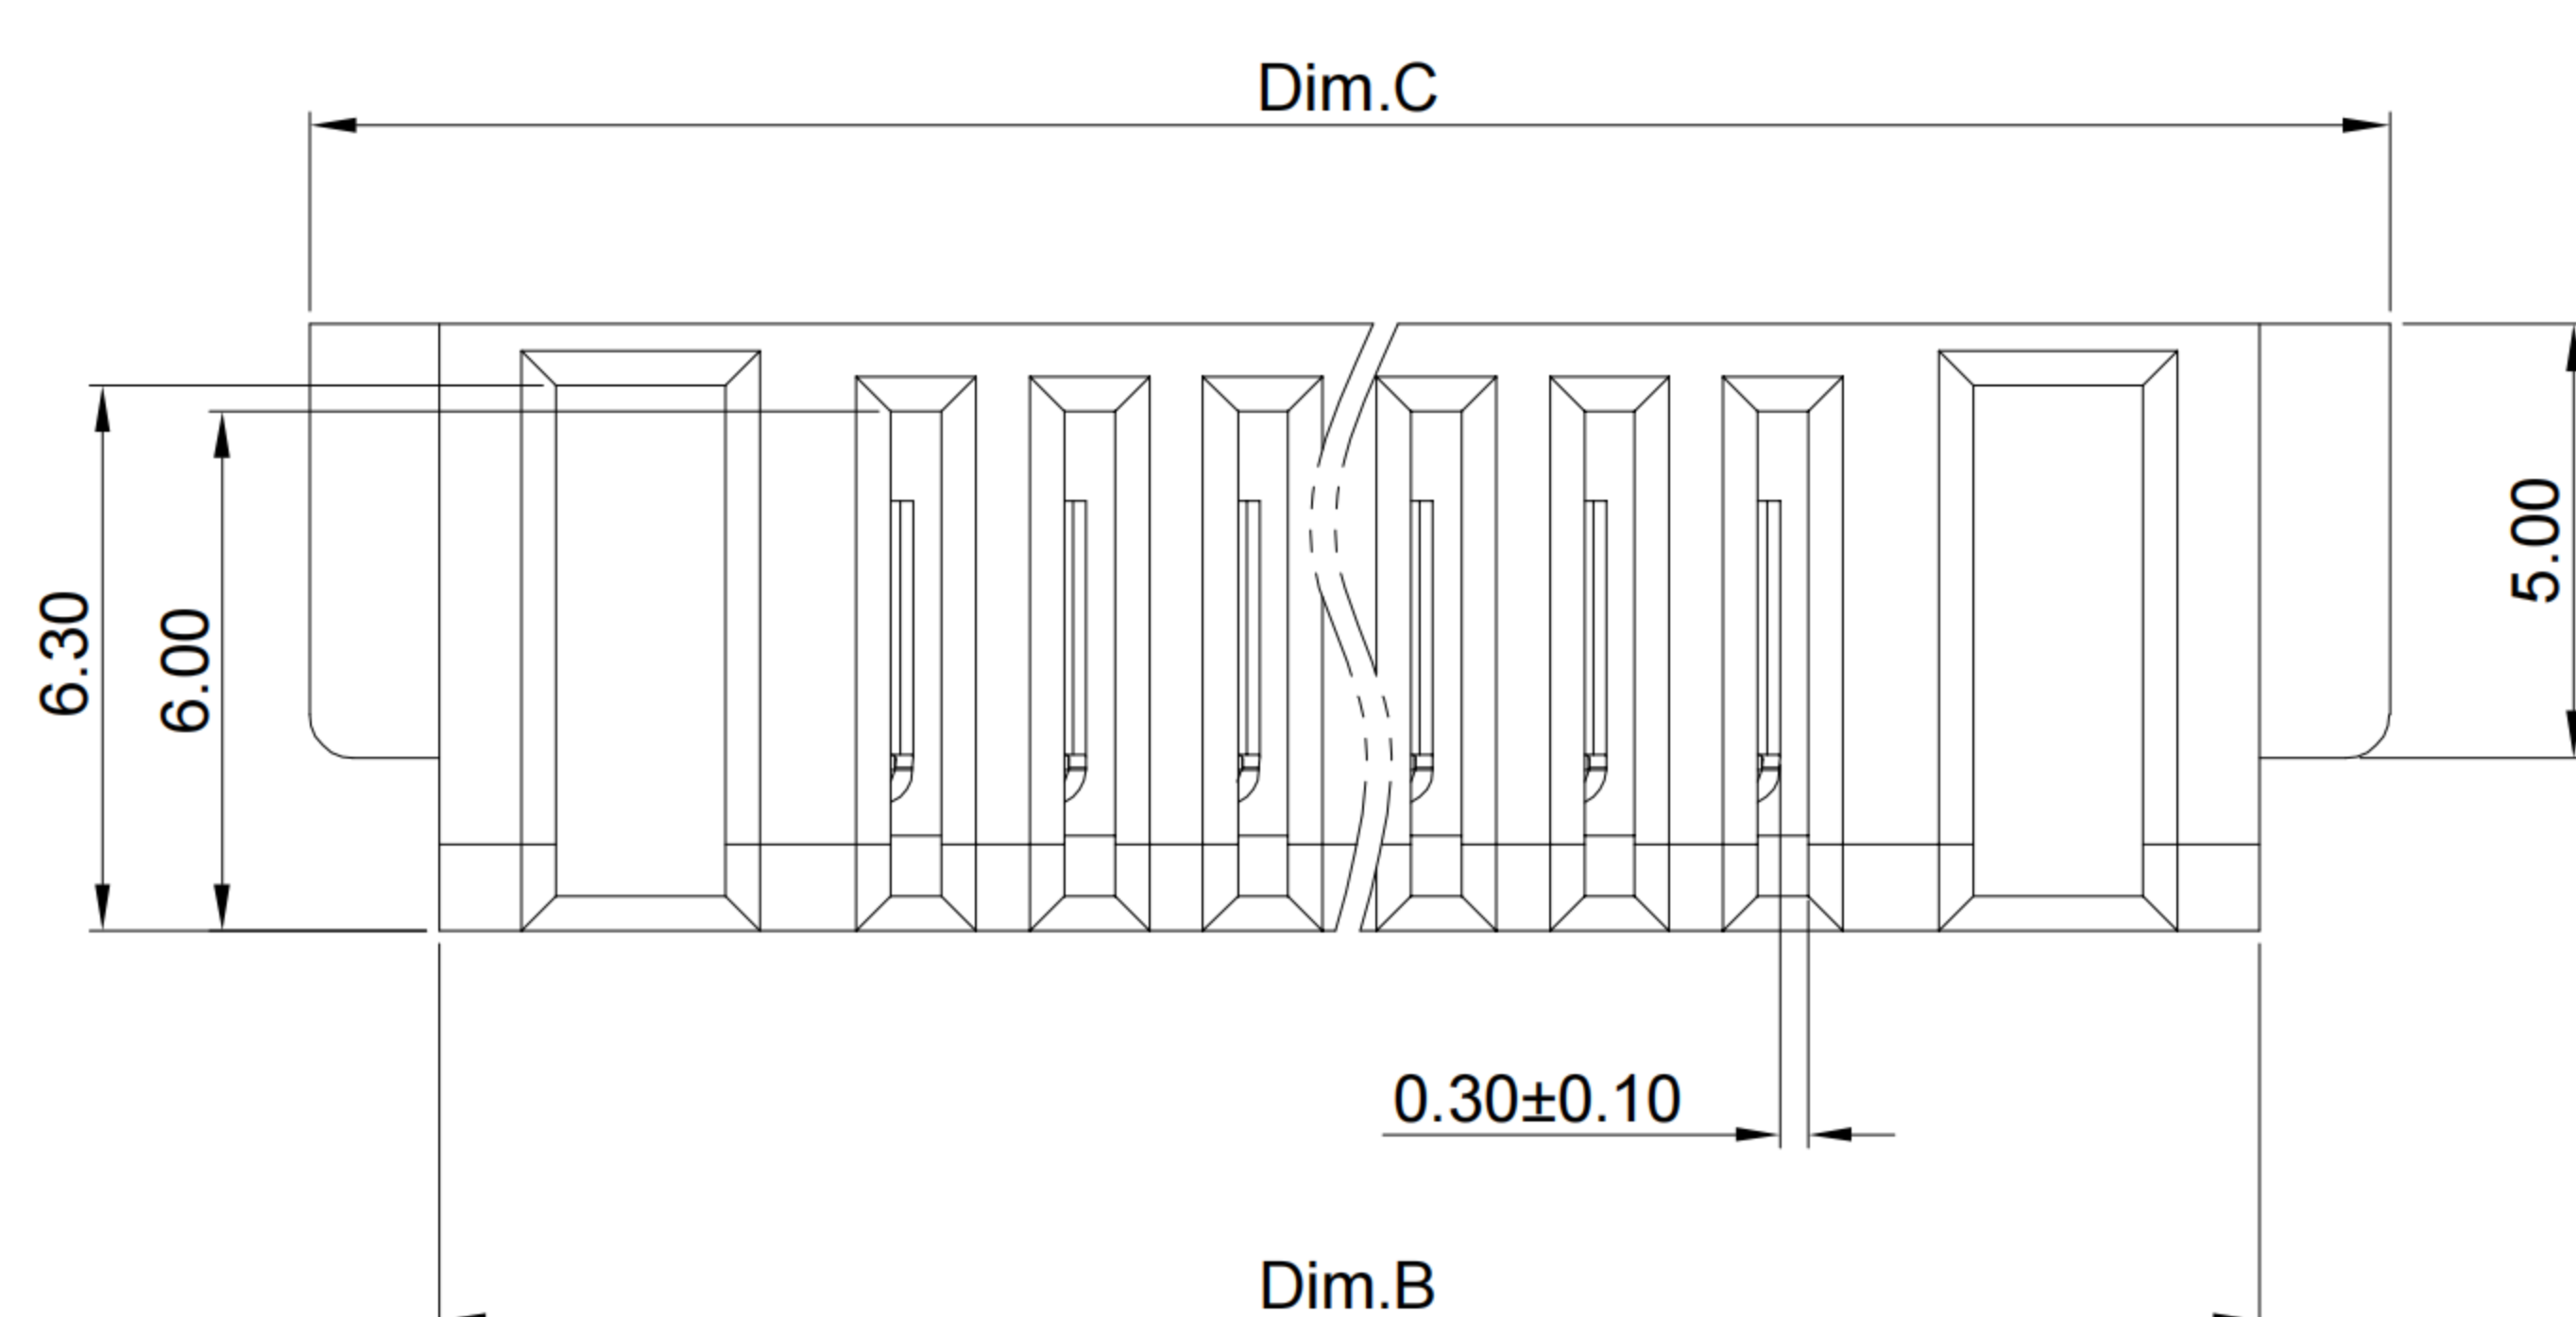

GT-BT R 200 XX - 0650 A - 002A

G-Switch

Series
BT: Battery

Type
R: Receptacle

Pitch
200=2.00



Serial code

Detail
A: With column
B: No column

Height
0650=650

Pin Q' PY

02=2Pin 08=8Pin
03=3Pin 09=9Pin
04=4Pin 10=10Pin
05=5Pin 11=11Pin
06=6Pin 12=12Pin
07=7Pin

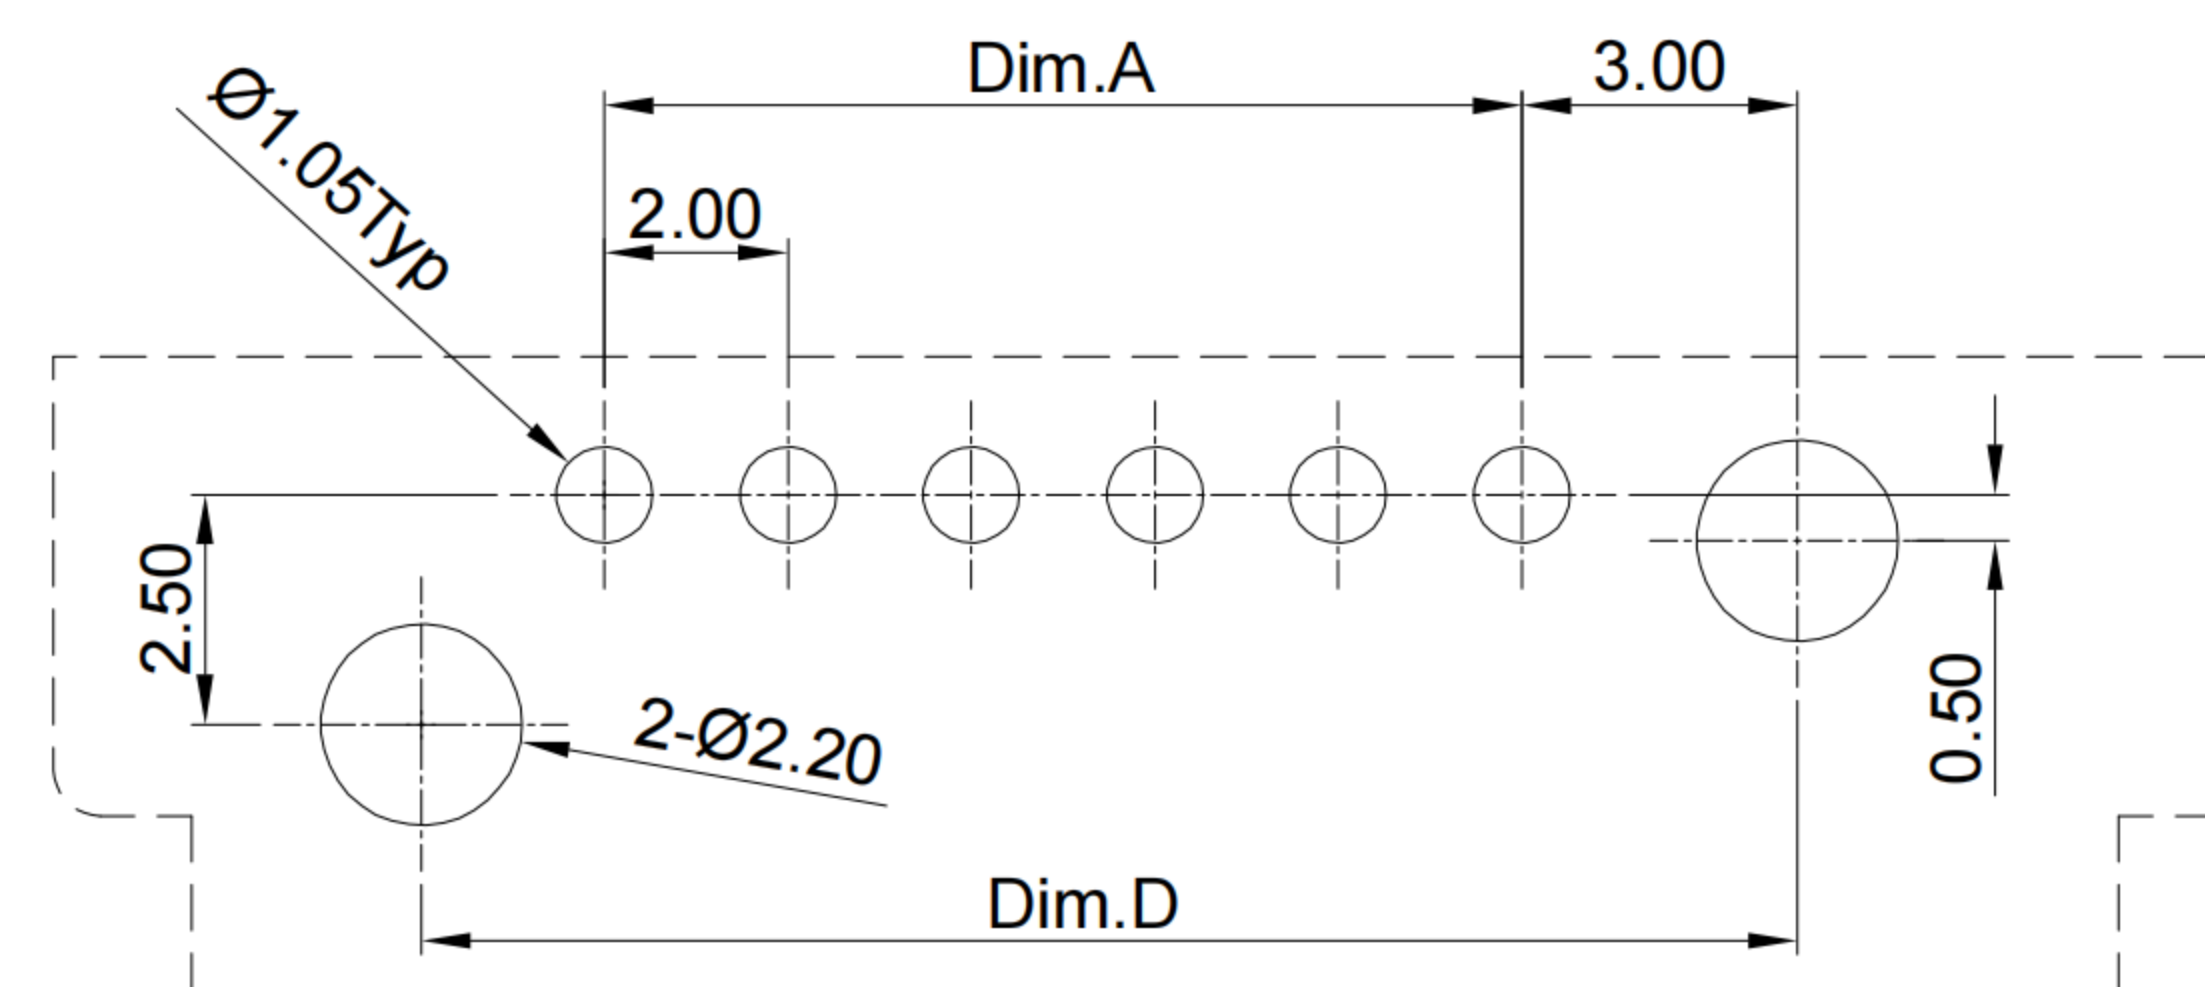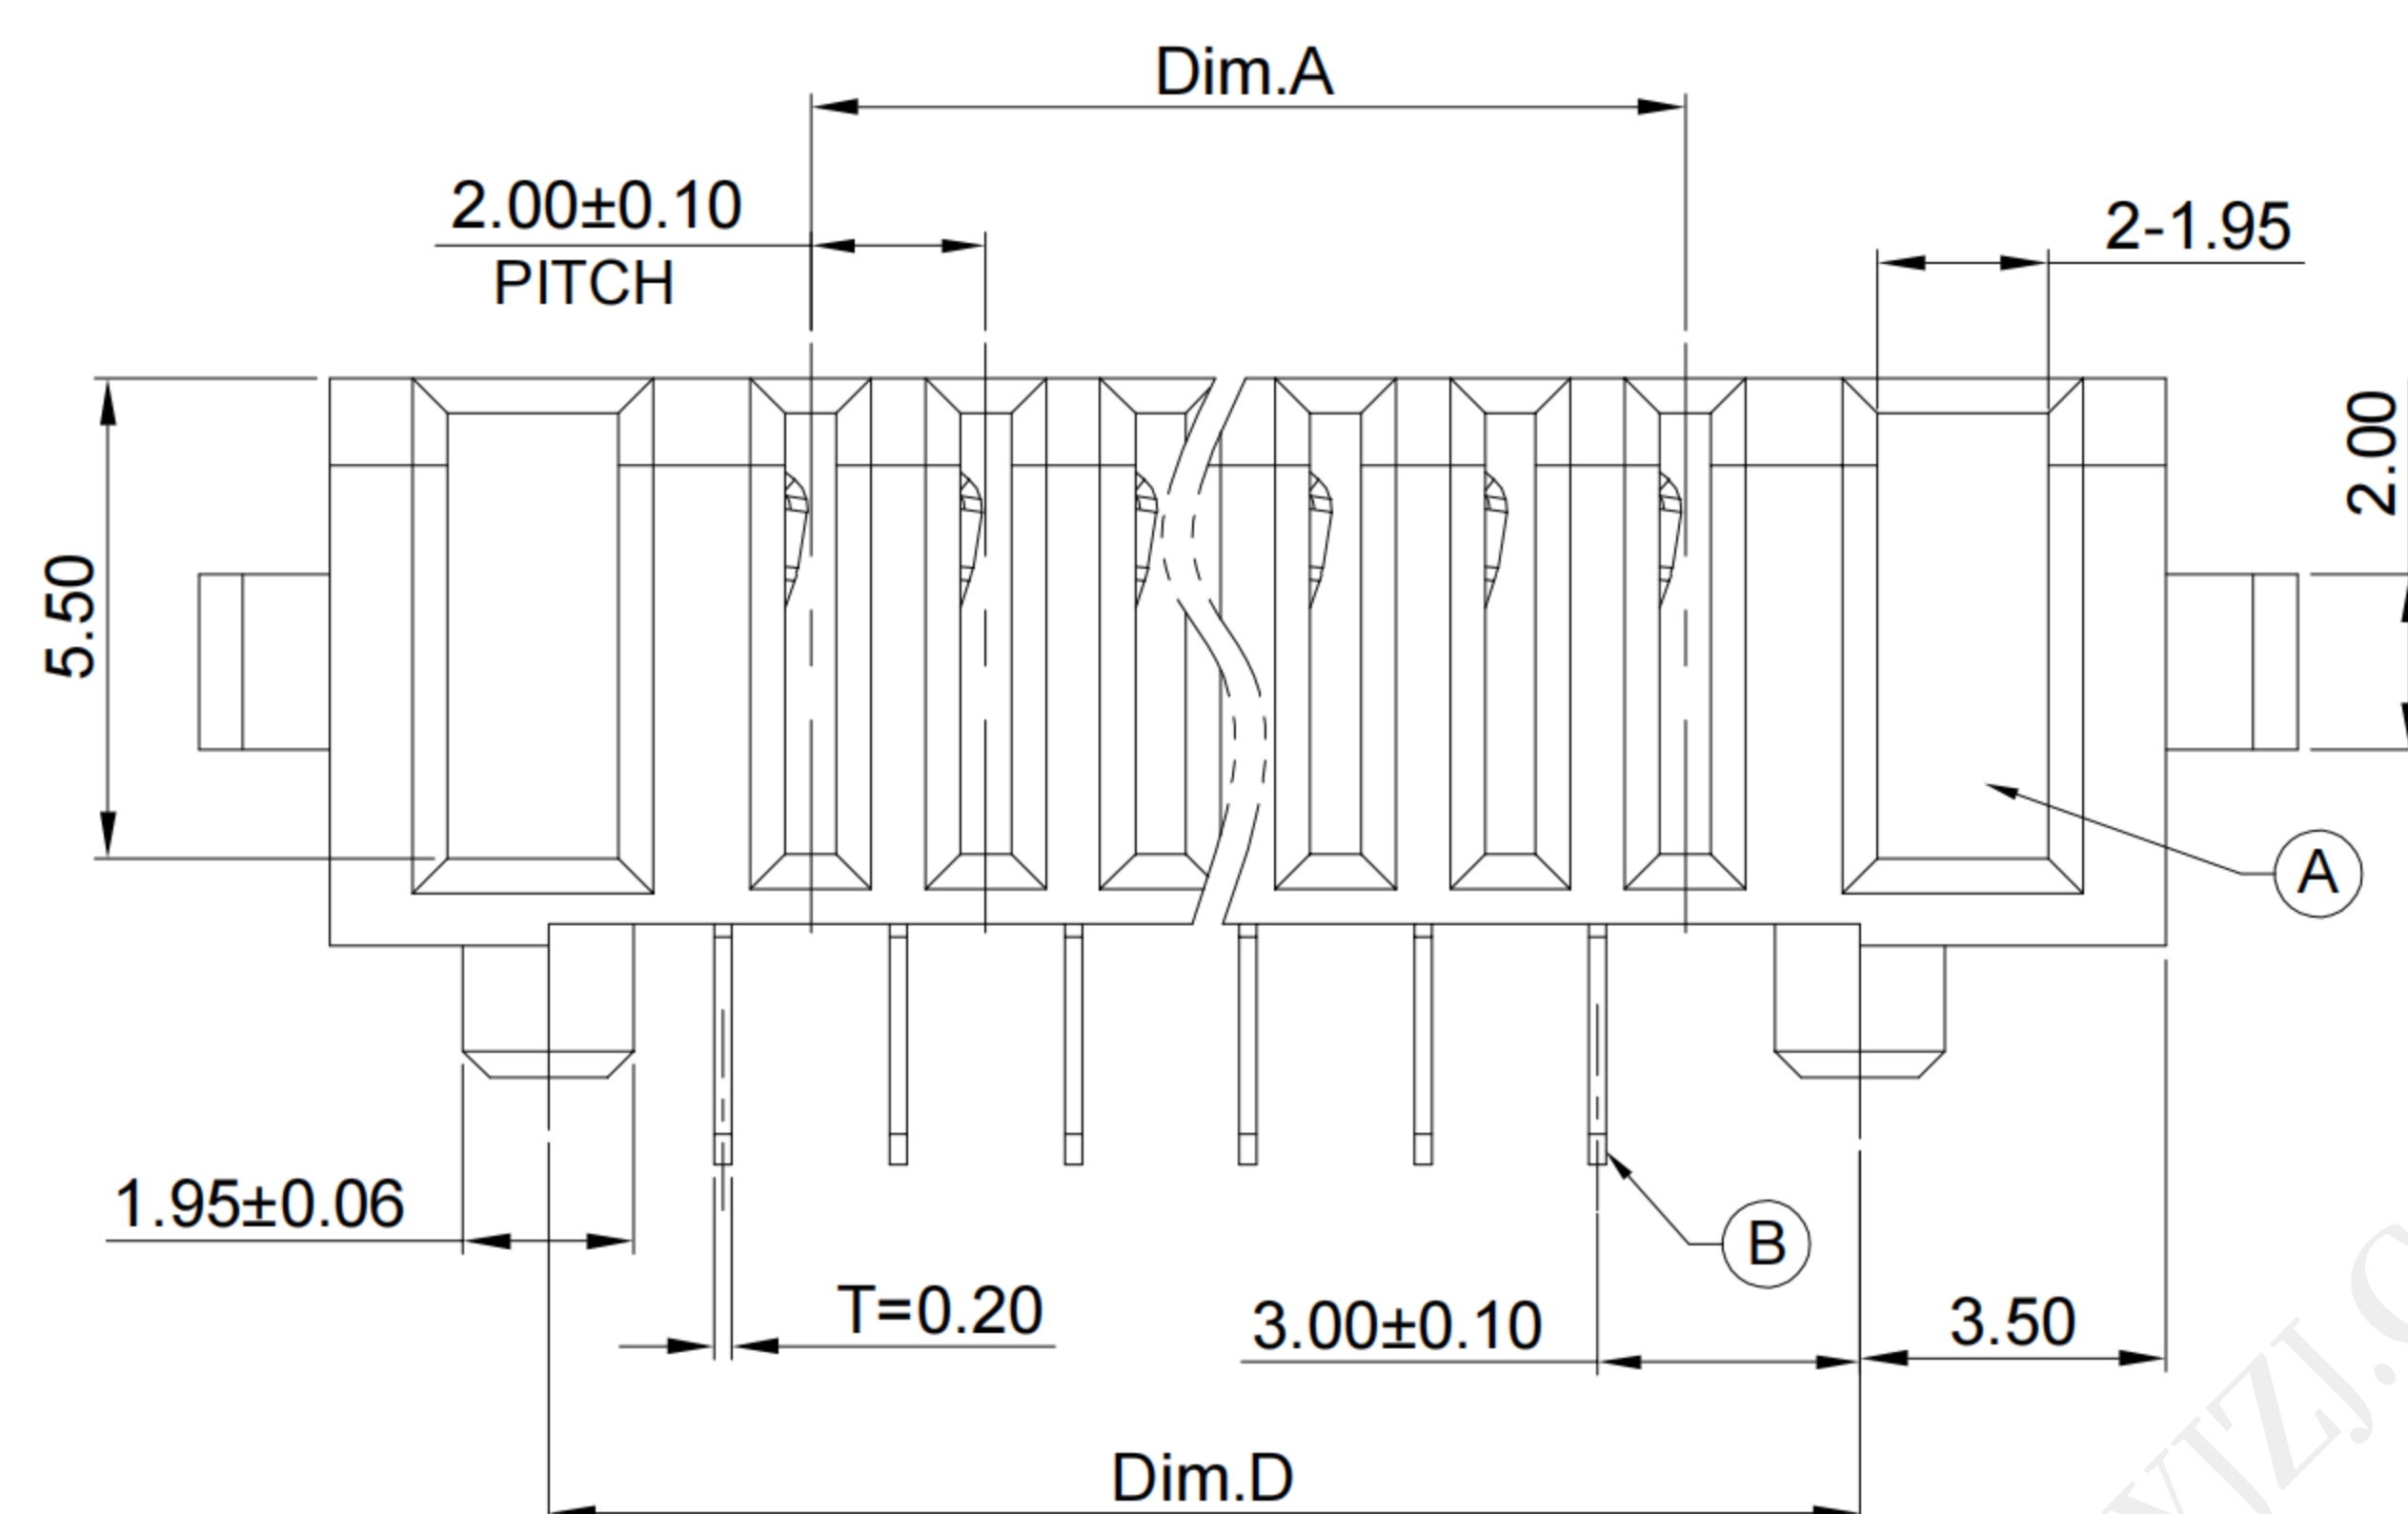


G-Switch Specification:

- 1.Current rating: 5A
- 2.Rated Voltage: 20V DC
- 3.Insulation resistance: 100MΩ min
- 4.Contact resistance: 30mΩ max
- 5.Dielectric strength: 500V RMS
- 6.Durability: 10,000cycles
- 7.Operating temperature range: -40℃ ~ +105℃

Ordering Information:

Circuit	Dimensions(mm)			
	A	B	C	D
02	2.00	13.00	16.00	7.00
03	4.00	15.00	18.00	9.00
04	6.00	17.00	20.00	11.00
05	8.00	19.00	22.00	13.00
06	10.00	21.00	24.00	15.00
07	12.00	23.00	26.00	17.00
08	14.00	25.00	28.00	19.00
09	16.00	27.00	30.00	21.00
10	18.00	29.00	32.00	23.00
11	20.00	31.00	34.00	25.00
12	22.00	33.00	36.00	27.00



RoHS
Compliant
EU RoHS Standards



SCALE: 1:1 UNIT: mm
SIZE: A4

Unless otherwise
General Tolerance:

X ±0.50
X.x ±0.30
X.xx ±0.20
X° ±2°

Title: Horizontal Pitch2.0 Battery Conn
DIP CH=3.25 C×5.0×H6.5mm

Molde Code: GT-BTR200XX-0650A-002A

DRAWN	CHECKED	APPROVED	DATE
Jiang	Xia	Chen	2023.12.28

品赞科技®
b-Switch
www.dg-switch.com

REV: A0 SHEET: 1/1