


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	01	BATCH PRODUCTION INITIAL RELEASE.	2020.04.14	李全榮

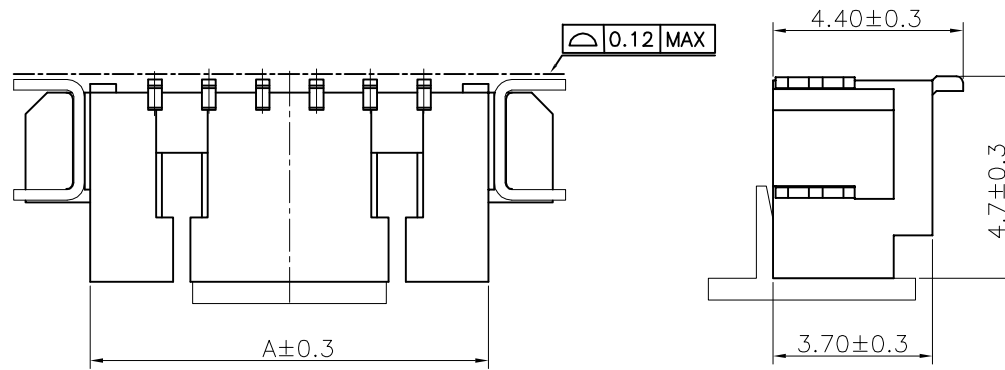

Specifications

Current Rating:1Amp AC/DC

Voltage Rating:125V AC/DC

Contact Resistance:20mΩ Max.

Insulation Resistance:100MΩ Min.

Dielectric Withstanding Voltage:500VAC




Temperature Range:-40°C to +105°C

Materials


Contact Material:Bhosphor Bronze

Insulator Material:LCP UL 94V-0

All materials must meet GREENCONN hazardous substances control standards.

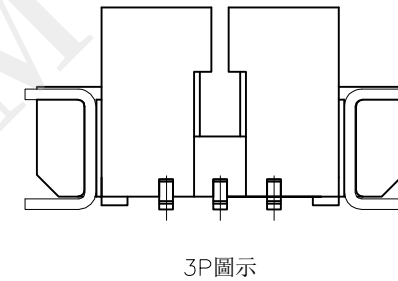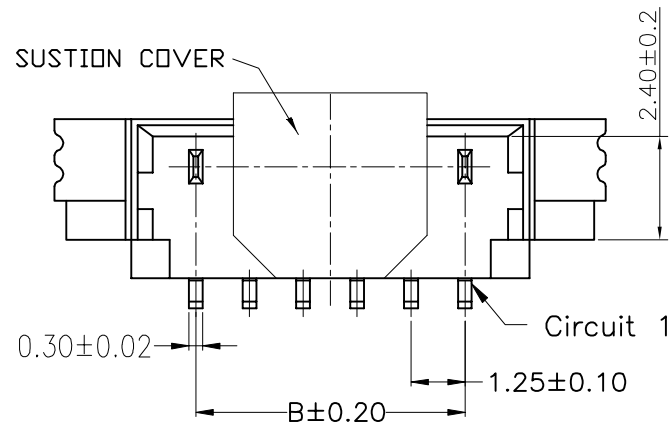

CIRCUITS	DIM A	DIM B
02	4.25	1.25
03	5.50	2.50
04	6.75	3.75
05	8.00	5.00
06	9.25	6.25
07	10.50	7.50
08	11.75	8.75
09	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50

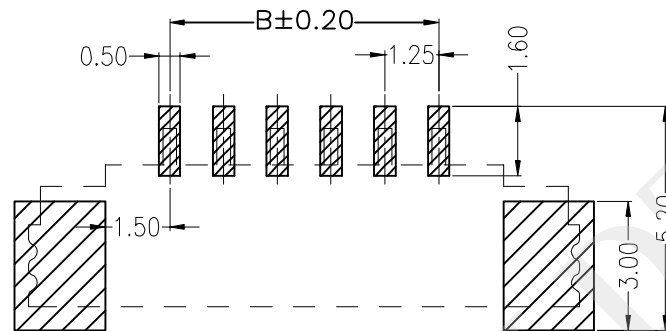

PCB ALYOUT(±0.05)

Ordering Information

G WDC102 - XX XX A 012 C X S X-9B

No. of Pins per Row 02~15 Standard Plating 01=Tin Color 2=White Standard Packing F=CAP+Tape&Reel

格稜股份有限公司
Greenconn Corporation

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE		DESIGNED: 李全堯	DATE: 2020.04.14	DWG. NO. GWDC102-CA12CS	TITLE. 1.25mm pitch Wafer
					X.*±	X.±				
					.X*±	.X±0.25	CHECKED: 方秋香	DATE: 2020.04.14	PART NO. GWDC102-XXXXA012CX SX-9B	
					.XX*±	.XX±0.15				
REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1		.XXX*±	.XXX±0.10	APPROVED: 方秋香	DATE: 2020.04.14		