
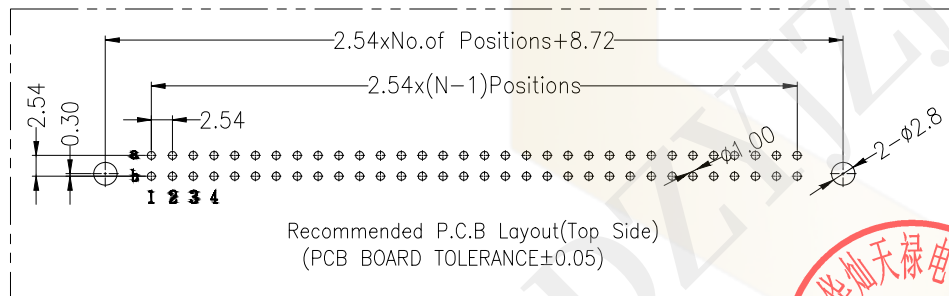
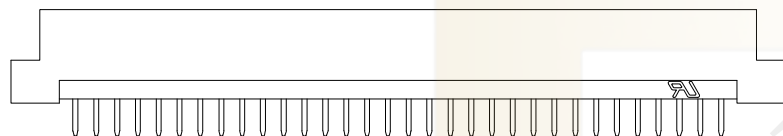


SPECIFICATIONS  
Rated Current:3.0AMP  
Contact Resistance:30mΩ Max  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°c to +105°c

Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:Polyester(UL94V-0)  
Standard: PBT  
Max.Processing Temp: 180°C for 30-60 seconds  
(200°C for 10 seconds)

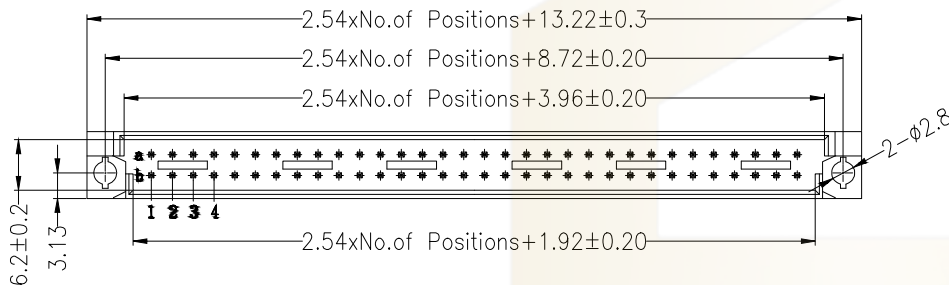

| Dimension antitheses list |      |
|---------------------------|------|
| ITEM                      | A    |
| Standard                  | 4.00 |

### Ordering Information

|                                                           |                                                    |                      |                        |                                                                                                                                                               |                      |                                      |
|-----------------------------------------------------------|----------------------------------------------------|----------------------|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------------|
| HC-CZ 254                                                 | - *                                                | - N                  | - Z                    | - *                                                                                                                                                           | - **                 | - *                                  |
| No. of Rows<br>2= Dual Row<br>3= Three Row<br>4= Four Row | No. of Pins<br>10/16/20Pin<br>32/44/48Pin<br>64Pin | Type<br>2-直针<br>4-弯针 | Length<br>(mm)<br>(塑料) | Contact<br>G0: Gold Flash<br>G1: 1u" Gold<br>G2: 3u" Gold<br>G3: 5u" Gold<br>G4: 10u" Gold<br>G5: 15u" Gold<br>G6: 30u" Gold<br>S0: Gold Flash/Tin<br>S1: Tin | Plating<br>(Plastic) | Contact Type<br>F= female<br>M= male |

|                   |                        |                   |                  |                                                           |                          |             |
|-------------------|------------------------|-------------------|------------------|-----------------------------------------------------------|--------------------------|-------------|
| GENERAL TOLERANCE |                        |                   | 制图<br>DRAWING    | 深圳市华灿天禄电子有限公司<br>ShenzhenhuacantianluELECTRONICS CO., LTD |                          |             |
| DIM               |                        | TOL               | 审核<br>CHECK      | 产品名称<br>TITLE                                             | 欧式插座 2.54 双排 直公座         | 版本<br>REV.  |
| X. X              |                        | ±0.30             | 批准<br>APPROVAL   | 产品料号<br>PART NO.                                          | HC-CZ254-2-N-Z-11.5-XX-M | 单位<br>UNITS |
| X. XX             |                        | ±0.20             | 比例<br>SCALE      | 材料<br>MATERIAL                                            |                          | 页次<br>SHEET |
| X. XXX            |                        | ±0.10             | 投影<br>Projection |                                                           |                          | 1/1         |
| Angle             |                        | ±3.0°             |                  |                                                           |                          |             |
| 序号<br>No.         | 变更内容<br>MODIFY CONTENT | 日期<br>MODIFY DATE |                  |                                                           |                          |             |