


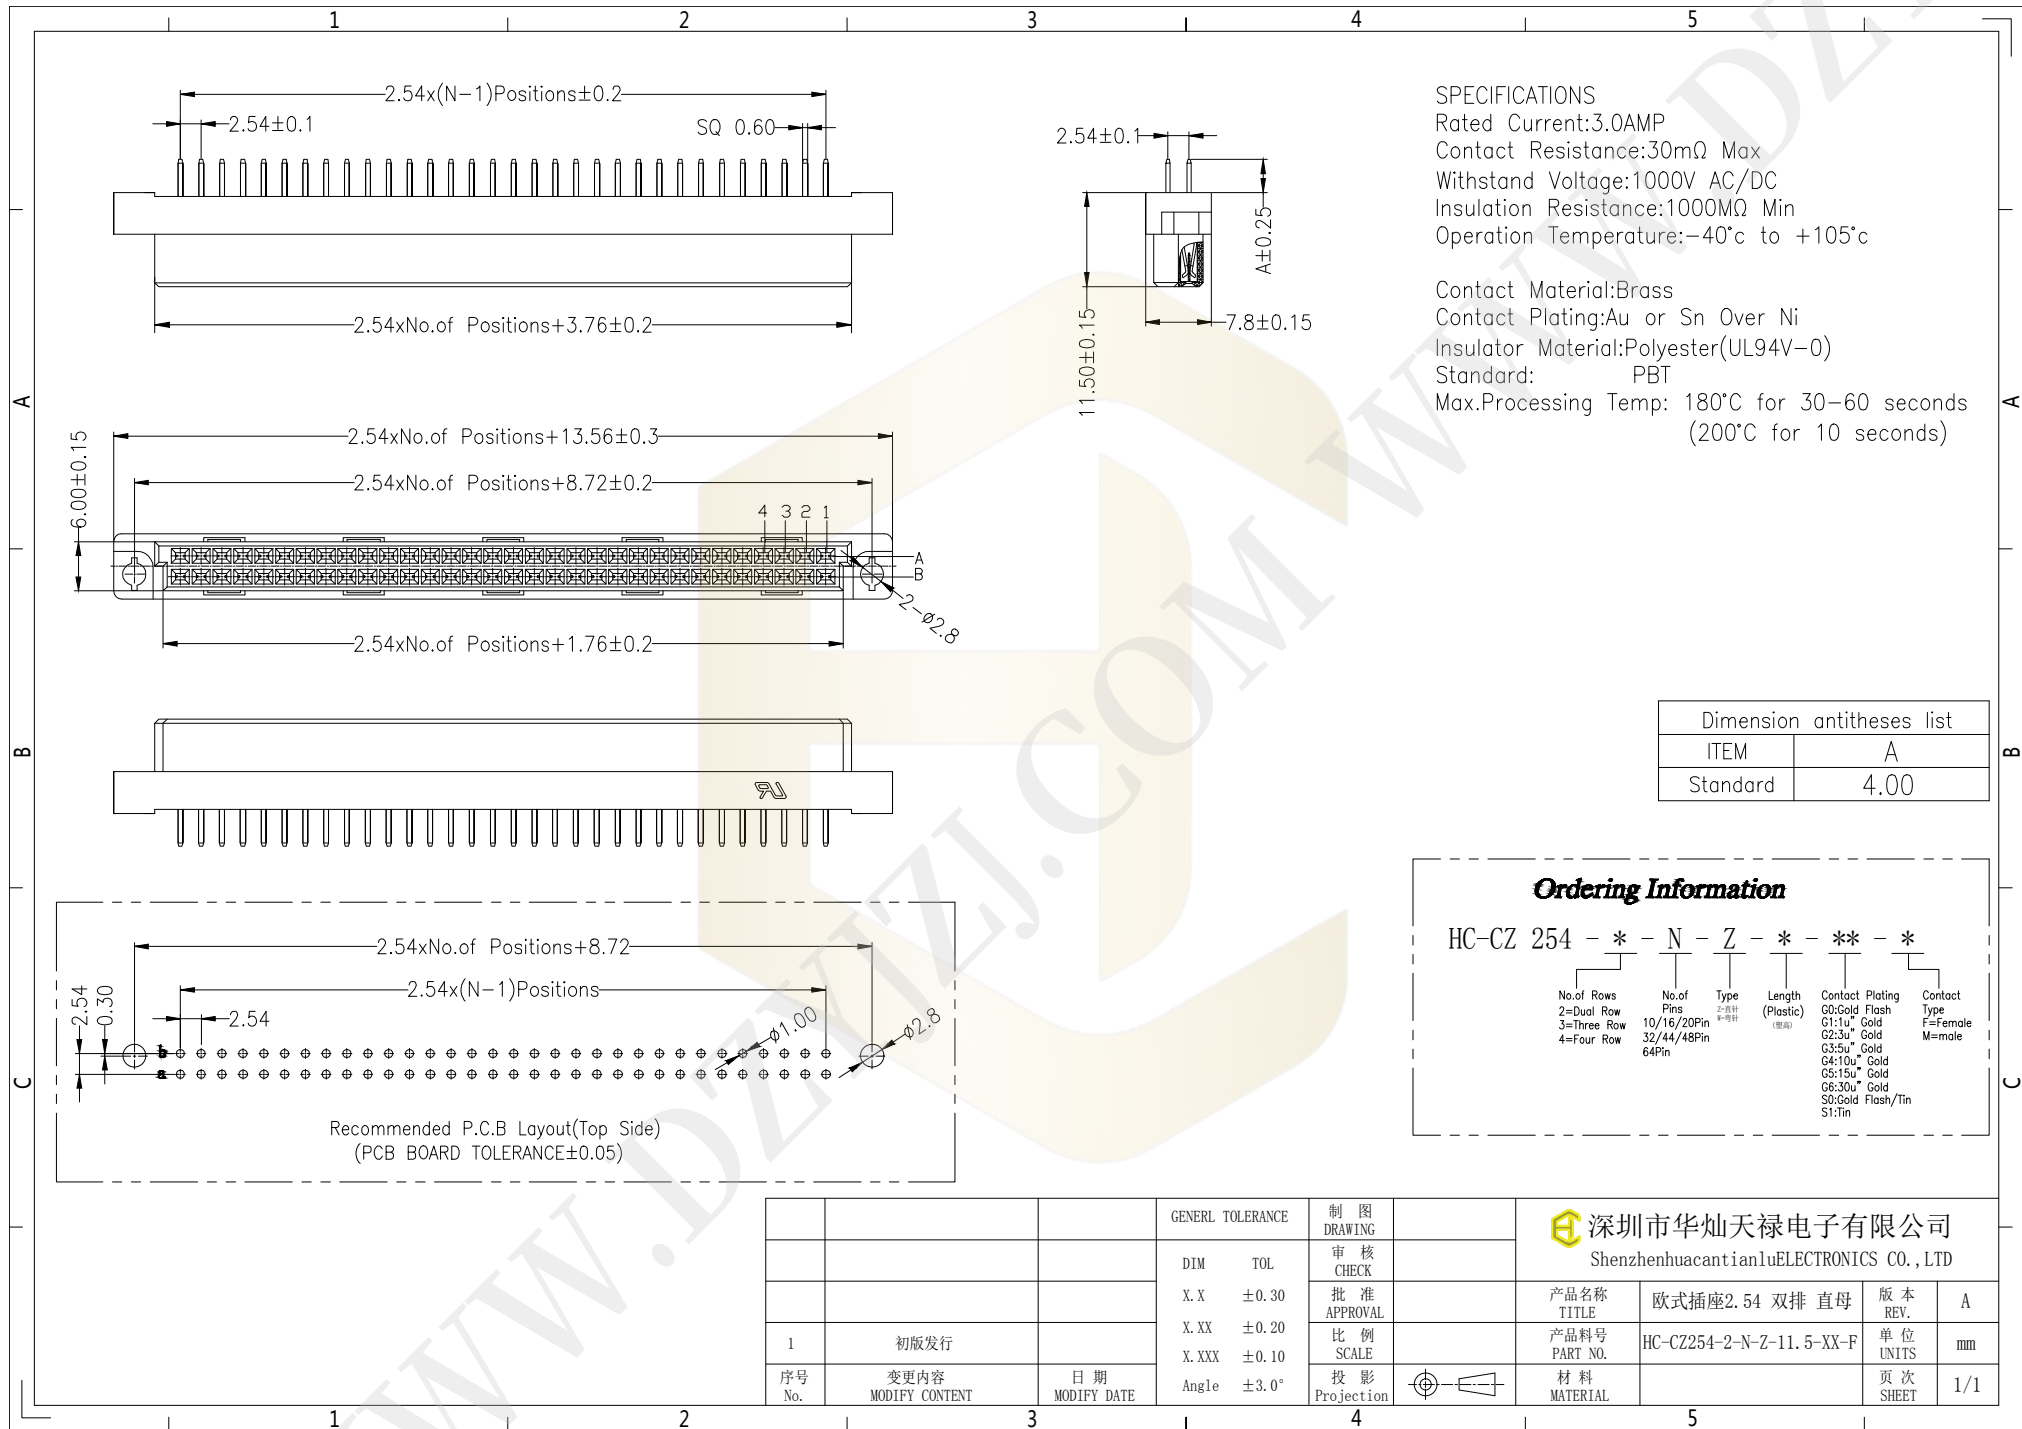

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:30mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Dimension antitheses list	
ITEM	A
Standard	4.00

Ordering Information

HC-CZ 254	- *	- N	- Z	- *	- **	- *
No. of Rows 2=Two Row 3=Three Row 4=Four Row	No. of Pins 10/16/20Pin 32/44/48Pin 64Pin	Type Z=直针 W=弯针	Length (mm) (mm)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Contact Type F=Female M=Male	

GENERAL TOLERANCE			制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD		
DIM TOL			审 核 CHECK	产品名称 TITLE	欧式插座 2.54 双排 直母	版本 REV.
X.X ±0.30			批 准 APPROVAL	产品料号 PART NO.	HC-CZ254-2-N-Z-11.5-XX-F	单 位 UNITS
X.XX ±0.10			比 例 SCALE	材料 MATERIAL		页 次 SHEET
X.XXX ±0.10			投 影 Projection			1/1
Angle ±3.0°						
1	初版发行					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE				