

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C




Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(230°C for 10 seconds)

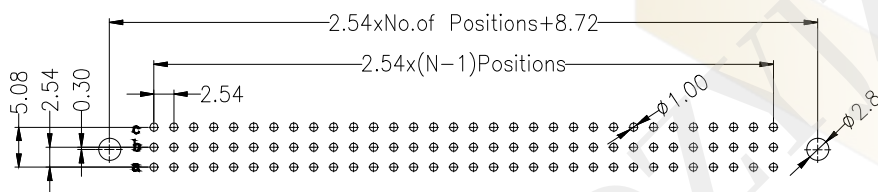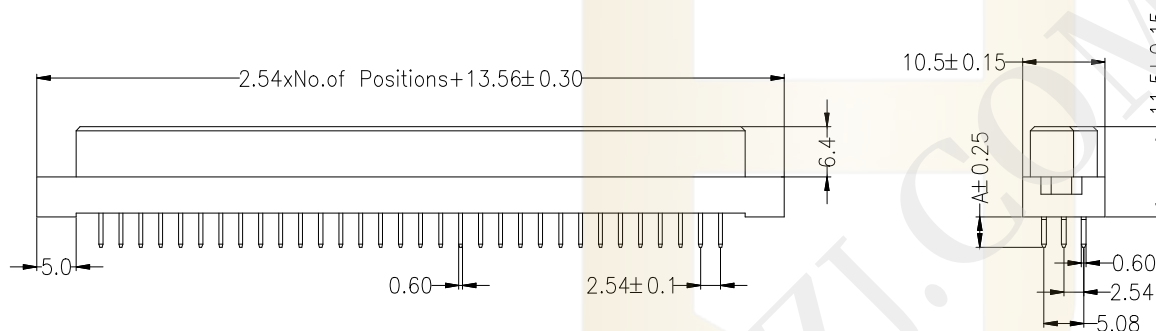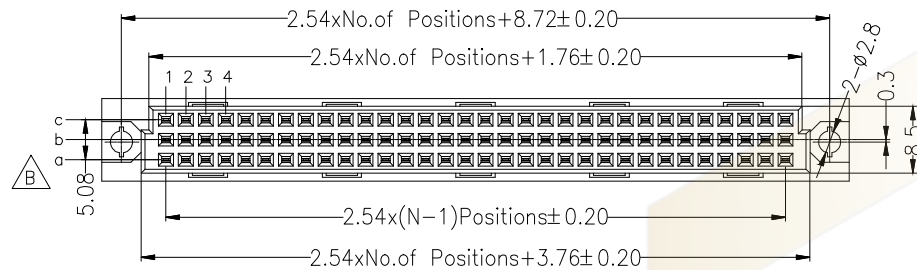

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

Dimension antitheses list

ITEM	A
Standard	4.00

Ordering Information

HC-CZ 254 - * - N - Z - * - ** - *

No. of Rows	No. of Pins	Type	Length (mm)	Contact Plating	Contact Type
2= Dual Row	10/16/20Pin	W= 弯针	(100mm)	G0: Gold Flash	F= Female
3= Three Row	32/44/48Pin			G1: 1u" Gold	M= Male
4= Four Row	64Pin			G2: 3u" Gold	
				G3: 5u" Gold	
				G4: 10u" Gold	
				G5: 15u" Gold	
				G6: 30u" Gold	
				S0: Gold Flash/Tin	
				S1: Tin	

GENERAL TOLERANCE			制图	深圳市华灿天禄电子有限公司			
			DRAWING	ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	审核	产品名称	版本
			X. X	±0.30	CHECK	TITLE	REV.
			X. XX	±0.20	批准	产品料号	单位
			X. XXX	±0.10	APPROVAL	HC-CZ254-3-N-Z-11.5-XX-F	mm
			Angle	±3.0°	比例	材料	页次
			投影		SCALE		SHEET
序号	变更内容	日期	投影		投影		
No.	MODIFY CONTENT	MODIFY DATE	Projection		Projection		