
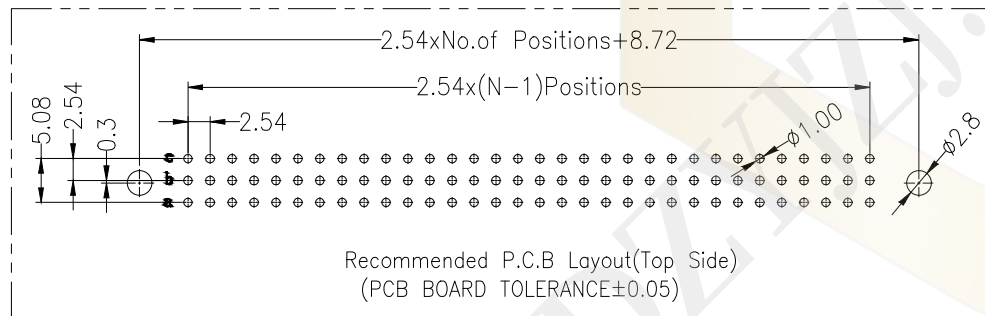
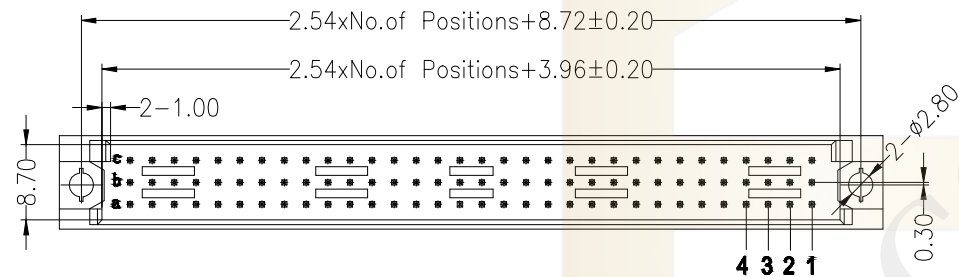



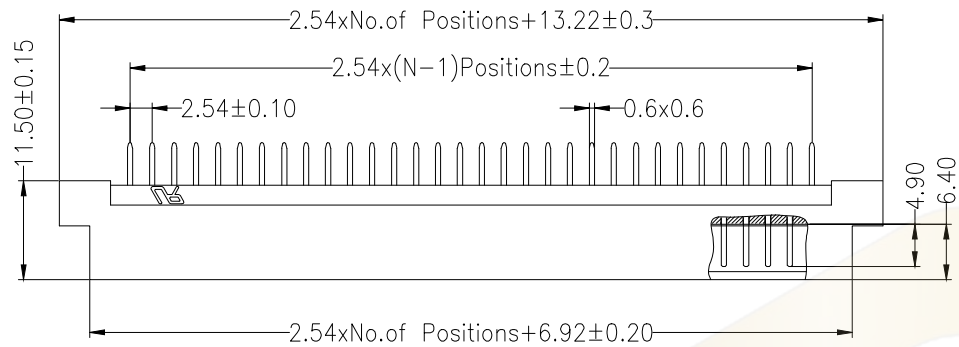

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:30mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Contact Material:Brass

Contact Plating:Au or Sn Over Ni

Insulator Material:Polyester(UL94V-0)

Standard: PBT

Max.Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

Dimension antitheses list

ITEM	A
Standard	4.00

Ordering Information

HC-CZ 254	- *	- N	- Z	- *	- **	- *
No. of Rows 2= Dual Row 3= Three Row 4= Four Row	No. of Pins 10/16/20Pin 32/44/48Pin 64Pin	Type Z=直针 弯针	Length (Plastic) (塑胶)	Contact Plating G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin	Contact Type F=Female M=Male	

			GENERAL TOLERANCE		制图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM	TOL	DRAWING				
			X.X	±0.30	审核	产品名称	欧式插座2.54 三排 直公座	版本	A
			X.XX	±0.20	批准	TITLE		REV.	
			X.XXX	±0.10	APPROVAL	产品料号	HC-CZ254-3-N-Z-11.5-XX-M	单位	mm
			Angle	±3.0°	SCALE	PART NO.		UNITS	
序号	变更内容	日期			投影	材料		页次	1/1
No.	MODIFY CONTENT	MODIFY DATE			Projection	MATERIAL		SHEET	