




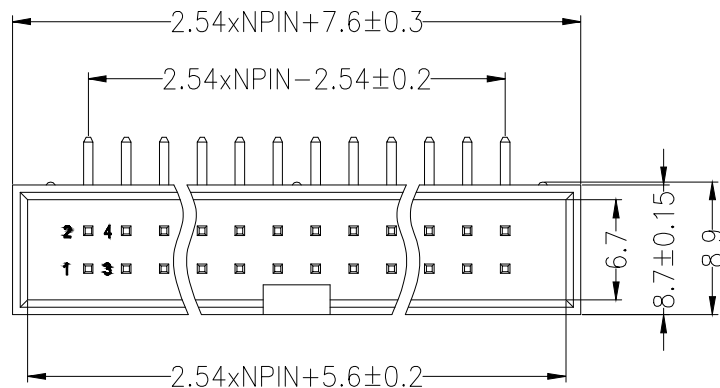


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

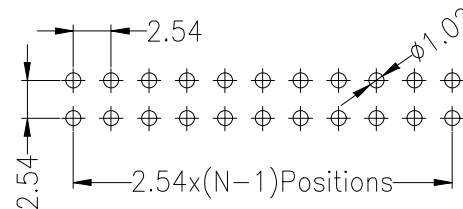

SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

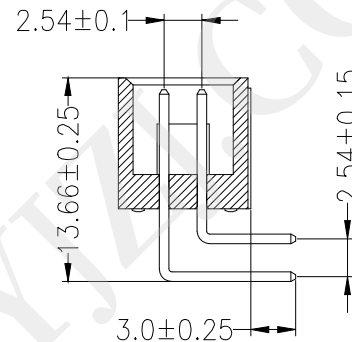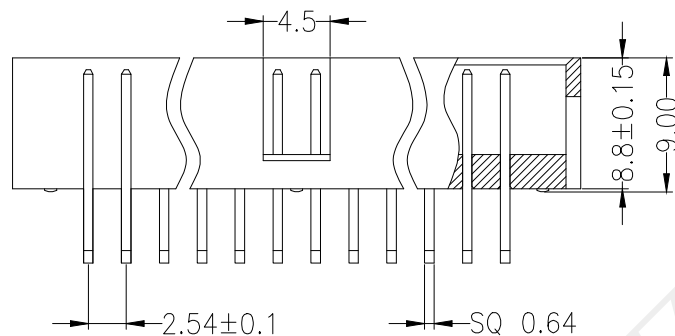

Ordering Information

HC-JN 254 - * - N - Z - * - **

No. of Rows
1=Single Row
2=Dual Row
No. of Pins
6-64Pin
Type
2: 2 Pin
W: 4 Pin
S: 8 Pin
8P: 8 Pin
Length
(Pitch)
Contact Plating
G0: Gold Flash
G1: 1u" Gold
G2: 3u" Gold
G3: 5u" Gold
G4: 10u" Gold
G5: 15u" Gold
G6: 30u" Gold
S0: Gold Flash/Tin
S1: Tin

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM	TOL	DRAWING				
					审 核				
			X. X	±0.30	批 准	产品名称	筒牛 2.54 双排 排母 弯针	版本	A
			X. XX	±0.20	APPROVAL	TITLE		REV.	
			X. XXX	±0.10	比 例	产品料号	HC-JN254-2-N-W-8, 8-XX	单 位	mm
			Angle	±3.0°	SCALE	PART NO.		UNITS	
序号	变更内容	日期			投 影	材 料		页 次	1/1
No.	MODIFY CONTENT	MODIFY DATE			Projection	MATERIAL		SHEET	