
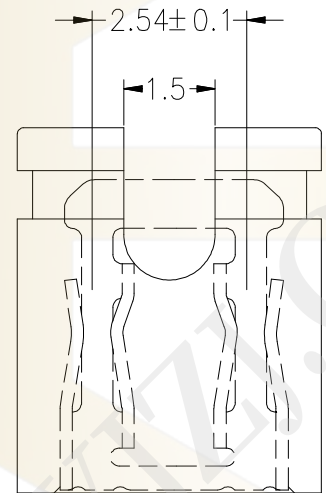
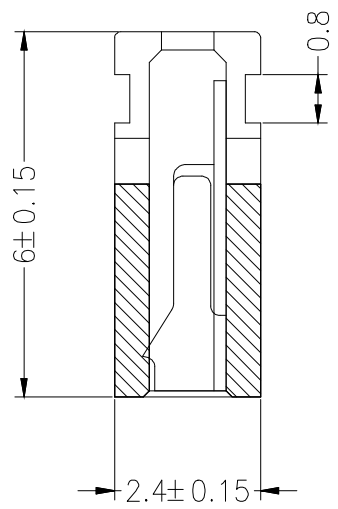




SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°c to +105°c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PBT
Max.Processing Temp: 180°C for 30-60 seconds
(230°C for 10 seconds)

Ordering Information

HC-JP	254	-	1	-	**	-	OP	-	*	-	**
No. of Rows	Length	Type	Color	Contact Plating							
1=Single Type	(mm)	OP=Open CL=Close	B=Black L=Blue R=Red W=White Y=Yellow	G0:Gold Flash G1:1u" Gold G2:3u" Gold G3:5u" Gold G4:10u" Gold G5:15u" Gold G6:30u" Gold S0:Gold Flash/Tin S1:Tin							

			GENERAL TOLERANCE		制 图	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD					
			DIM	TOL	DRAWING						
					审 核	产品名称		2.54 跳线帽 (开口)		版本	A
			X. X	±0.30	CHECK	TITLE				REV.	
			X. XX	±0.20	批 准	产品料号		HC-JP254-1-60-OP-B-XX		单 位	mm
			X. XXX	±0.10	APPROVAL	PART NO.				UNITS	
			Angle	±3.0°	比 例	材料				页 次	1/1
			序号	变更内容	日期	投影				SHEET	
			No.	MODIFY CONTENT	MODIFY DATE	Projection					