


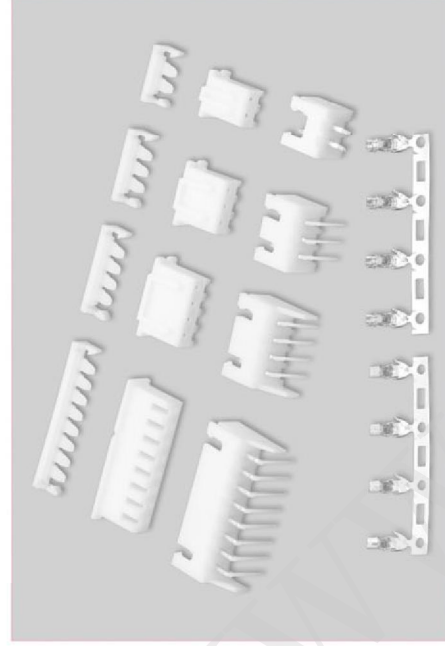

■ 技术参数 SPECIFICATIONS

- 线数 (Poles) : 2~20
- 适用线规 (Applicable wires) : AWG28#~22#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :

孔座 (Housing) : 尼龙 (Nylon) UL94V-2(0)

针座 (Wafer) : 尼龙 (Nylon) UL94V-2(0)


垫片 (Retainer) : 尼龙 (PA66) UL94V-2(0)

端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)


端子 TERMINAL (XH/TJC3)

型号 Type	适用线缆 Applicable wires mm ²	电缆外径 O.D of wire ins mm	数量 Quantity
HX25002-PT	0.08~0.33	1.0~1.8	6000PCS/盘
HX25002-PTA	0.08~0.33	1.0~1.8	5000PCS/盘


HX25002-PT (XH/TJC3)




HX25002-PTA (XH/TJC3)




HX25002-Y (XH/TJC3)





HX25003-WAG (XH/TJC3)




HX25003-WAG (XH/TJC3)




HX25002-PS (XH/TJC3)



HX25003-A (XH/TJC3)



HX25003-AN (XH/TJC3)



孔座 HOUSING (XH/TJC3)

线数 Poles	型号Type	尺寸Dimensions(mm)			
		A	B	C	
2	插孔Housing 插孔Retainer HX25002-2Y HX25002-2PS	2.5	5.7	8.9	
3	HX25002-3Y HX25002-3PS	5.0	8.2	11.4	
4	HX25002-4Y HX25002-4PS	7.5	10.7	13.9	
5	HX25002-5Y HX25002-5PS	10.0	13.2	16.4	
6	HX25002-6Y HX25002-6PS	12.5	15.7	18.9	
7	HX25002-7Y HX25002-7PS	15.0	18.2	21.4	
8	HX25002-8Y HX25002-8PS	17.5	20.7	23.9	
9	HX25002-9Y HX25002-9PS	20.0	23.2	26.4	
10	HX25002-10Y HX25002-10PS	22.5	25.7	28.9	
11	HX25002-11Y HX25002-11PS	25.0	28.2	31.4	
12	HX25002-12Y HX25002-12PS	27.5	30.7	33.9	
13	HX25002-13Y HX25002-13PS	30.0	33.2	36.4	
14	HX25002-14Y HX25002-14PS	32.5	35.7	38.9	
15	HX25002-15Y HX25002-15PS	35.0	38.2	41.4	
16	HX25002-16Y	37.5	40.7		
17	HX25002-17Y	40.0	43.2		
18	HX25002-18Y	42.5	45.7		
19	HX25002-19Y	45.0	48.2		
20	HX25002-20Y	47.5	50.7		

针座 WAFER (XH/TJC3)

球数 (Poles)	型 式 (180°)		型 式 (90°)		尺寸Dimensions(mm)	
	直式	弯式	A	B	A	B
2	HX25003-2A	HX25003-2WA	2.5	2.5	7.5	
3	HX25003-3A	HX25003-3WA	5.0	10.0		
4	HX25003-4A	HX25003-4WA	7.5	12.5		
5	HX25003-5A	HX25003-5WA	10.0	15.0		
6	HX25003-6A	HX25003-6WA	12.5	17.5		
7	HX25003-7A	HX25003-7WA	15.0	20.0		
8	HX25003-8A	HX25003-8WA	17.5	22.5		
9	HX25003-9A	HX25003-9WA	20.0	25.0		
10	HX25003-10A	HX25003-10WA	22.5	27.5		
11	HX25003-11A	HX25003-11WA	25.0	30.0		
12	HX25003-12A	HX25003-12WA	27.5	32.5		
13	HX25003-13A	HX25003-13WA	30.0	35.0		
14	HX25003-14A	HX25003-14WA	32.5	37.5		
15	HX25003-15A	HX25003-15WA	35.0	40.0		
16	HX25003-16A	HX25003-16WA	37.5	42.5		
17	HX25003-17A	HX25003-17WA	40.0	45.0		
18	HX25003-18A	HX25003-18WA	42.5	47.5		
19	HX25003-19A	HX25003-19WA	45.0	50.0		
20	HX25003-20A	HX25003-20WA	47.5	52.5		

■ 安装尺寸 MOUNTING MEASUREMENT