
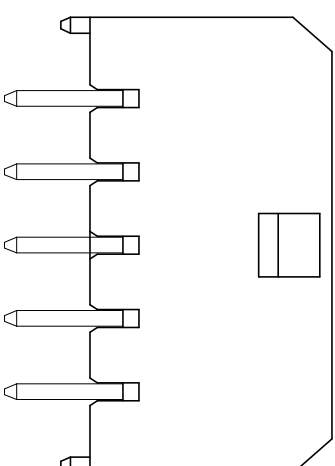
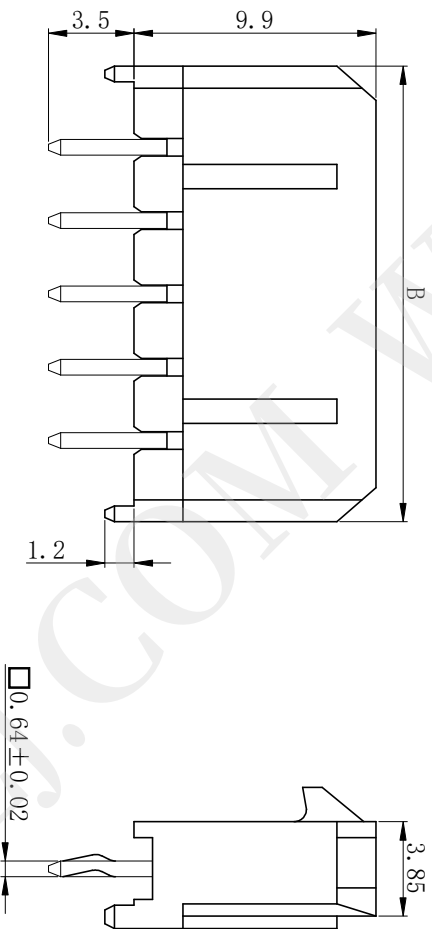


安装尺寸 MOUNTING MEASUREMENT

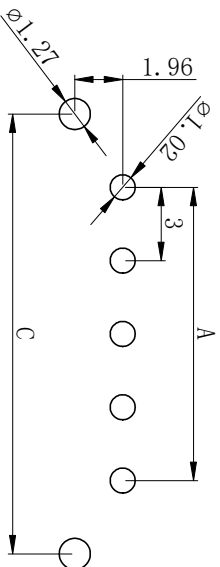

C	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0	36.0	39.0
B	9.7	12.7	15.7	18.7	21.7	24.7	27.7	30.7	33.7	36.7	39.7
A	3.0	6.0	9.0	12.0	15.0	18.0	21.0	24.0	27.0	30.0	33.0
孔数	2	3	4	5	6	7	8	9	10	11	12

技术要求Specification:

- 1、材质Material: Rubber shell:PA66 UL94V-0 PIN: H65 (Plating:NiSn)
 - 2、额定电流Current rating: 5A max
 - 3、额定电压 Voltage rating: 250V AC/DC
 - 4、温度范围 Temperature range:-25℃to+85℃
 - 5、接触电阻 Contact resistance: ≤15mΩ
 - 6、绝缘电阻 Insulation resistance: ≥1000MΩ
 - 7、耐压 Withstand voltage:1000V AC/minute
 - 8、插针的固定力 Fixing force of pins: ≥25N
 - 9、适配的插头 Adaptable plug: HX30001-P(43645-P)
 - 10、适用基板厚度 Applicable PC board thickness:1.6mm
 - 11、产品无严重损伤、缺针、长短针、旋转针等缺陷:
插针镀层无脱落、起皮、发黄等缺陷。
- The product has no defects such as serious injury, lack of needle, long needle and rotating needle.
The coating of the pin has no defects such as abscission, peeling and oxidable.

未注公差表 UNNOTED TOLERANCE TABLE			设计 DRAWN BY	王鹏程	产品名称 PRODUCT NAME		针座 WAFER
≤3	± 0.1		审核 CHECKED BY	郑建银	产品型号 PRODUCT MODEL		
≤10	± 0.2		批准 APPROVED BY	沈才义	43650-DA		
≤20	± 0.3						
≤40	± 0.4		日期 DATE	2019.08.12	红星代号 HONGXING NO		HX30001-DA
≤80	± 0.5		单位 UNIT		版次 VERSION		
视图 VIEW	比例 SCALE		页码 SHEET		浙江红星电业有限公司 Zhejiang Hongxing Electrical Co., Ltd.		
	3:1	mm	A	1/1			