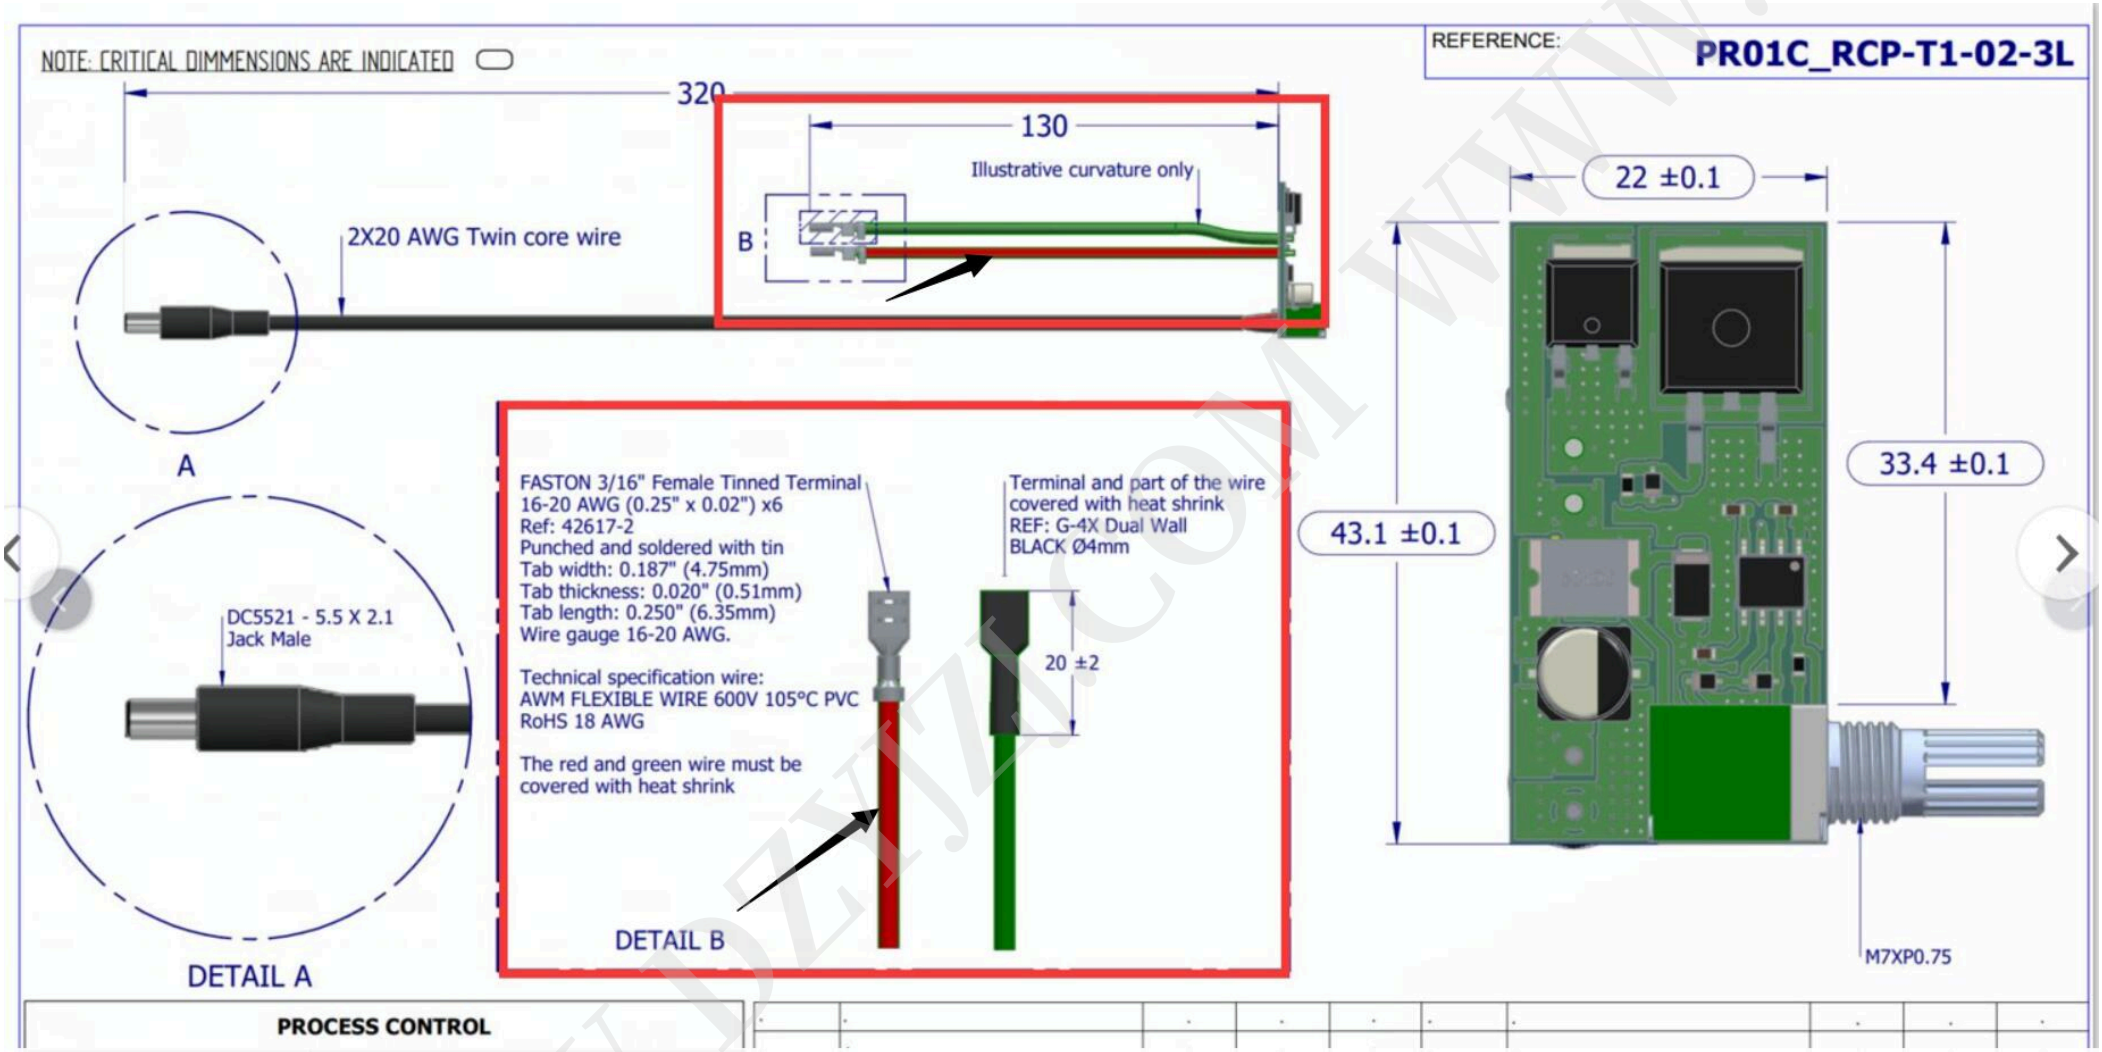

NOTE: CRITICAL DIMMENSIONS ARE INDICATED
REFERENCE:
PR01C_RCP-T1-02-3L
320
130
Illustrative curvature only
2X20 AWG Twin core wire
B
A
22 ±0.1
33.4 ±0.1
43.1 ±0.1
FASTON 3/16" Female Tinned Terminal
16-20 AWG (0.25" x 0.02") x6
Ref: 42617-2
Punched and soldered with tin
Tab width: 0.187" (4.75mm)
Tab thickness: 0.020" (0.51mm)
Tab length: 0.250" (6.35mm)
Wire gauge 16-20 AWG.
Technical specification wire:
AWM FLEXIBLE WIRE 600V 105°C PVC
RoHS 18 AWG
The red and green wire must be
covered with heat shrink
Terminal and part of the wire
covered with heat shrink
REF: G-4X Dual Wall
BLACK Ø4mm
20 ±2
DC5521 - 5.5 X 2.1
Jack Male
DETAIL A
DETAIL B
M7XP0.75
PROCESS CONTROL