
NOTE: CRITICAL DIMMENSIONS ARE INDICATED

REFERENCE: **PR01C_RCP-T1-02-3L**



A

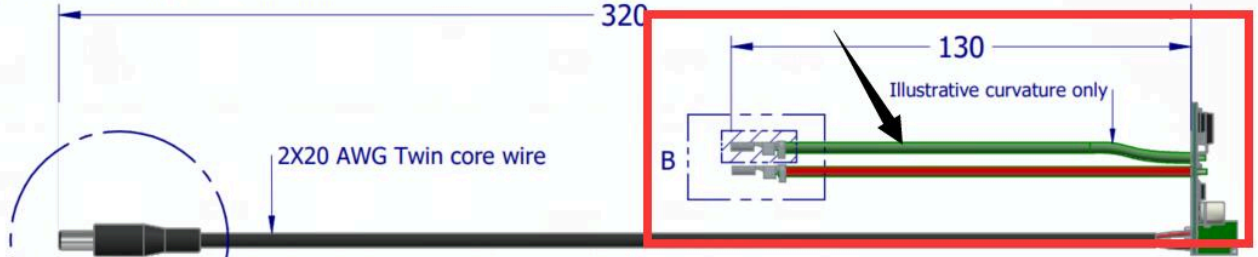


DETAIL A

FASTON 3/16" Female Tinned Terminal
16-20 AWG (0.25" x 0.02") x6
Ref: 42617-2
Punched and soldered with tin
Tab width: 0.187" (4.75mm)
Tab thickness: 0.020" (0.51mm)
Tab length: 0.250" (6.35mm)
Wire gauge 16-20 AWG.


Technical specification wire:
AWM FLEXIBLE WIRE 600V 105°C PVC
RoHS 18 AWG

The red and green wire must be covered with heat shrink

Terminal and part of the wire covered with heat shrink
REF: G-4X Dual Wall
BLACK Ø4mm

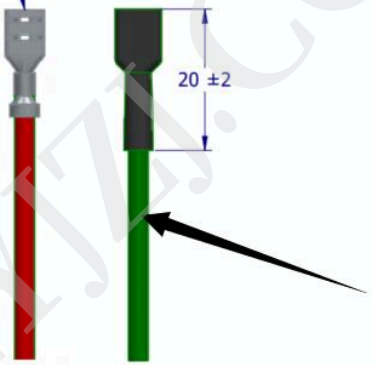

DETAIL B

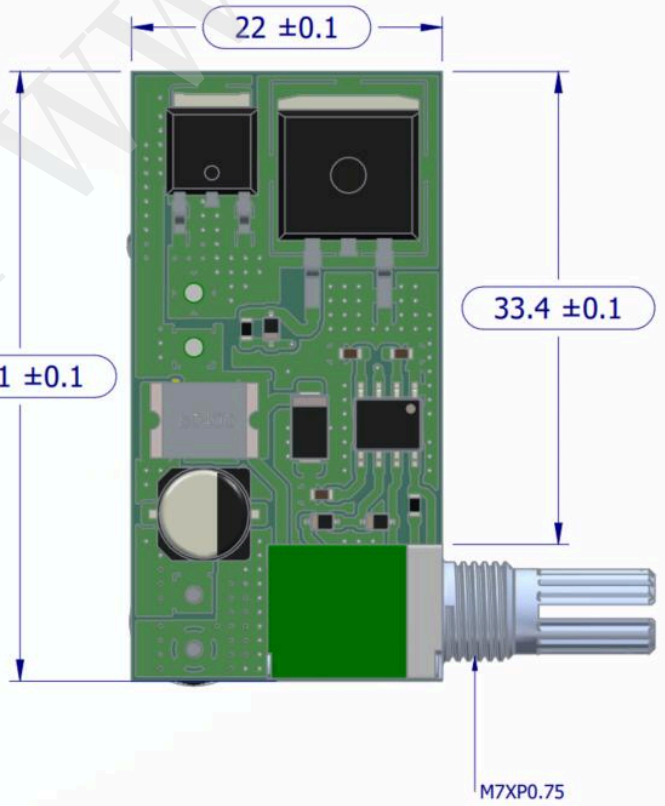

PROCESS CONTROL	
INSPECTION	**CRITERY**

FECHA:	PARTE:	DE:	A:	APROBO:	FECHA:	PARTE:	DE:	A:	APROBO:

MODIFICACIONES

WWW.DZYJZ.COM