
Item	项目		Specification 规格值
NO. of conductors	导体芯数	N	5
Pitch	间距	P	1.00±0.05
Total Pitch	全间距	PT	4.00±0.10
Total Length	总长度	L	40±2
Insulation Length	绝缘长度	IL	34±2
Margin Width	边缘宽度	M	1.00±0.05
Total Width	总宽度	W	6.00±0.20
Strip Length	线口长度	S1	3.0±1.0
Strip Length	线口长度	S2	3.0±1.0
Reinforeing tape length	补强板长度	B1	5.0±1.0
Reinforeing tape length	补强板长度	B2	5.0±1.0
Slanting	线口倾斜度	A	≤0.3
Over lap	冲孔		/
Terminal thickness	插入厚度	t1	0.32±0.02
Thickness insulation	线身厚度	t	0.12±0.03
Conductor thickness	导体厚度	Ct	0.05±0.01
Conductor width	导体宽度	Cw	0.65±0.02
Supporting Tapc Color	补强板颜色		蓝色(Blue)
PET(Supporing Tapc Color)	补强板规格		0.225mm
PET(Insulation)	绝缘胶规格		0.043mm (印字白色)
PET(Insulation)	绝缘胶规格		0.043mm (无印字白色)
Rev	版本		A

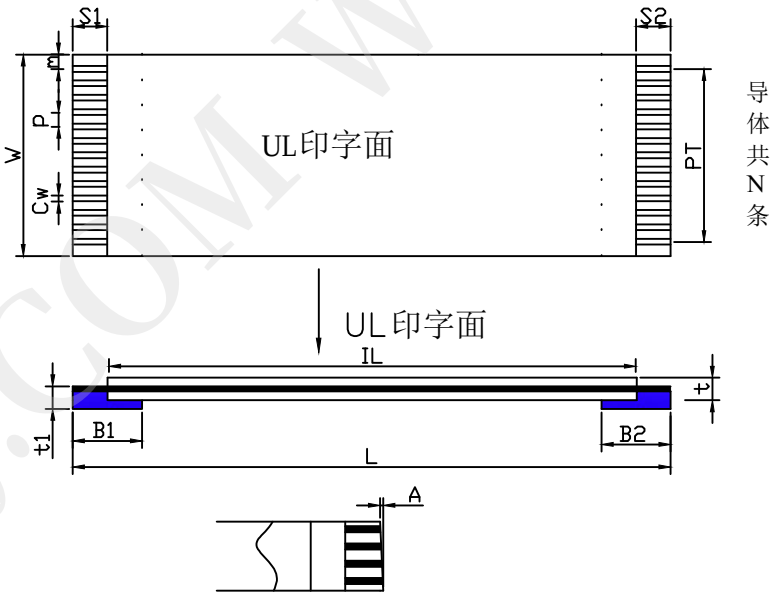

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	1.0*5*40*A (3/3/5/5)
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC-FFCX10
			MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2309131946
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM