
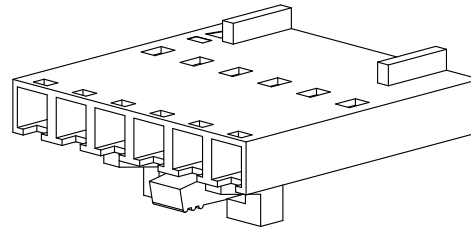


Engineer Drawing

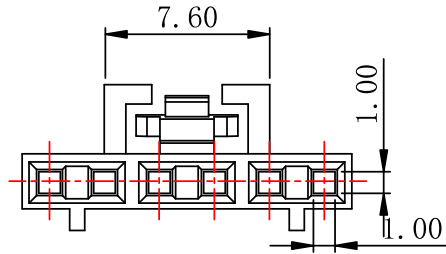

SPECIFICATIONS:

Voltage Rating:250V AC/DC

Current Rating:2.5A AC/DC

Withstanding Voltage:1000V AC/minute






Temperature Range:-25℃ To +85℃

Insulation Resistance:1000mΩ Min

Contact Resistance:20mΩ Max

Material:PA66 UL94V-0

Color:Black

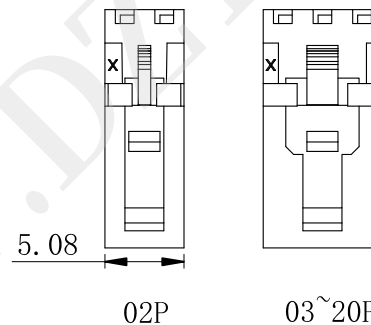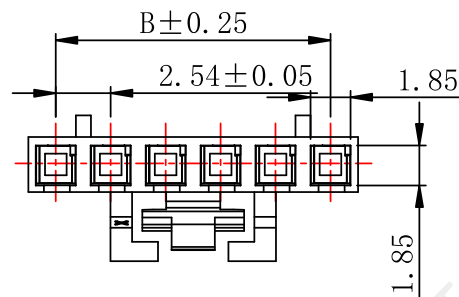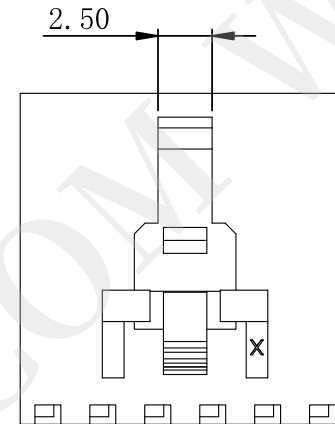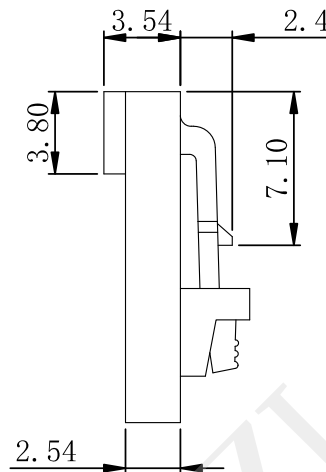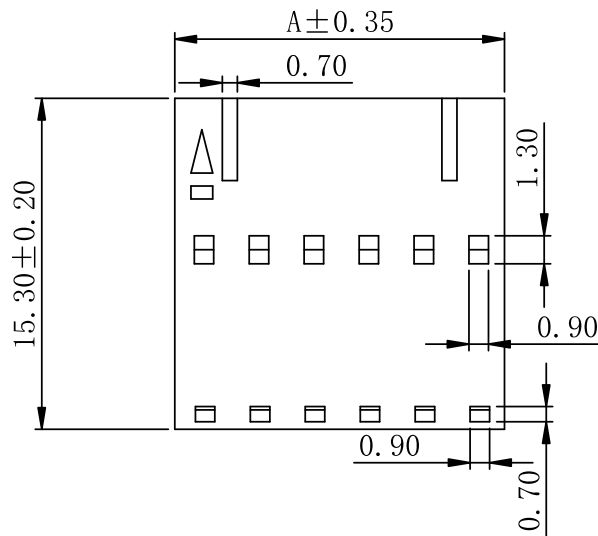

IPCW 254 H X X X X XX X

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

①Series Type

②Pitch:2.54mm

③Connector Type

④Rows Code

⑨Other Code

⑤Pin Code

⑥Material Code

⑦Colour Code

⑧Internal Code

Poles	Dimensions	
	A	B
02P	5.08	2.54
03P	7.62	5.08
04P	10.16	7.62
05P	12.70	10.16
06P	15.24	12.70
07P	17.78	15.24
08P	20.32	17.78
09P	22.86	20.32
10P	25.40	22.86
11P	27.94	25.40
12P	30.48	27.94
13P	33.02	30.48
14P	35.56	33.02
15P	38.10	35.56
16P	40.64	38.10
17P	43.10	40.64
18P	45.64	43.18
20P	50.72	48.26

GENERAL
TOLERANCES:
X.=±0.30
X.X=±0.20
X.XX=±0.10

NCP

www.i-ncp.com

PART NO:
IPCW254H1 xx 7E0

DRAWING NO
IPCW254H17E0

SHEET 1 OF 1

NAME:

2.54mm Crimp Style Connectors

UNITS:mm SCALE:1:1 REV.01