






Engineer Drawing



Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$
- Material: N-PA66 94V-2


P-PA66 94V-0

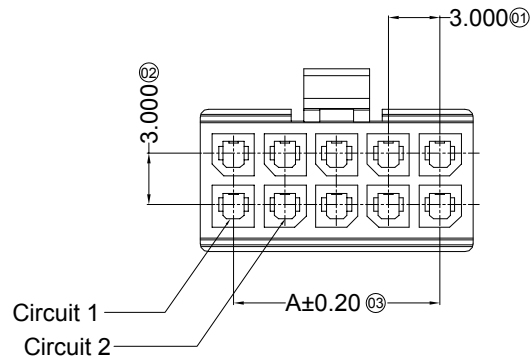

2*03P-2*12P




2*01P



2*02P

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01			2*07	18.00	21.85
2*02	3.00		2*08	21.00	24.85
2*03	6.00	9.85	2*09	24.00	27.85
2*04	9.00	12.85	2*10	27.00	30.85
2*05	12.00	15.85	2*11	30.00	33.85
2*06	15.00	18.85	2*12	33.00	36.85

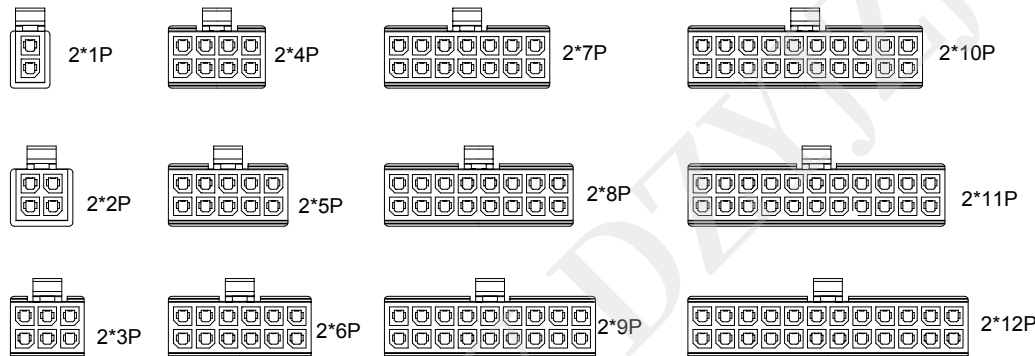

IPCW300H ** * * * *

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Type
- ② Pin code.
- ③ Material code.
- ④ Appereace code.
- ⑤ Internal code
- ⑥ Company code.
- ⑦ Other code.

TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10

UNLESS OTHERWISE SPECIFIED

NCP

www.i-ncp.com

PART NO.
IPCW300H XX

DRAWING NO.
IPCW300H

TITLE:
Pitch 3.0mm housing



SHEET 1 OF 1

UNITS mm

SCALE 1:1

REV. 01