



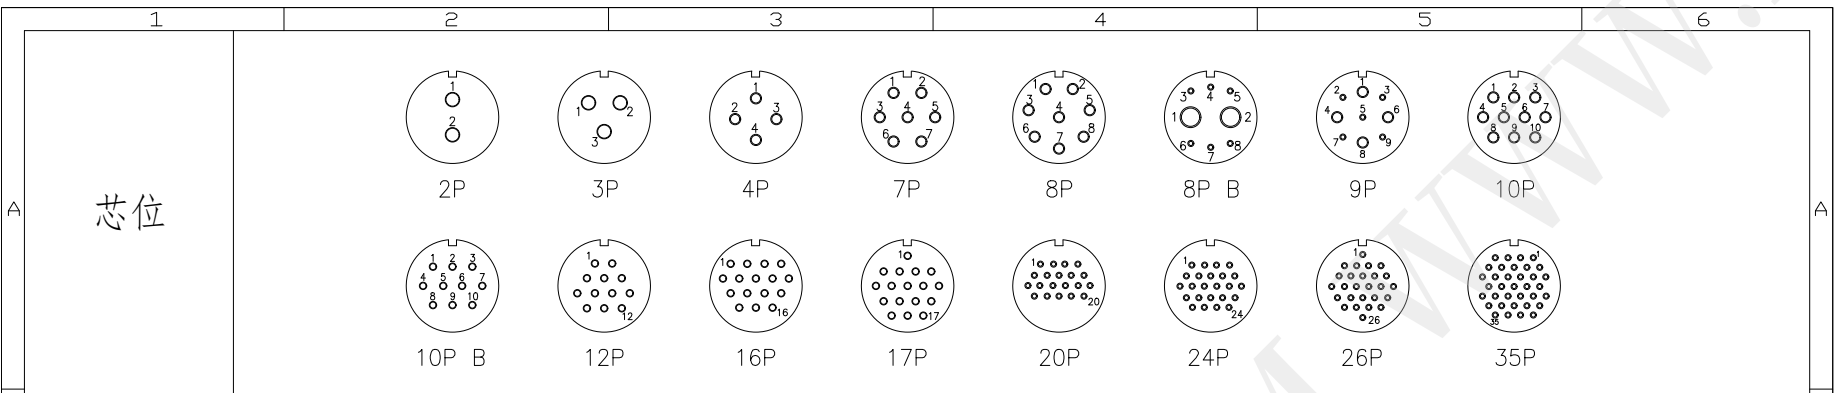

芯数	2P	3P	4P	7P	8P	8P B	9P	10P	10P B	12P	16P	17P	20P	24P	26P	35P
工作电压(V)	500	500	500	500	500	500/400	500	500	500	500	500	500	400	400	400	400
额定电流(A)	50	50	25	25	25	60/5	25/5	25	10	10	10	10	5	5	5	5
耐压(V)	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1500	1200	1200	1200	1200
接触电阻 (mΩ)	0.5	0.5	1	1	1	5/0.5	1/5	1	2.5	2.5	2.5	2.5	5	5	5	5

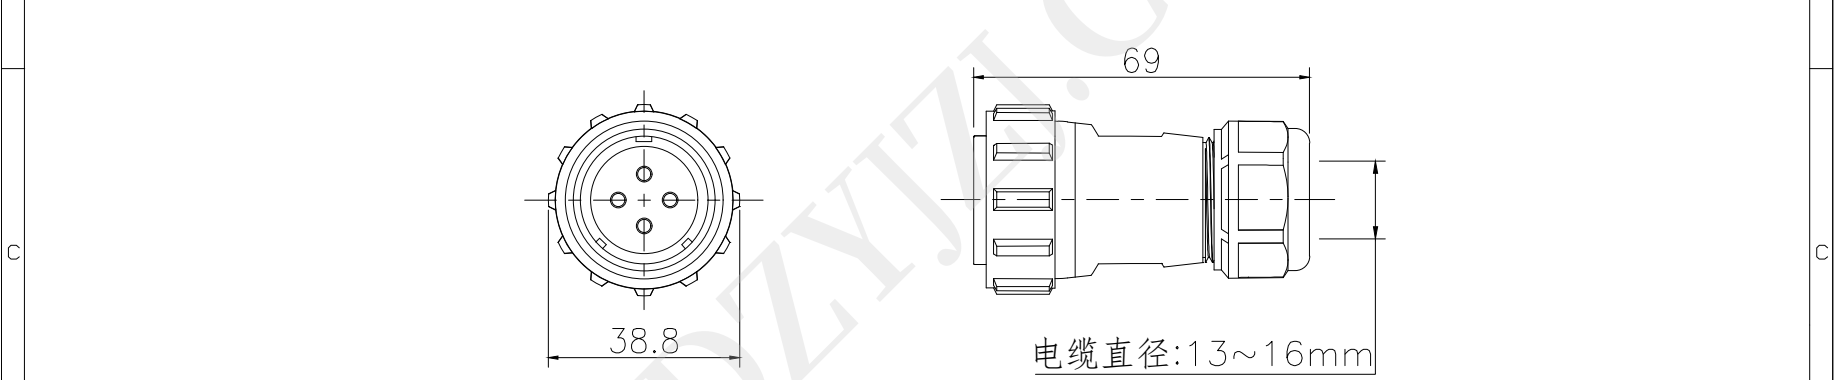

材料和技术参数		GENERAL TOLERANCE (UNLESS SPECIFIED)		DWN DATE		TITLE
接插方式:	螺纹锁紧	≤10	±0.1	L.L	2022.10.10	
外壳材料:	热塑性塑料PC, PA66 防火等级: V-0	<10~≤20	±0.2	CHK	DATE	JH2810S 塑料组装式孔型插头
绝缘体:	热塑性塑料PPS, 耐高温260° C	<20~≤50	±0.5	APVD	DATE	
接触件材料:	铜, 镀金	Angle	±1°	UNIT REV		PART NO
接线方式:	焊接, 螺丝压接			MM	A	
电缆直径:	13~16 mm			SIZE	SHEET	DRAWING NO
防护等级:	IP68	THIRD ANGLE		A4	1 OF 1	
接插次数:	500					
温度范围:	-40°C ~ +85°C					
绝缘电阻:	2000 MΩ					