
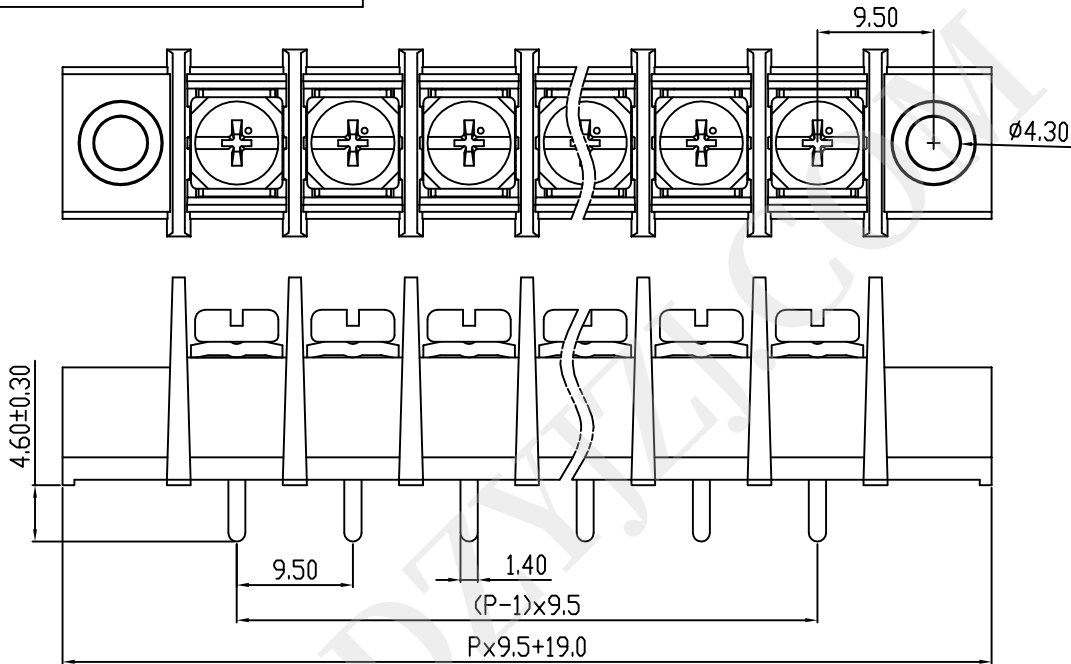


linear dimension(Tolerances Standard GB/T 14486-2008)								—  		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

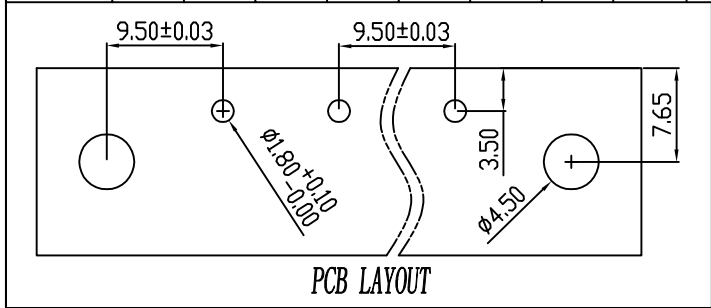

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.10.12

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group	B	C	D			
额定电压	Rated Voltage	[V]	300	-	-		
额定电流	Rated Current	[A]	20	-	-		
接线范围	Wire Range	22-12					
单/多芯线	Solid/Stranded						[AWG]
IEC 技术参数							
IEC Technical Data							
额定电压	Rated Voltage	[V]	750				
额定电流	Rated Current	[A]	32				
耐电压	Withstanding Voltage	[V/1Min]	3000V/1Min				
导线截面积	Conductor cross section	4.0					
硬质/柔性导线	Solid/ flexible						[mm ²]
材料 Material							
绝缘材料	Insulation Material	PA66					
阻燃等级	Imflamability	UL94V-0					
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Tin Plated					
一般参数 Other Data							
间距 Pitch	[mm]	9.5					
极数 Poles	[P]	02~24					
剥线长度 Stripping Length	[mm]	-					
螺丝 Screw/扭矩 Torque(Max)	[N.m]	M4/1.0					
工作温度 Operating temperatur	[°C]	-40~+105					
引针尺寸 Pin Dimensions	[mm]	4.6					
PCB板孔径 PCB Hole Diameter	[mm]	1.8					

DES.	LQQ	DATE	21.10.12	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	BY	DATE	21.10.12	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD									
APP.	CLF	DATE	21.10.12							名称 / TITLE	KF45SM-9.5		