

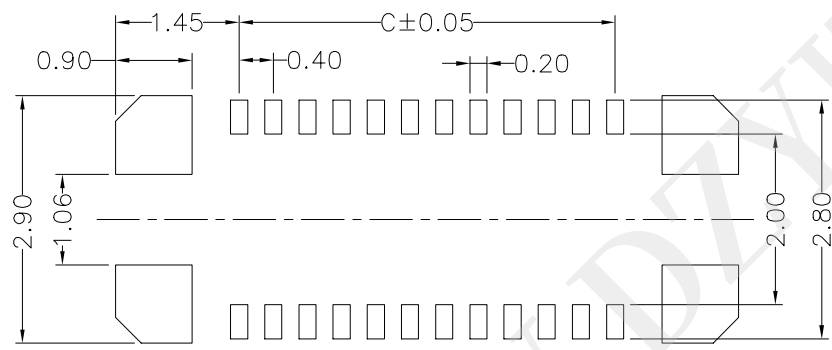
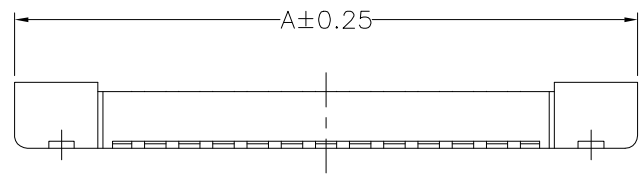
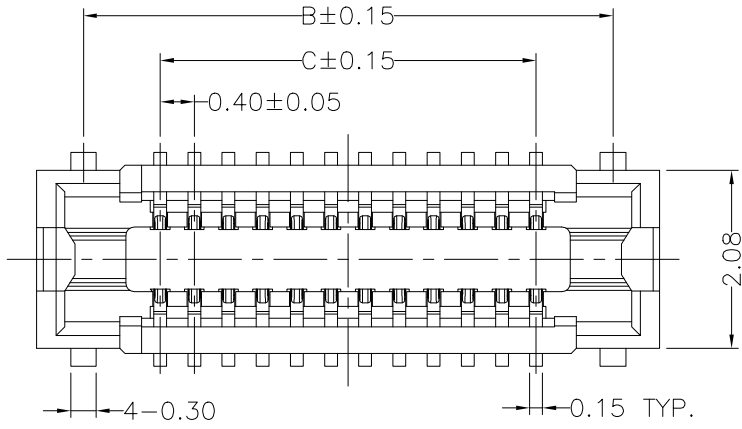


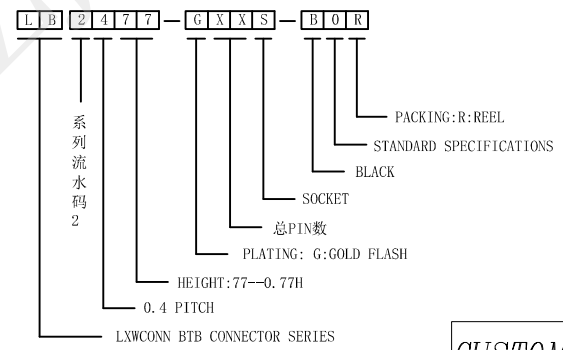

RECOMMENDED PCB LAYOUT
CONNECTOR SIDE



SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
 - 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
 - 3.INSULATION RESISTANCE: 50M Ω MIN;
 - 4.CONTACT RESISTANCE: 100m Ω MAX;
 - 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.
- MATERIAL:
- 1.INSULATOR: LCP UL 94V-0 BLACK;
 - 2.TERMINAL: COPPER ALLOY;
 - 3.METAL FITTINGS: COPPER ALLOY.
- PLATING:
- 1.TERMINAL: GOLD PLATING, NICKEL 50u" MIN. OVER ALL;
 - 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

PIN NO.	A	B	C
10	4.50	3.40	1.60
12	4.90	3.80	2.00
16	5.70	4.60	2.80
20	6.50	5.40	3.60
24	7.30	6.20	4.40
30	8.50	7.40	5.60
34	9.30	8.20	6.40
40	10.50	9.40	7.60
50	12.50	11.40	9.60



修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
-----------	------------------------------	-----------------	------------

CUSTOMER		LXW 连兴旺电子(深圳)有限公司 LXWCONN ELECTRONICS (SHENZHEN) CO., LTD				
一般公差 GENERAL TOLERANCE X ±0.25 .XX ±0.20 XXX ±0.10 ANGLES ±1°		制图 (DR): Kavin 2018.06.07	品名(TITLE): BTB P0.40 SOCKET			
审核 (CHRD):		料号(PART NO): LB2477-GXXS-B0R				
版本 (REV) A		核准 (APPD):	比例(SCALE) 1:8	单位(UNITS) mm	张数(SHEET) 1 OF 1	图幅(SIZE) A4