

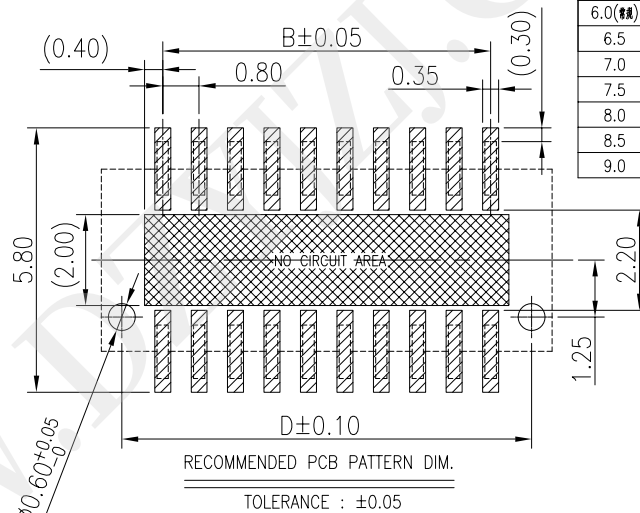
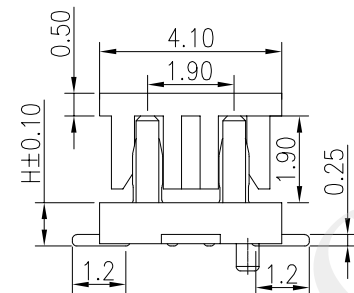
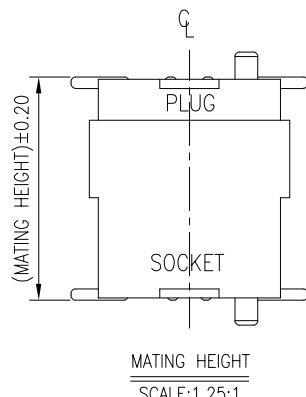
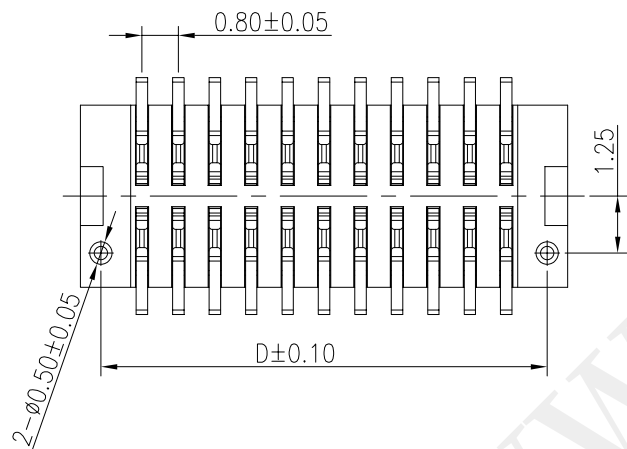
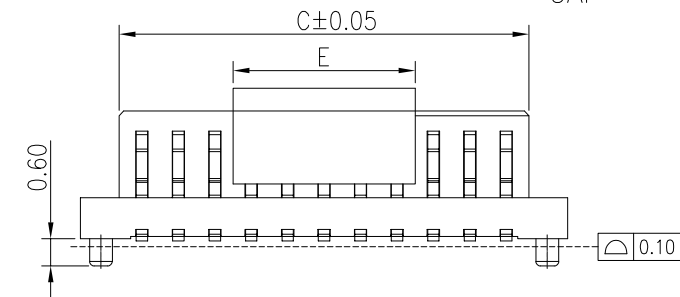


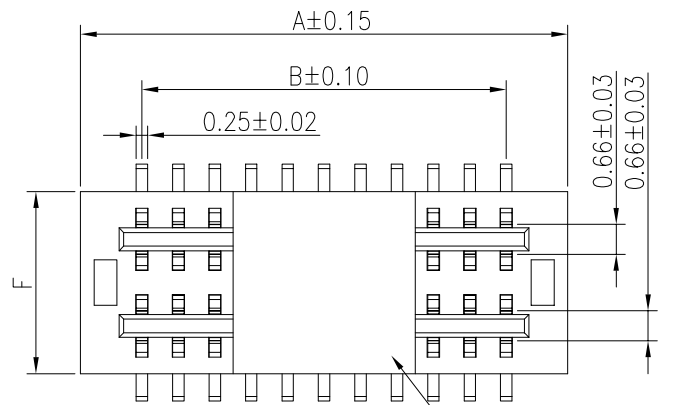

NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:BRASS
PLATING:1μ" GOLD FLASH OVERALL 50~100μ"NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB3xx-GxxP-BxR

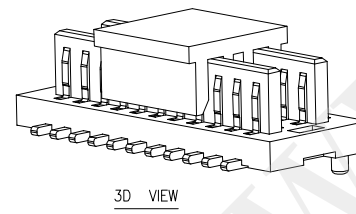

PACKING: R: CARRIER REEL
0:STANDARD SPECIFICATIONS
1:WITH POSITIONING POSTS
2:WITHOUT POSITIONING POSTS
COLOR:BLACK
PLUG
PIN
PLATING: G:GOLD FLASH
0.8 BTB HEIGHT: 10--1.0H;20--2.0H;
40--4.0H;
LXWCONN BTB CONNECTOR SERIES

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	PLUG (F.)	NO.of contacts	Dimensions					NO.of contacts	Dimensions				
					A.	B.	C.	D.	E.		A.	B.	C.	D.	E.
4.0	1.0	3.0	4.0	8	5.10	2.40	3.46	4.20	4.00	58	25.10	22.40	23.46	24.20	8.00
4.5	1.0	3.5		10	5.90	3.20	4.26	5.00		60	25.90	23.20	24.26	25.00	
5.0	1.0	4.0		12	6.70	4.00	5.06	5.80		62	26.70	24.00	25.06	25.80	
5.5	1.0	4.5		14	7.50	4.80	5.86	6.60		64	27.50	24.80	25.86	26.60	
6.0	1.0	5.0		16	8.30	5.60	6.66	7.40		66	28.30	25.60	26.66	27.40	
6.5	2.0	4.5		18	9.10	6.40	7.46	8.20		68	29.10	26.40	27.46	28.20	
7.0	4.0	3.0		20	9.90	7.20	8.26	9.00		70	29.90	27.20	28.26	29.00	
7.5	4.0	3.5		22	10.70	8.00	9.06	9.80		72	30.70	28.00	29.06	29.80	
8.0	4.0	4.0		24	11.50	8.80	9.86	10.60		74	31.50	28.80	29.86	30.60	
8.5	4.0	4.5		26	12.30	9.60	10.66	11.40		76	32.30	29.60	30.66	31.40	
9.0	4.0	5.0	4.4	28	13.10	10.40	11.46	12.20	8.00	78	33.10	30.40	31.46	32.20	8.00
				30	13.90	11.20	12.26	13.00		80	33.90	31.20	32.26	33.00	
				32	14.70	12.00	13.06	13.80		82	34.70	32.00	33.06	33.80	
				34	15.50	12.80	13.86	14.60		84	35.50	32.80	33.86	34.60	
				36	16.30	13.60	14.66	15.40		86	36.30	33.60	34.66	35.40	
				38	17.10	14.40	15.46	16.20		88	37.10	34.40	35.46	36.20	
				40	17.90	15.20	16.26	17.00		90	37.90	35.20	36.26	37.00	
				42	18.70	16.00	17.06	17.80		92	38.70	36.00	37.06	37.80	
				44	19.50	16.80	17.86	18.60		94	39.50	36.80	37.86	38.60	
				46	20.30	17.60	18.66	19.40		96	40.30	37.60	38.66	39.40	
				48	21.10	18.40	19.46	20.20		98	41.10	38.40	39.46	40.20	
				50	21.90	19.20	20.26	21.00		100	41.90	39.20	40.26	41.00	
				54	23.50	20.80	21.86	22.60							
				56	24.30	21.60	22.66	23.40							

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD


制图 (OR): Kevin 2016.07.05 品名(TITLE): 0.8mm 双槽BTB PLUG
审核 (CHKD): 料号(PART NO): LB3XX-GxxP-BxR
比例(SCALE) 单位(UNITS) 张数(SHEET) 图幅(SIZE)
核准 (APPD): 1:8 mm 1 OF 1 A4

RoHS
Compliant
2013/95/EC




修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE


一般公差 GENERAL TOLERANCE
.X ±0.20
.XX ±0.15
.XXX ±0.06
ANGLES ±0° 30'

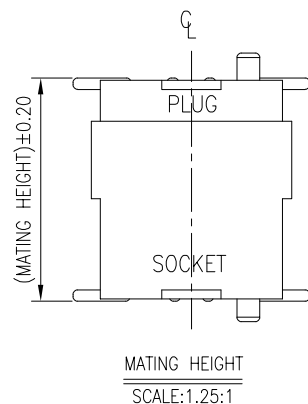

INFECTOR SERIES

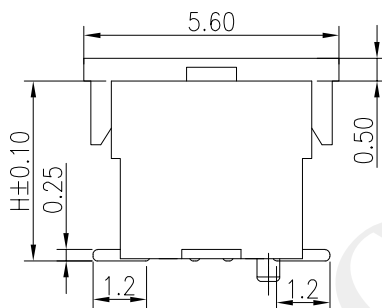

Technical drawing of a 2x10 grid of pins. The drawing shows two rows of ten pins each, mounted on a rectangular base. The pins are arranged in a regular grid. Dimensions are indicated: the distance between the centers of adjacent pins in a row is 0.80 ± 0.05 ; the total width of the grid is $D \pm 0.10$; and the height of the pins is 1.25 . A circular feature with a crosshair is shown on the left side of the base, and a similar feature is on the right side. A small circular feature with a crosshair is also shown on the left side of the base, with a dimension line indicating its position relative to the grid.

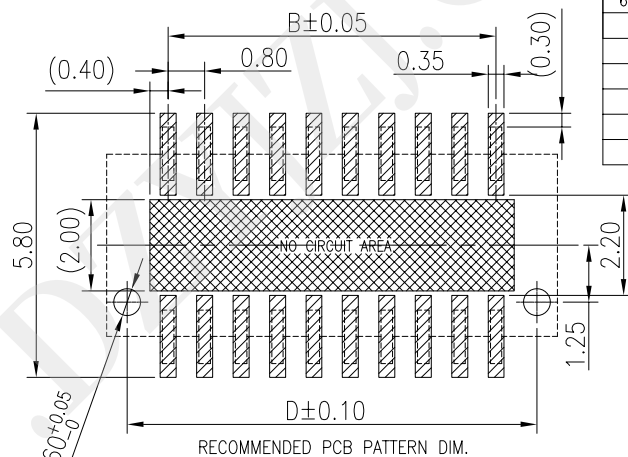

TOLERANCE : ± 0.05

TONG	比例 (SCALE)	单位 (UNITS)	张数 (SHEET)	图幅 (SIZE)
核准 (APPD): 2023.05.04	1:8	mm	1 OF 1	A4

版本 (REV)	C	
-------------	---	---

⑧	定位柱 0.60改为0.50	TONG	2023.05.04
修订 SPR	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE

**RoHS
Compliant**
2013/95/EC

