

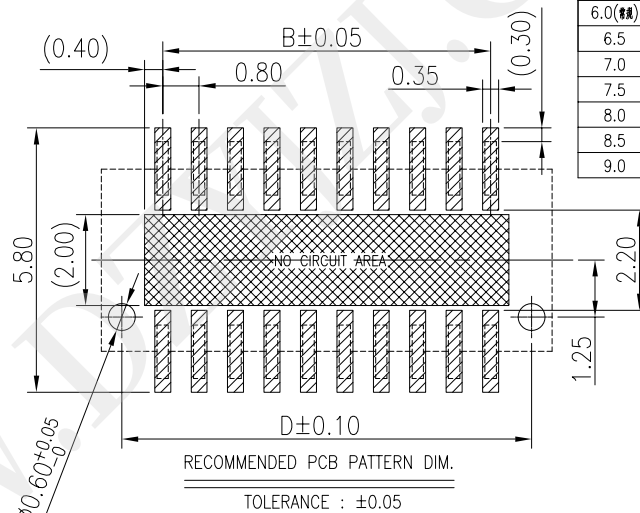
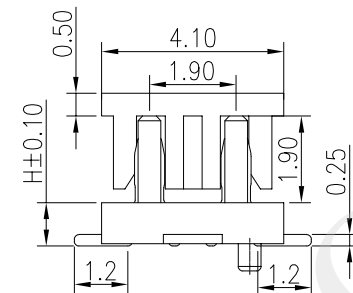
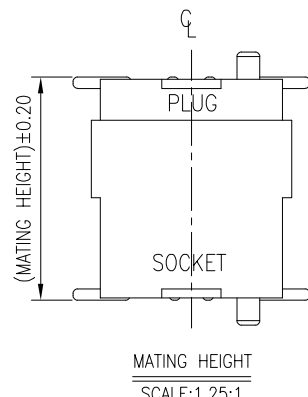
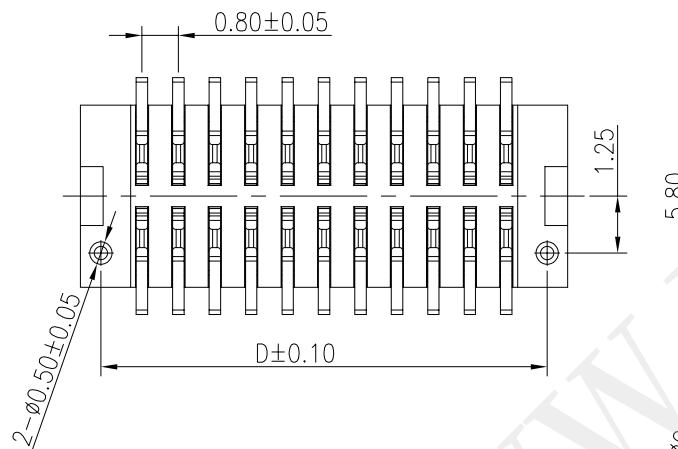
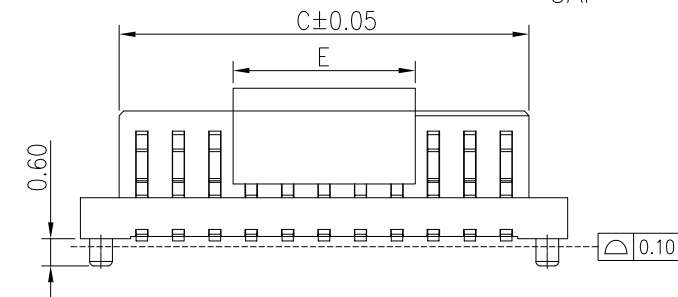


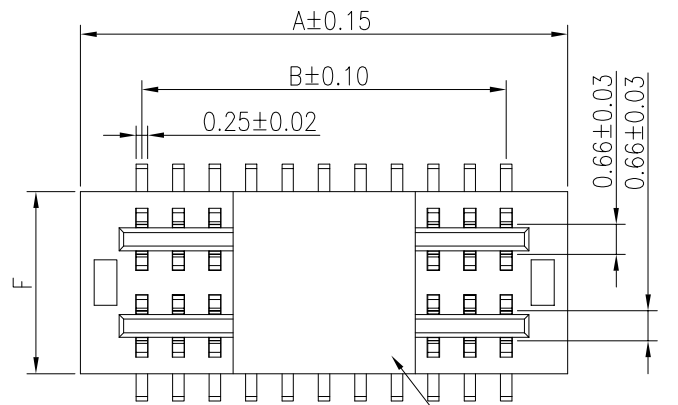

NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:BRASS
PLATING:1μ" GOLD FLASH OVERALL 50~100μ"NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB3xx-GxxP-BxR

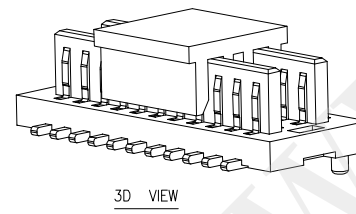

PACKING: R: CARRIER REEL
0:STANDARD SPECIFICATIONS
1:WITH POSITIONING POSTS
2:WITHOUT POSITIONING POSTS
COLOR:BLACK
PLUG
PIN
PLATING: G:GOLD FLASH
0.8 BTB HEIGHT: 10--1.0H; 20--2.0H;
40--4.0H;
LXWCONN BTB CONNECTOR SERIES

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	PLUG (F.)	NO.of contacts	Dimensions					NO.of contacts	Dimensions				
					A.	B.	C.	D.	E.		A.	B.	C.	D.	E.
4.0	1.0	3.0	4.0	8	5.10	2.40	3.46	4.20	4.00	58	25.10	22.40	23.46	24.20	8.00
4.5	1.0	3.5		10	5.90	3.20	4.26	5.00		60	25.90	23.20	24.26	25.00	
5.0	1.0	4.0		12	6.70	4.00	5.06	5.80		62	26.70	24.00	25.06	25.80	
5.5	1.0	4.5		14	7.50	4.80	5.86	6.60		64	27.50	24.80	25.86	26.60	
6.0	1.0	5.0		16	8.30	5.60	6.66	7.40		66	28.30	25.60	26.66	27.40	
6.5	2.0	4.5		18	9.10	6.40	7.46	8.20		68	29.10	26.40	27.46	28.20	
7.0	4.0	3.0		20	9.90	7.20	8.26	9.00		70	29.90	27.20	28.26	29.00	
7.5	4.0	3.5		22	10.70	8.00	9.06	9.80		72	30.70	28.00	29.06	29.80	
8.0	4.0	4.0		24	11.50	8.80	9.86	10.60		74	31.50	28.80	29.86	30.60	
8.5	4.0	4.5		26	12.30	9.60	10.66	11.40		76	32.30	29.60	30.66	31.40	
9.0	4.0	5.0	4.4	28	13.10	10.40	11.46	12.20	8.00	78	33.10	30.40	31.46	32.20	8.00
				30	13.90	11.20	12.26	13.00		80	33.90	31.20	32.26	33.00	
				32	14.70	12.00	13.06	13.80		82	34.70	32.00	33.06	33.80	
				34	15.50	12.80	13.86	14.60		84	35.50	32.80	33.86	34.60	
				36	16.30	13.60	14.66	15.40		86	36.30	33.60	34.66	35.40	
				38	17.10	14.40	15.46	16.20		88	37.10	34.40	35.46	36.20	
				40	17.90	15.20	16.26	17.00		90	37.90	35.20	36.26	37.00	
				42	18.70	16.00	17.06	17.80		92	38.70	36.00	37.06	37.80	
				44	19.50	16.80	17.86	18.60		94	39.50	36.80	37.86	38.60	
				46	20.30	17.60	18.66	19.40		96	40.30	37.60	38.66	39.40	
				48	21.10	18.40	19.46	20.20		98	41.10	38.40	39.46	40.20	
				50	21.90	19.20	20.26	21.00		100	41.90	39.20	40.26	41.00	
				54	23.50	20.80	21.86	22.60							
				56	24.30	21.60	22.66	23.40							

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD


制图 (OR): Kevin 2016.07.05 品名(TITLE): 0.8mm 双槽BTB PLUG
审核 (CHKD): 料号(PART NO): LB3XX-GxxP-BxR
比例(SCALE): 1:8 单位(UNITS): mm 张数(SHEET): 1 OF 1 图幅(SIZE): A4
核准 (APPD):

RoHS
Compliant
2013/95/EC




修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE

一般公差 GENERAL TOLERANCE
.X ±0.20
.XX ±0.15
.XXX ±0.06
ANGLES ±0° 30'

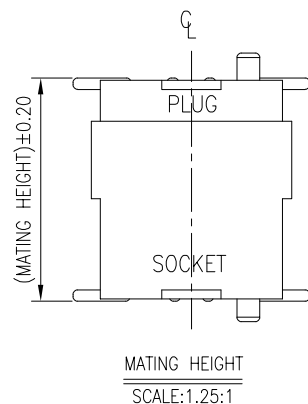

/CONN BTB CONNECTOR SERIES

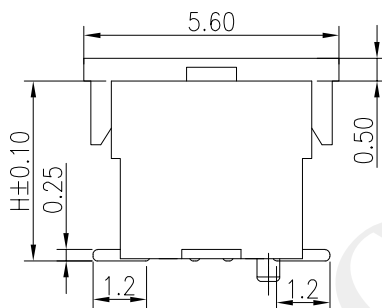

比例 (SCALE)	单位 (UNITS)	张数 (SHEET)	图幅 (SIZE)
1:8	mm	1 OF 1	A4