

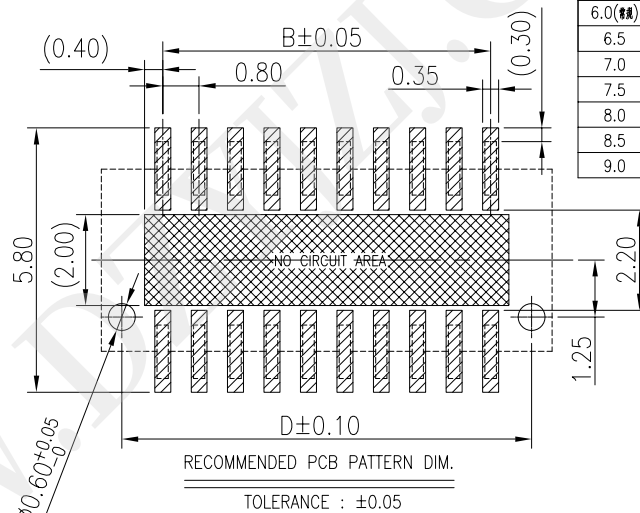
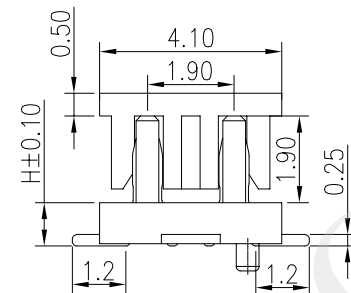
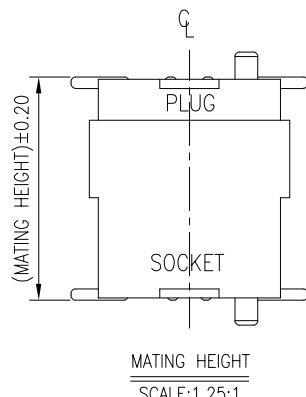
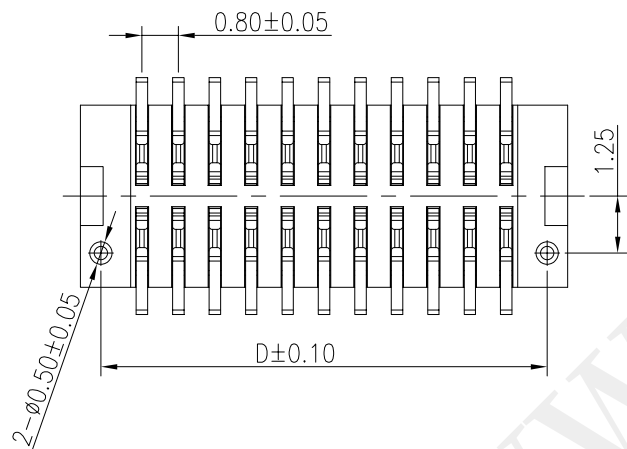
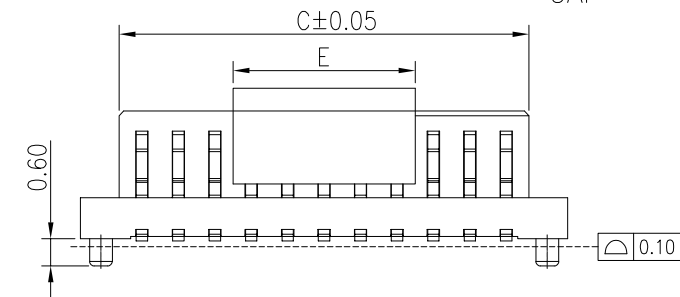


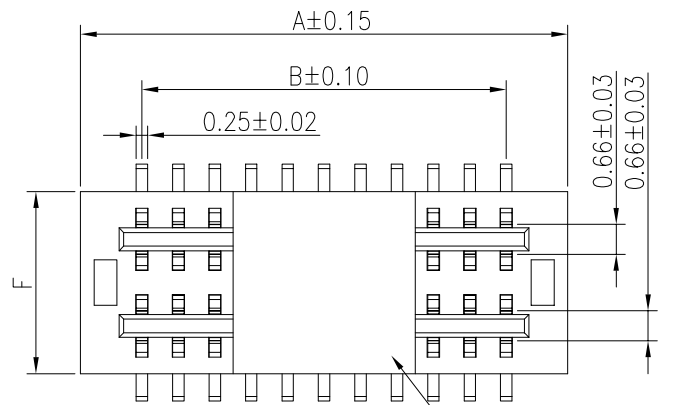

NOTES:

- 1.HUOSING: PA9T HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 2.TERMINAL:BRASS
PLATING:1μ" GOLD FLASH OVERALL 50~100μ" NICKEL UNDER PLATED.
- 3.CODING INFORMATION: LB3xx-GxxP-BxR

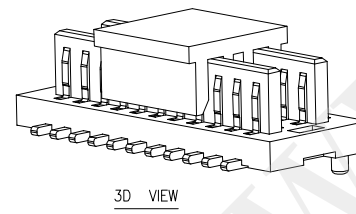

- PACKING: R: CARRIER REEL
0:STANDARD SPECIFICATIONS
1:WITH POSITIONING POSTS
2:WITHOUT POSITIONING POSTS
COLOR:BLACK
PLUG
PIN
PLATING: G:GOLD FLASH
0.8 BTB HEIGHT: 10--1.0H;20--2.0H;
40--4.0H;
LXWCONN BTB CONNECTOR SERIES

MATING HEIGHT	PLUG (H.)	SOCKET (H.)	PLUG (F.)	NO.of contacts	Dimensions					NO.of contacts	Dimensions				
					A.	B.	C.	D.	E.		A.	B.	C.	D.	E.
4.0	1.0	3.0	4.0	8	5.10	2.40	3.46	4.20	4.00	58	25.10	22.40	23.46	24.20	8.00
4.5	1.0	3.5		10	5.90	3.20	4.26	5.00		60	25.90	23.20	24.26	25.00	
5.0	1.0	4.0		12	6.70	4.00	5.06	5.80		62	26.70	24.00	25.06	25.80	
5.5	1.0	4.5		14	7.50	4.80	5.86	6.60		64	27.50	24.80	25.86	26.60	
6.0	1.0	5.0		16	8.30	5.60	6.66	7.40		66	28.30	25.60	26.66	27.40	
6.5	2.0	4.5		18	9.10	6.40	7.46	8.20		68	29.10	26.40	27.46	28.20	
7.0	4.0	3.0		20	9.90	7.20	8.26	9.00		70	29.90	27.20	28.26	29.00	
7.5	4.0	3.5		22	10.70	8.00	9.06	9.80		72	30.70	28.00	29.06	29.80	
8.0	4.0	4.0		24	11.50	8.80	9.86	10.60		74	31.50	28.80	29.86	30.60	
8.5	4.0	4.5		26	12.30	9.60	10.66	11.40		76	32.30	29.60	30.66	31.40	
9.0	4.0	5.0	4.4	28	13.10	10.40	11.46	12.20	8.00	78	33.10	30.40	31.46	32.20	8.00
				30	13.90	11.20	12.26	13.00		80	33.90	31.20	32.26	33.00	
				32	14.70	12.00	13.06	13.80		82	34.70	32.00	33.06	33.80	
				34	15.50	12.80	13.86	14.60		84	35.50	32.80	33.86	34.60	
				36	16.30	13.60	14.66	15.40		86	36.30	33.60	34.66	35.40	
				38	17.10	14.40	15.46	16.20		88	37.10	34.40	35.46	36.20	
				40	17.90	15.20	16.26	17.00		90	37.90	35.20	36.26	37.00	
				42	18.70	16.00	17.06	17.80		92	38.70	36.00	37.06	37.80	
				44	19.50	16.80	17.86	18.60		94	39.50	36.80	37.86	38.60	
				46	20.30	17.60	18.66	19.40		96	40.30	37.60	38.66	39.40	
				48	21.10	18.40	19.46	20.20		98	41.10	38.40	39.46	40.20	
				50	21.90	19.20	20.26	21.00		100	41.90	39.20	40.26	41.00	
				54	23.50	20.80	21.86	22.60							
				56	24.30	21.60	22.66	23.40							

LXW 连兴旺电子(深圳)有限公司
connectivity LXWCONN ELECTRONICS (SHENZHEN) CO., LTD


制图 (OR): Kevin 2016.07.05 品名(TITLE): 0.8mm 双槽BTB PLUG
审核 (CHKD): 料号(PART NO): LB3XX-GxxP-BxR
比例(SCALE) 单位(UNITS) 张数(SHEET) 图幅(SIZE)
核准 (APPD): 1:8 mm 1 OF 1 A4

RoHS
Compliant
2013/95/EC




修订 SER	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE


一般公差 GENERAL TOLERANCE
.X ±0.20
.XX ±0.15
.XXX ±0.06
ANGLES ±0° 30'

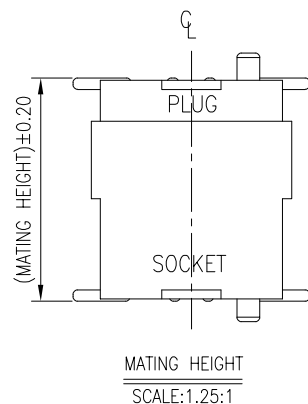

INFECTOR SERIES

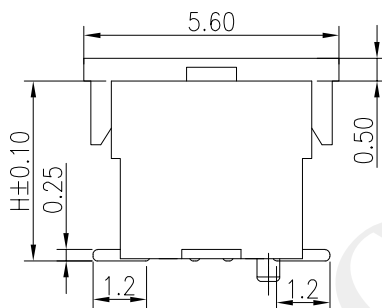

Technical drawing of a 2x12 grid of pins. The drawing shows two rows of 12 pins each, with a total width of $D \pm 0.10$ and a height of 1.25 . The distance between the centers of adjacent pins in a row is 0.80 ± 0.05 . The pins are shown in cross-section, with a central hole and a surrounding shell. A circular feature with a crosshair is located at the bottom left corner of the grid.

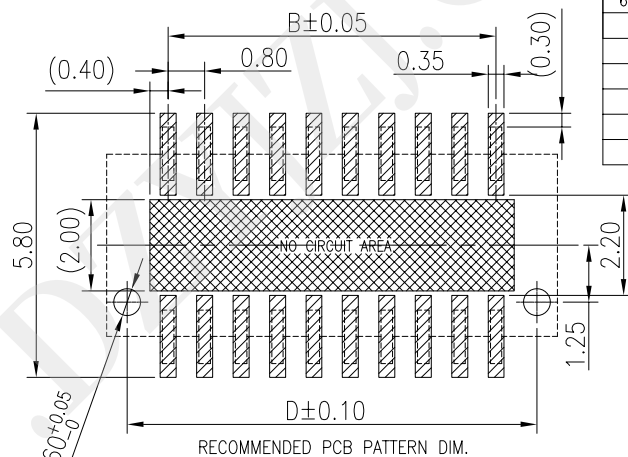

TOLERANCE : ± 0.05

TONG	比例 (SCALE)	单位 (UNITS)	张数 (SHEET)	图幅 (SIZE)
核准 (APPD): 2023.05.04	1:8	mm	1 OF 1	A4

版本 (REV)	C	
-------------	---	---

⑧	定位柱 0.60改为0.50	TONG	2023.05.04
修订 SPR	修 改 摘 要 REVISION DESCRIPTION	签 名 SIGNATURE	日期 DATE