


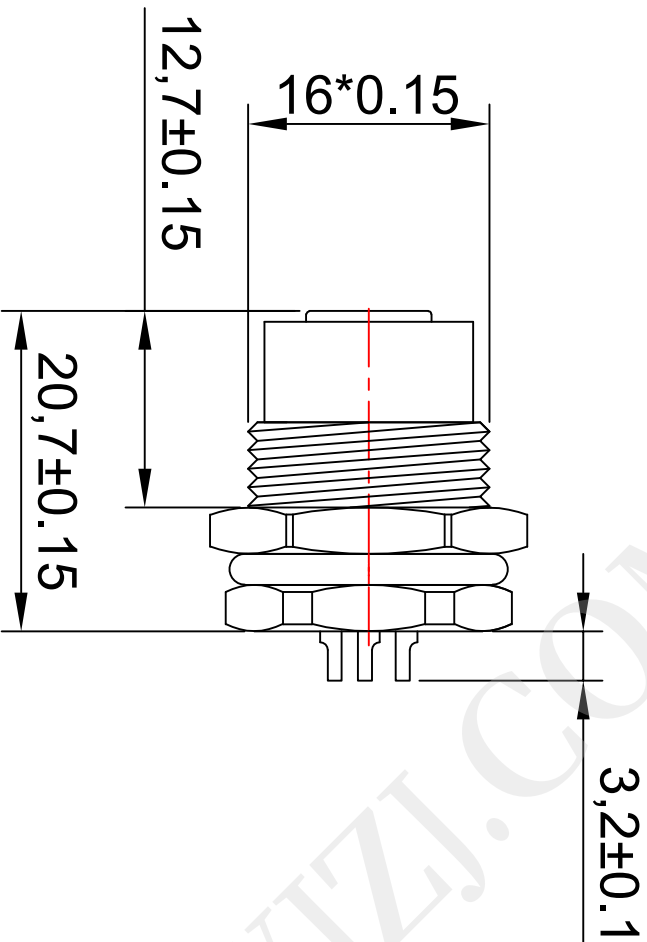

| 芯数<br>Pin | 额定电流<br>Rate Current | 额定电压<br>Rate Voltage | 耐压<br>Dielectric Withstanding Voltage |
|-----------|----------------------|----------------------|---------------------------------------|
| 4         | 4A                   | 250V                 | 1500 V/Min                            |
| 5         | 4A                   | 250V                 | 1200 V/Min                            |
| 8         | 2A                   | 30V                  | 500 V/Min                             |
| 12        | 1A                   | 30V                  | 500 V/Min                             |


|       |                       |     |          |
|-------|-----------------------|-----|----------|
| 绘图:   | MAXIA                 | 日期: | 20211027 |
| 审核:   | 张海娜                   | 日期: | 20211027 |
| 版本编号: | ZRLCGY2021-10-20-CJ/1 |     |          |

|                                        |                   |                        |  |
|----------------------------------------|-------------------|------------------------|--|
| 上海洲日电子有限公司                             |                   |                        |  |
| Shanghai Zhouri Electronics CO.,LTD    |                   |                        |  |
| 上海康司玛电子进出口有限公司                         |                   |                        |  |
| Shanghai KangSima Electronic Equipment |                   |                        |  |
| Import and export Co.,LTD              |                   |                        |  |
| tel:021-51571121                       |                   | http://www.zhour.i.net |  |
| fax:021-51571120                       |                   |                        |  |
| 产品名称:                                  | M12-A-XP-F-BQ1-HX |                        |  |

材料Material  
胶芯原料Insulator:PA46,(UL 94V-0)  
外壳材料Related Material: Brass  
表面涂层Surface Coating:Nickel Plating  
针材料Related Material: Male-Brass  
Female-Bronze  
表面涂层Surface Coating:Overgold 1u  
规格参数Planning Parameters  
绝缘电阻Insulation Resistance:≥100MΩ  
工作温度Operating Temperature:-40+150°

M12-A-XP-F-BQ1-HX

HX-面板杯口焊线式  
HB-面板PCB焊板式  
BQ1-面板前锁  
BQ3-面板长螺纹前锁  
BH1-面板后锁  
M-公端 F-母端  
XP-4P 5P 8P 12P  
A-编码



单位: mm

比例:

图幅:A4

页次 共 01 第 01