


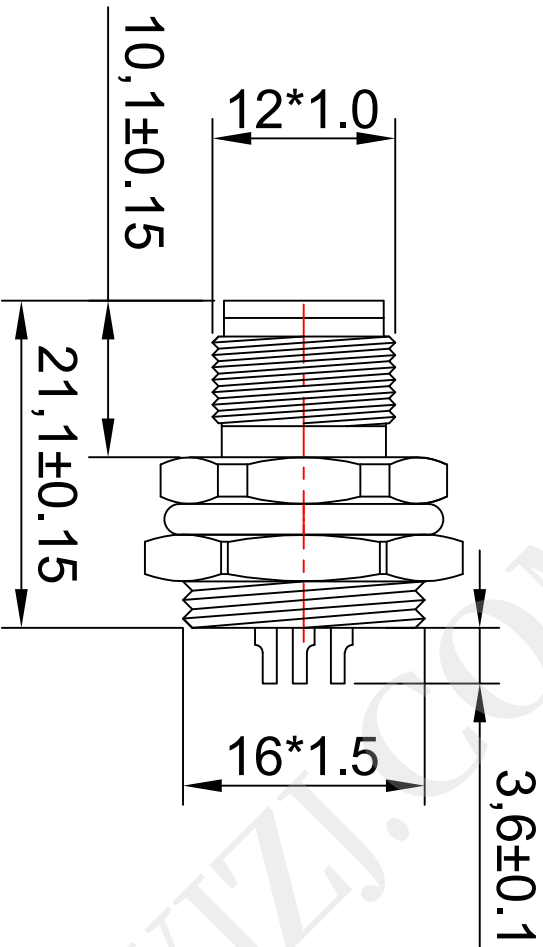

材料Material
胶芯原料Insulator:PA46,(UL 94V-0)
外壳材料Related Material: Brass
表面涂层Surface Coating:Nickel Plating
针材料Related Material: Male-Brass
Female-Bronze
表面涂层Surface Coating:Overgold 1u
规格参数Planning Parameters
绝缘电阻Insulation Resistance:≥100MΩ
工作温度Operating Temperature:-40+150°

M12-A-XP-M-BQ1-HX

HX-面板杯口焊线式
HB-面板PCB焊板式
BQ1-面板前锁
BQ3-面板长螺纹前锁
BH1-面板后锁
M-公端 F-母端
XP-4P 5P 8P 12P
A-编码

芯数 Pin	额定电流 Rate Current	额定电压 Rate Voltage	耐压 Dielectric Withstanding Voltage
4	4A	250V	1500 V/Min
5	4A	250V	1200 V/Min
8	2A	30V	500 V/Min
12	1A	30V	500 V/Min

绘图:	MAXIA	日期:	20211027
审核:	张海娜	日期:	20211027
版本编号: ZRLCGY2021-10-20-CJ/1			
第三视角:		单位:	mm

上海洲日电子有限公司			
Shanghai Zhouri Electronics CO.,LTD			
Shanghai KangSiWia Electronic Equipment import and export Co.,LTD			
tel:021-51571121 fax:021-51571120		http://www.zhour.i.net	
产品名称:	M12-A-XP-M-BH1-HX	图幅:	A4