



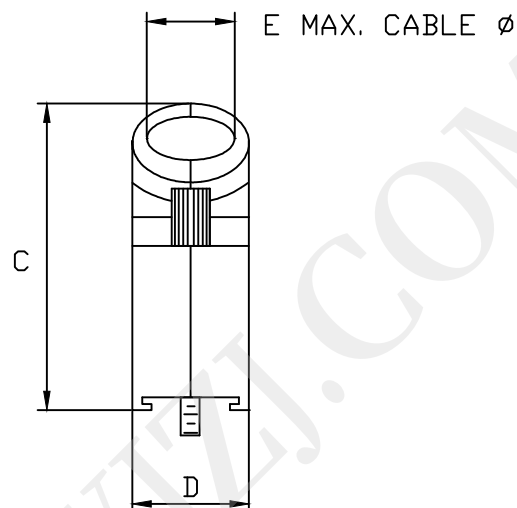

BACKSHELL KIT INCLUDES:

- (2)BACKSHELL HALVES
- (2)4-40 THUMBSCREWS
- (2)HOUSING SCREWS
- (1)SET OF COMPRESSION INSERTS-(9 POSITION~37 POSITION)
DIAMETERS:4mm(.157"),5mm(.197"),7mm(.276"),9mm(.351")
- (1)SET OF COMPRESSION INSERTS-(50 POSITION)
DIAMETERS:11mm(.433"),12.5mm(.492"),14mm(.551"),15mm(.591")

NOTE: 9 POSITION HAS ONLY 1 THUMBSCREW
(OPPOSITE CABLE ENTRY)
50 POSITION HAS 1 METAL CLAMP
AND 2 CLAMP SCREWS

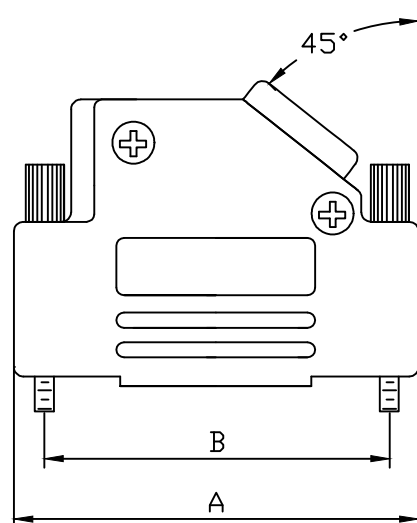

DIMENSIONS(mm/in)					
SIZE	A ± 1.0 ($\pm .04$)	B ± 0.25 ($\pm .01$)	C ± 1.8 ($\pm .07$)	D ± 0.5 ($\pm .02$)	E
9	31.0	24.99	36.3	14.5	13.0
	1.22	0.984	1.43	0.57	0.51
15	39.5	33.32	40.3	14.5	13.0
	1.56	1.312	1.59	0.57	0.51
25	53.2	47.04	40.3	14.5	13.0
	2.09	1.852	1.59	0.57	0.51
37	69.7	63.50	40.3	14.5	13.0
	2.74	2.500	1.59	0.57	0.51
50	67.4	61.11	44.9	17.4	17.0
	2.65	2.406	1.77	0.69	0.67

ORDERING INFORMATON:

SIZE	P/N - KITTED	PRODUCT CODE
9-WAY	6560-0106-11	MHD45ZK9-K
15-WAY	6560-0106-12	MHD45ZK15-K
25-WAY	6560-0106-13	MHD45ZK25-K
37-WAY	6560-0106-14	MHD45ZK37-K
50-WAY	6560-0106-15	MHD45ZK50-K

MATERIAL: DIE CAST ZINC ALLOY
NICKEL PLATED

4-40 THUMBSCREWS:STEEL-Zn PLATED

HOOD SCREWS:STEEL-Zn PLATED

CLAMP:STEEL-NICKEL PLATED

CLAMP SCREWS:STEEL-Zn PLATED

COMPRESSION INSERTS:ABS UL RECOGNIZED

OPERATING TEMP:-40°C TO+120°C

THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF MH CONNECTORS AND SHALL NOT BE
REPRODUCED, COPIED OR USED AS THE BASIS FOR
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT
WRITTEN PERMISSION.

DRAWN
Johnny

DATE
11-24-15

APPROVED
VICTOR

DATE
11-24-15



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.



**MH CONNECTORS ,
DIVISION OF EDAC**

SCALE
1 : 1

SHEET OF
1 OF 1

REV:
8.0

DRAWING No
MHD45ZK SERIES