THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.

* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: X.X ±0.15
X.XX ±0.05
UNIT: MM ANGLE ±1°

ISSUE NUMBER	
Original	①
Update the drawing frame;Current is updated from 5 AMP to 3 AMP. Iven Ou 2024/01/16	④

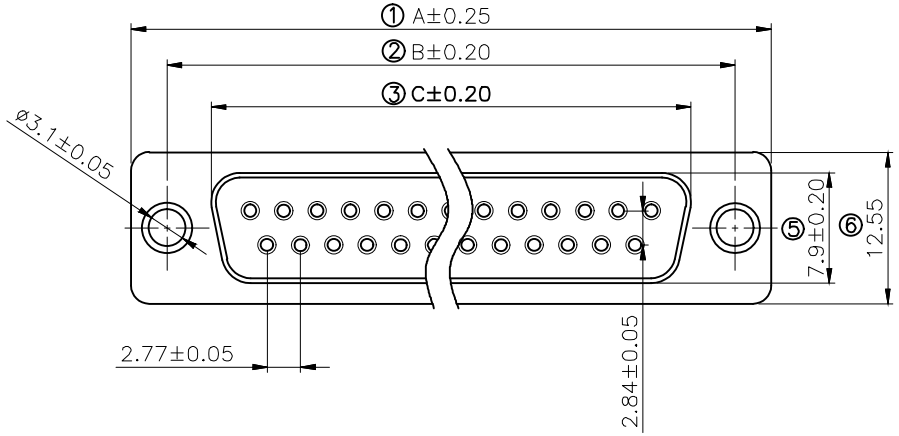

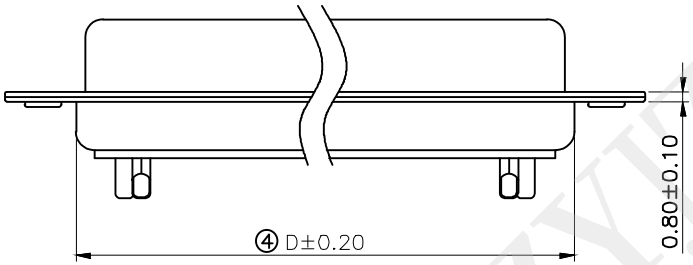

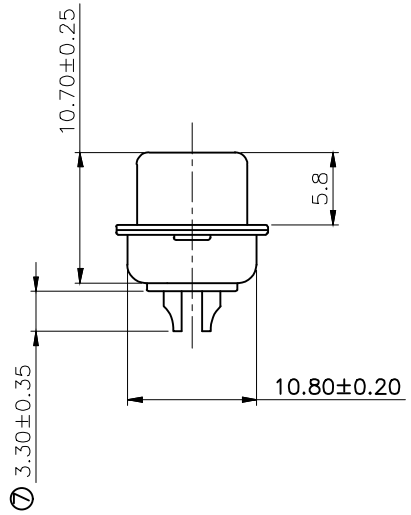

Remark:

1.SPECIFICATION:
- Rated voltage:250V
- Rates current:3AMP
- Contact resistance:20MΩ MAX
- Insulation resistance:1000MΩ MIN.at 500V DC
- Withstand voltage:500V Per mintute
- Temperature range:-55 -105 °C

2.MATERIAL:
- Plastic:PBT+30% G.F (UL94V-0) BLACK
- Terminal:brass ,tin-gold plated
- Spcc shell:Spcc front shell is nickel plated back shell is nickel plated

PN	PIN	A	B	C	D
MHDB9SS	09	30.88	24.88	16.17	18.94
MHDB15SS	15	39.20	33.30	24.66	27.50
MHDB25SS	25	53.02	47.04	38.38	41.20
MHDB37SS	37	69.40	63.50	55.20	57.40

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN	DATE
Johnny	2012/07/16
APPROVED	DATE

RoHS COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2015/863/EU AND 2011/65/EU FOR RoHS COMPLIANCY.

MH CONNECTORS

MH CONNECTORS , DIVISION OF EDAC

SCALE	SHEET OF	REV:
1 : 1	1 OF 1	4.0

DRAWING No
MHDB SS

WWW.DZYJZJ.COM