


| REV. | ECN. NO. | APPD. |
|------|----------|-------|
| A    |          |       |

NOTES:  
 Current Rating:3.0AMP  
 Contact Resistance:20mΩ max  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ min  
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass  
 Contact plating:Au or Sn Over Ni  
 Insulator Material:PBT or PA6T+30%GF(UL94V-0)

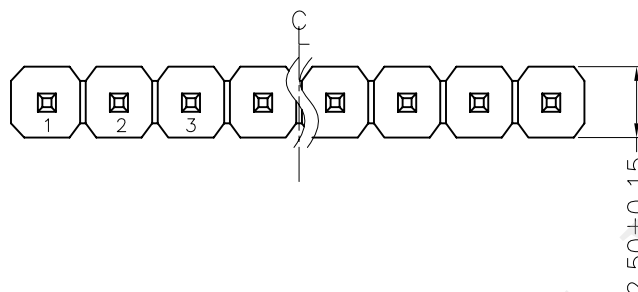



Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)



MTP125-11XXS1- X

No.of Pins per  
 Row: 01~40

Colour  
 R : red  
 Y : yellow  
 W : white  
 G : green  
 B : blue

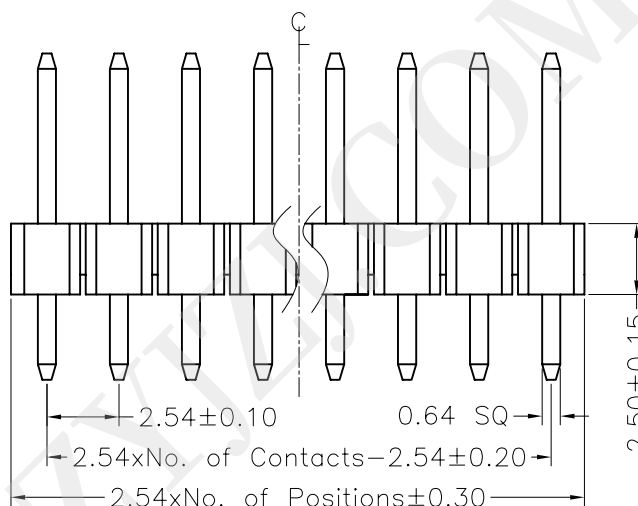

| Dimension antitheses list |      |      |
|---------------------------|------|------|
| ITEM                      | A    | B    |
| Standard                  | 3.00 | 6.00 |
| Alternate                 |      |      |

|                      |              |          |                        |                        |
|----------------------|--------------|----------|------------------------|------------------------|
| X. ± 0.30            | X.° ± 5°     | UNITS mm | NAME(INTENDED USE)     | MINTRON CO.,LTD.       |
| .X ± 0.20            | .X° ± 2°     | MAT'L    |                        |                        |
| .XX ± 0.10           | .XX° ± 1°    | FINISH   | PART NO.(INTENDED USE) | TITLE: MTP125-11XXS1-X |
| .XXX ± 0.05          | .XXX° ± 0.5° |          | APPD: SUNNY            | DWG NO.:               |
| PIN HEADER CONNECTOR |              | Q'TY     | CHKD: LISA             |                        |
|                      |              |          | DR: ZOE 2006-11-28     |                        |