



REV.	ECN. NO.	APPD.
A		

NOTES:
 Current Rating:3.0AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PBT or PA6T+30%GF(UL94V-O)

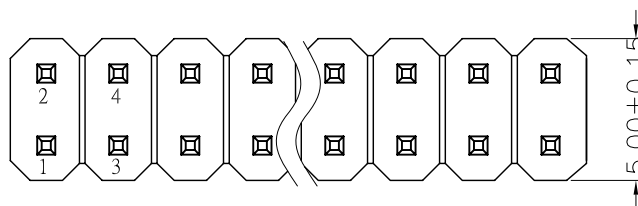

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)


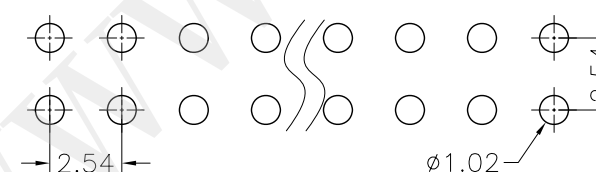


Ordering Information

MTP125-12XXS1- X

No.of Pins per
Row: 01~40

Colour
 R : red
 Y : yellow
 W : white
 G : green
 B : blue

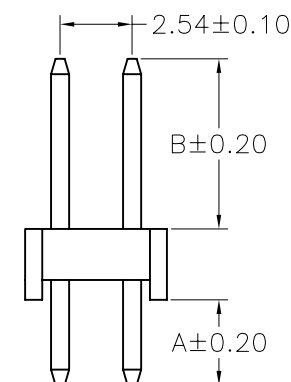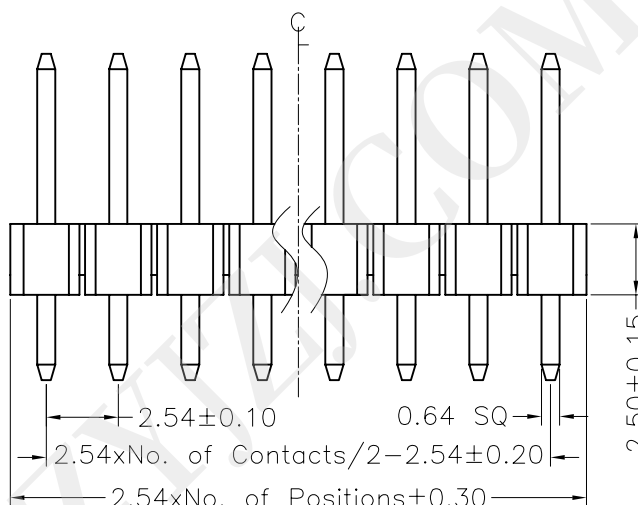

Dimension antitheses list		
ITEM	A	B
Standard	3.00	6.00
Alternate		

X. ± 0.30	X.° ± 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD				
.X ± 0.20	.X° ± 2°	MAT'L						
.XX ± 0.10	.XX° ± 1°	FINISH	PART NO.(INTENDED USE)	TITLE:				
.XXX ± 0.05	.XXX° ± 0.5°		Q'TY	APPD: SUNNY	MTP125-12XXS1-X			
PIN HEADER CONNECTOR			CHKD: LISA	DWG NO.:				
			DR: ZOE 2006-11-28		<table><tr><td>SCALE</td><td>SHEET</td><td>REV</td></tr><tr><td>1/1</td><td>1/1</td><td>A</td></tr></table>	SCALE	SHEET	REV
SCALE	SHEET	REV						
1/1	1/1	A						