



NOTES:
Current Rating:3.0AMP
Contact Resistance:20mΩ max
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact plating:Au or Sn Over Ni
Insulator Material:PBT or PA6T+30%GF(UL94V-0)



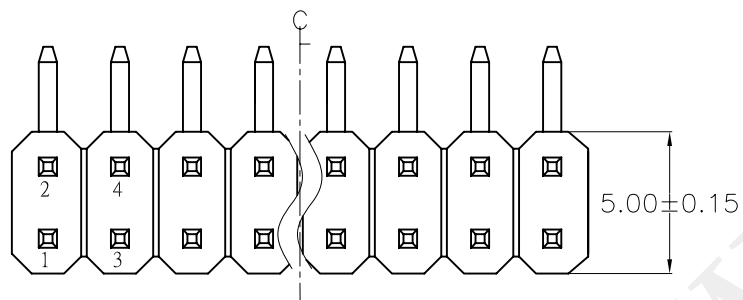


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

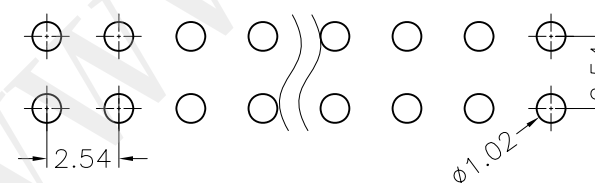

Ordering Information

MTP125-12XXR1

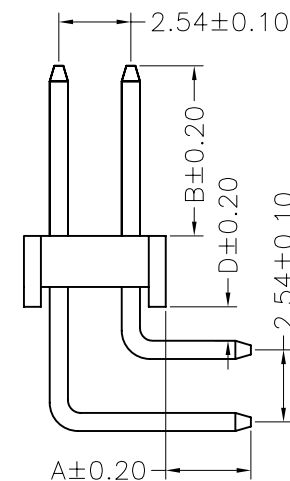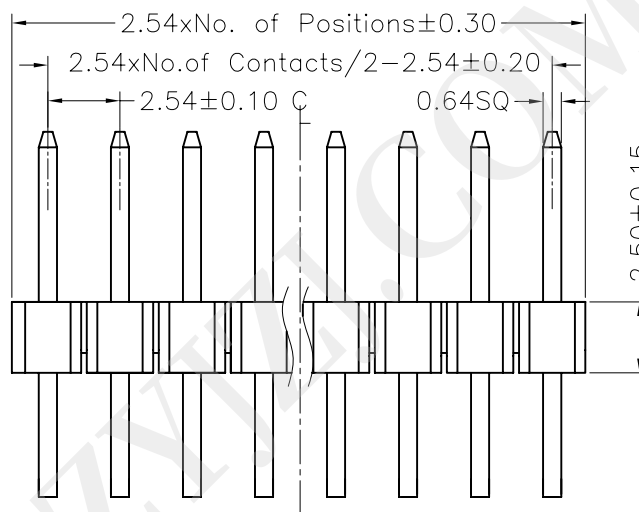

Dimension antitheses list			
ITEM	A	B	D
Standard	3.00	6.00	1.2
Alternate			

X. ± 0.30	X°. ± 5°	UNITS mm	NAME(INTENDED USE)	MINTRON CO.,LTD.			
.X ± 0.20	.X° ± 2°	MAT'L	PART NO.(INTENDED USE)	TITLE: MTP125-12XXR1			
.XX ± 0.10	.XX° ± 1°						
.XXX ± 0.05	.XXX° ± 0.5°	FINISH	APPD: SUNNY	DWG NO.:			
PIN HEADER CONNECTOR		Q'TY	CHKD: LISA				
			DR: ZOE 2006-11-28		SCALE 1 / 1	SHEET 1/1	REV A