


PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

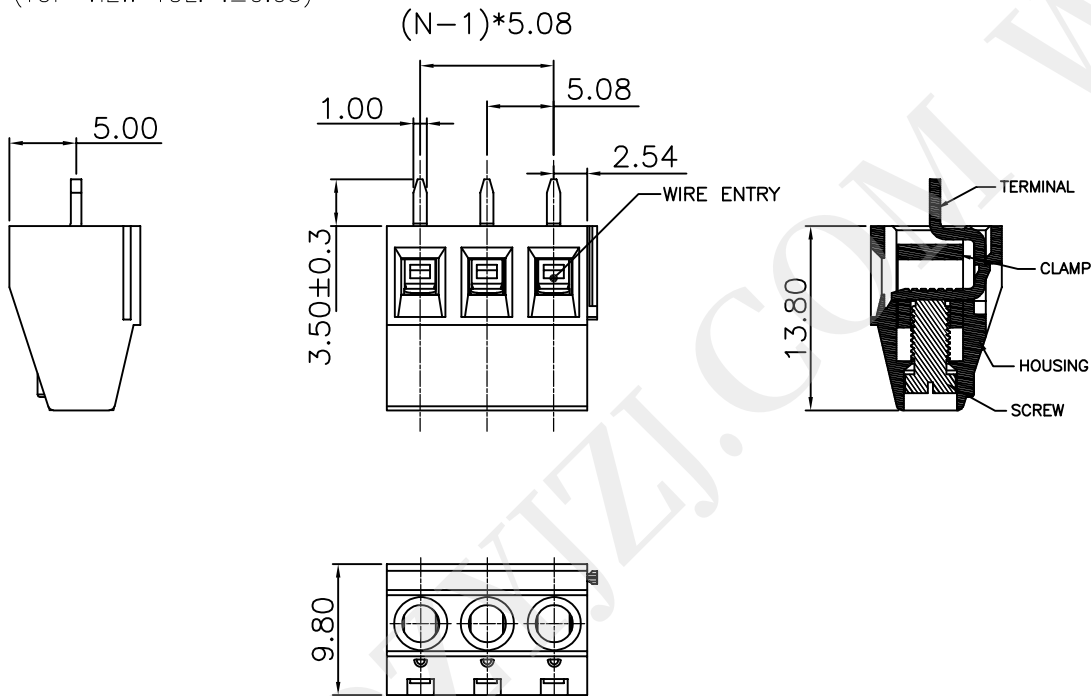

- NOTE 1:
UL标准(UL Standard)
- 1. 额定电压与电流: 300V/10A
Rated voltage/Rated current:300V/10A
 - 2. 功频耐压: AC2000V/Min
Withstanding Voltage:AC2000V/Min
 - 3. 线径范围: 28~12AWG
Wire range:28~12AWG
- IEC标准(IEC Standard)
- 1. 额定电压与电流: 250V/18A
Rated voltage/Rated current: 250V/18A
 - 2. 线径范围: 0.5~2.5mm²
Wire range : 0.5~2.5mm²
- NOTE 2:
- 1. 间距(Pitch): 5.08mm
 - 2. 使用温度范围: -40℃~+105℃
Operating temperature: -40℃~+105℃
 - 3. 剥线长度: 6~7mm
Stripping length: 6~7mm
 - 4. 符合RoSH环保要求
RoHS Compliance
 - 5. 额定扭矩:0.5.m 4.43[Lb. in]
(Rated torque):0.5N.m 4.43[Lb. in]
 - 6. 未标注公差表
Undimensioned tolerances

订购方式(HOW TO ORDER)

MX128V- 5.08-□□P-□ - □ - □□□□

型号 Series NO.	间距 Pitch	极数 Poles	客户型号 Customer Request
------------------	-------------	-------------	--------------------------

颜色(Color)

1. 灰色(Gray)	2. 蓝色(Blue)
3. 黑色(Black)	4. 绿色(Green)
5. 橙色(Orange)	6. 红色(Red)
7. 黄色(Yellow)	8. 白色(White)
9. 透明(Transparent)	

4	(Cage)方盒	(Copper alloy) 铜合金	(Ni plated)镀镍	公差一览表 TOLERANCE UNLESS OTHERWISE	 安徽亿思特电子科技有限公司 ANHUI EAST ELECTRONIC TECHNOLOGY CO.,LTD	单位名称 UNITS	mm	制图 DRAWING	产品名称 TITLE	MX128V-5.08-XXP-1X-XXAH
3	(Terminal)焊针	(Copper alloy) 铜合金	(Sn plated)镀锡							
2	(Screw)螺丝 M3	(Steel) 钢	(Ni plated)镀镍							
1	(Housing)塑件	PA66	UL94V-0							
ITEM	NAME OF PART	MATERIAL	NOTES							
				日期 DATE	2012. 07. 10	版本 VER	A0	核准 APPD	图号 DRAW NO.	MX128V50800A