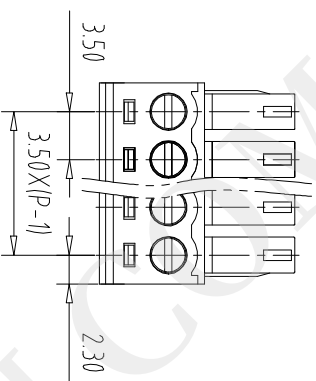


NOTES:

UL Standard

Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2.Torque value: M2.0, 1.77Lb.in

3. Wire range: 28~16AWG

IEC Standard

Pollution Degree	3	2	2
Overvoltage Category	III	II	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M_2 , 0.2Nm

3. wire range: $0.2 \sim 1.5 \text{ mm}^2$

NOTES:

1.Housing: PA66 (UL94V-0)

2.Cover: PA66 (UL94V-0)

3. Cage: Brass (Ni Plated)

4. Clamp: Copper alloy (Ni Plated)

5.Screw: Steel (M2.0,Zn Plated)

NOTES:

1.Pitch: 3.5mm Poles: 02-24P

2.Stripping length: 6-7mm

3. Operating temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

4. RoHS Compliance

How to order

MX15EDGK - 3.5 - XXP - XXXX - XX - X - X

产品型号

间距

「極數」

01:常規顏色

02-99:

定制颜色

1

A-Z其他定制

2006

○：一寸紫

1: 5 十子線五

— 1 —

Fe:铁刀珠

Pitch Range In mm	Nominal Dimension Range In mm		Nominal Dimension Range					
	Over	Over	Over	Over	Over	Over	—	∪
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150	0.1/10		
6	10	24	30	60	100	150	∠	
0.15 ±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°	

		2		1	
REV	E.C.N NO.	CONTENT	CHK	DATE	

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	CKK	DATE 22.09.14	UNITS	MM	SHEET/OF	1/1	
G/K.		DATE	SCALE	1 : 1	A4		
APP.		DATE	NAME MX15EDGK-3.5-XXP				
 CIXI MAXXU ELECTRONICS CO.,LTD. 慈溪市近旭电子有限公司			DWGNO.				