



注：本板为禁止转输、复制、编辑、修改、以及用其内容进行交流

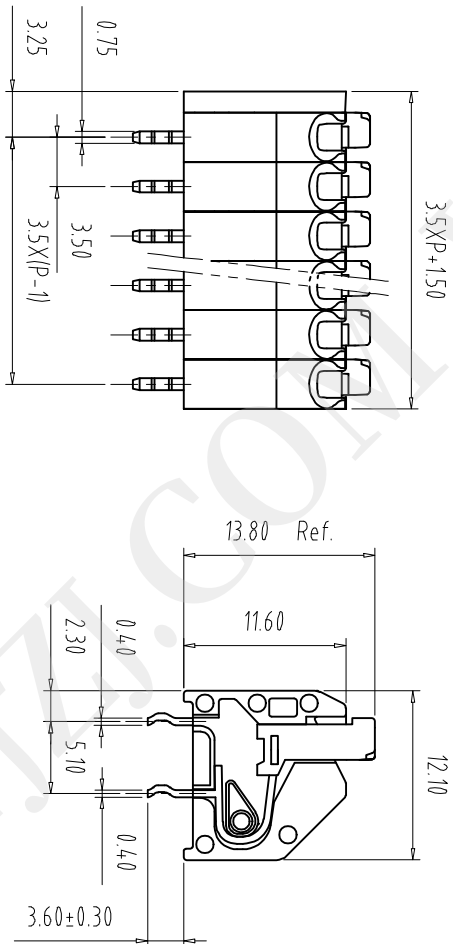

NOTES1:
UL Standard
1.Rating voltage/current: 300V/8A
2.withstanding voltage: AC2000V/1Min
3.Wire range: 22~16AWG
IEC Standard
1.Rating voltage/current: 400V/8A
2.wire range: 1.5mm²

NOTES2:
1.Housing: PA66 (UL94V-0)
2.Pin header: Hosphor bronze(Tin plate)

NOTES3:
1.Pitch: 3.5mm Poles: 01-XXP
2.Stripping length: 9mm
3.Operating temperature: -40℃~+105℃
4.RoHS Compliance

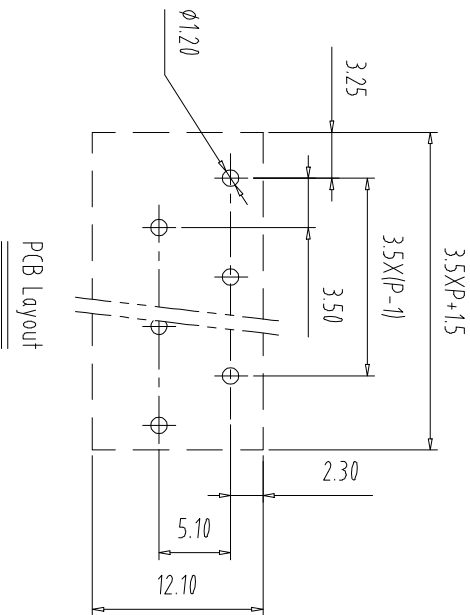

PCB Layout

Pitch Range In mm		Nominal Dimension Range In mm		—	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150
TO 6	TO 10	TO 30	TO 60	TO 100	TO 150
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±0.30	±0.30	±0.30	±0.50	±1.00	±1.30
±2°	±2°	±2°	±2°	±2°	±2°

REV	ECN NO.	CONTENT	CHK	DATE
-----	---------	---------	-----	------

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE	
DWG.	CHK	DATE	23.07.05	UNITS	MM	SHEET/OF	1/1
CHK		DATE		SCALE	1 : 1	A4	
APP.		DATE		NAME			
 CIXI MAIXU ELECTRONICS CO.,LTD.				MX250-3.5-XXP-A			
MAIXU 慈溪市迈旭电子有限公司							
DWGNO.							