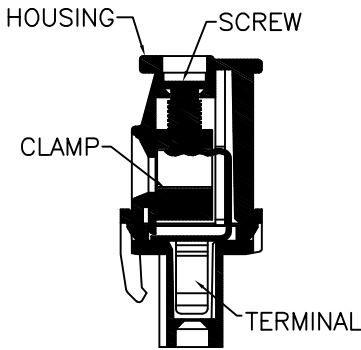
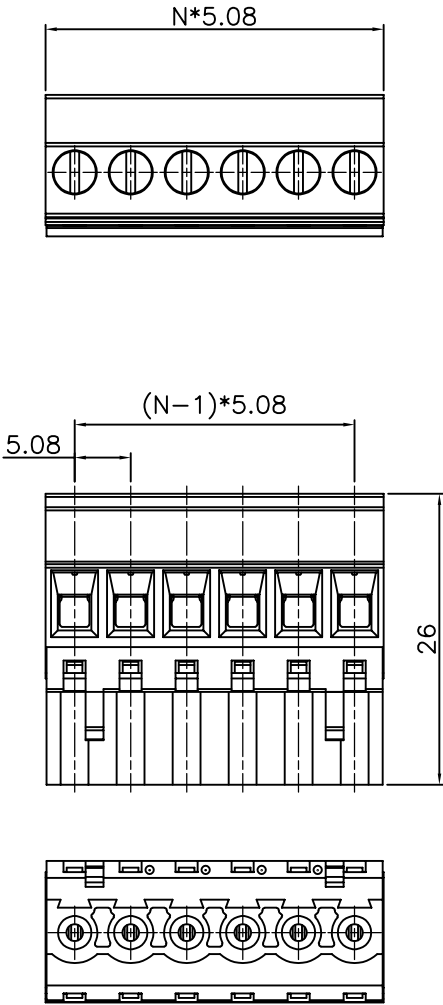


NOTE 1:  
UL标准 (UL Standard)  
1. 额定电压与电流: 300V/15A  
Rated voltage/Rated current:300V/15A  
2. 功频耐压: AC1600V/Min  
Withstanding Voltage:AC1600V/Min  
3. 线径范围: 28~12AWG  
Wire range:28~12AWG  
IEC标准 (IEC Standard)  
1. 额定电压与电流: 320V/10A  
Rated voltage/Rated current: 320V/10A  
2. 线径范围: 2.5mm<sup>2</sup>  
Wire range : 2.5mm<sup>2</sup>  
NOTE 2:  
1. 间距 (Pitch): 5.08mm  
2. 使用温度范围: -40℃~+105℃  
Operating temperature: -40℃~+105℃  
3. 剥线长度: 7~8mm  
Stripping length: 7~8mm  
4. 符合RoSH环保要求  
RoHS Compliance  
5. 额定扭矩:0.4N.m 3.54[Lb. in]  
(Rated torque):0.4N.m 3.54[Lb. in]  
6. 未标注公差表  
Undimensioned tolerances

订购方式 (HOW TO ORDER)  
MX2EDGKA -5.08-□□P-□ - □ - □□□□

型号 间距 极数 客户型号  
Series NO. Pitch Poles Customer Request

颜色 (Color)  
1. 灰色 (Gray) 2. 蓝色 (Blue)  
3. 黑色 (Black) 4. 绿色 (Green)  
5. 橙色 (Orange) 6. 红色 (Red)  
7. 黄色 (Yellow) 8. 白色 (White)  
9. 透明 (Transparent)

|      |              |                    |               |                                     |                                                                                                                                                             |               |     |                |                  |                           |
|------|--------------|--------------------|---------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----|----------------|------------------|---------------------------|
| 4    | (Cage)方盒     | (Copper alloy) 铜合金 | (Ni plated)镀镍 | 公差一览表<br>TOLERANCE UNLESS OTHERWISE | <div>安徽亿思特电子科技有限公司<br/>ANHUI EAST ELECTRONIC TECHNOLOGY CO., LTD</div> | 单位名称<br>UNITS | mm  | 制图<br>DRAWING  | 产品名称<br>TITLE    | MX2EDGKA-5.08-XXP-1X-XXAH |
| 3    | (Contact)触点  | (Copper alloy) 铜合金 | (Ni plated)镀镍 |                                     |                                                                                                                                                             |               |     |                |                  |                           |
| 2    | (Screw)螺丝 M3 | (Steel) 钢          | (Ni plated)镀镍 |                                     |                                                                                                                                                             |               |     |                |                  |                           |
| 1    | (Housing)塑件  | PA66               | UL94V-0       |                                     |                                                                                                                                                             |               |     |                |                  |                           |
| ITEM | NAME OF PART | MATERIAL           | NOTES         |                                     |                                                                                                                                                             |               |     |                |                  |                           |
|      |              |                    |               | 日期<br>DATE                          | 2026.08.05                                                                                                                                                  | 比例<br>SCALE   | 1:1 | 审核<br>CHKD     | 产品料号<br>PART NO. | MX2EDKA-5.08              |
|      |              |                    |               | 版本<br>VER                           | A0                                                                                                                                                          | 核准<br>APPD    |     | 图号<br>DRAW NO. | MX2EDGKA50800A   |                           |