



N*5.08




(N-1)*5.08

5.08

26

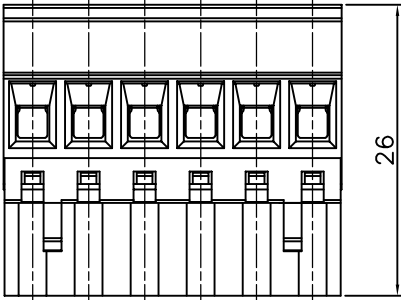




HOUSING

SCREW

CLAMP


TERMINAL



12.6

8.30

5.65

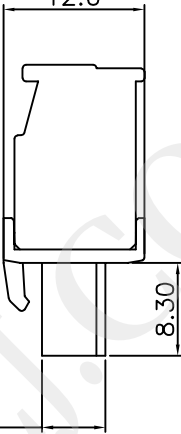

NOTE 1:

UL标准 (UL Standard)

1. 额定电压与电流: 300V/15A
Rated voltage/Rated current:300V/15A

2. 功频耐压: AC1600V/Min
Withstanding Voltage:AC1600V/Min

3. 线径范围: 28~12AWG
Wire range:28~12AWG

IEC标准 (IEC Standard)

1. 额定电压与电流: 320V/10A
Rated voltage/Rated current: 320V/10A

2. 线径范围: 2.5mm²
Wire range : 2.5mm²

NOTE 2:

1. 间距 (Pitch): 5.08mm
2. 使用温度范围: -40℃~+105℃
Operating temperature: -40℃~+105℃

3. 剥线长度: 7~8mm
Stripping length: 7~8mm

4. 符合RoSH环保要求
RoHS Compliance

5. 额定扭矩:0.4N.m 3.54[Lb. in]
(Rated torque):0.4N.m 3.54[Lb. in]

6. 未标注公差表
Undimensioned tolerances

订购方式 (HOW TO ORDER)

MX2EDGKA -5.08-□□P-□ - □ - □□□□

型号

间距

极数

客户型号

Series NO.

Pitch

Poles

Customer Request

颜色 (Color)

1. 单间距
Single Pitch

2. 双间距
Double Pitch

1. 灰色 (Gray) 2. 蓝色 (Blue)

3. 黑色 (Black) 4. 绿色 (Green)

5. 橙色 (Orange) 6. 红色 (Red)

7. 黄色 (Yellow) 8. 白色 (White)

9. 透明 (Transparent)

4	(Cage)方盒	(Copper alloy) 铜合金	(Ni plated)镀镍	公差一览表 TOLERANCE UNLESS OTHERWISE	安徽亿思特电子科技有限公司 ANHUI EAST ELECTRONIC TECHNOLOGY CO., LTD				产品名称 TITLE		MX2EDGKA-5.08-XXP-1X-XXAH
3	(Contact)触点	(Copper alloy) 铜合金	(Ni plated)镀镍		单位 UNITS	mm	制图 DRAWING	产品料号 PART NO.	MX2EDKA-5.08	图号 DRAW NO.	MX2EDGKA50800A
2	(Screw)螺丝 M3	(Steel) 钢	(Ni plated)镀镍		角法 VIEW		设计 DESIGN				
1	(Housing)塑件	PA66	UL94V-0		比例 SCALE	1:1	审核 CHKD				
ITEM	NAME OF PART	MATERIAL	NOTES		日期 DATE	2026.08.05	版本 VER	A0	核准 APPD		