


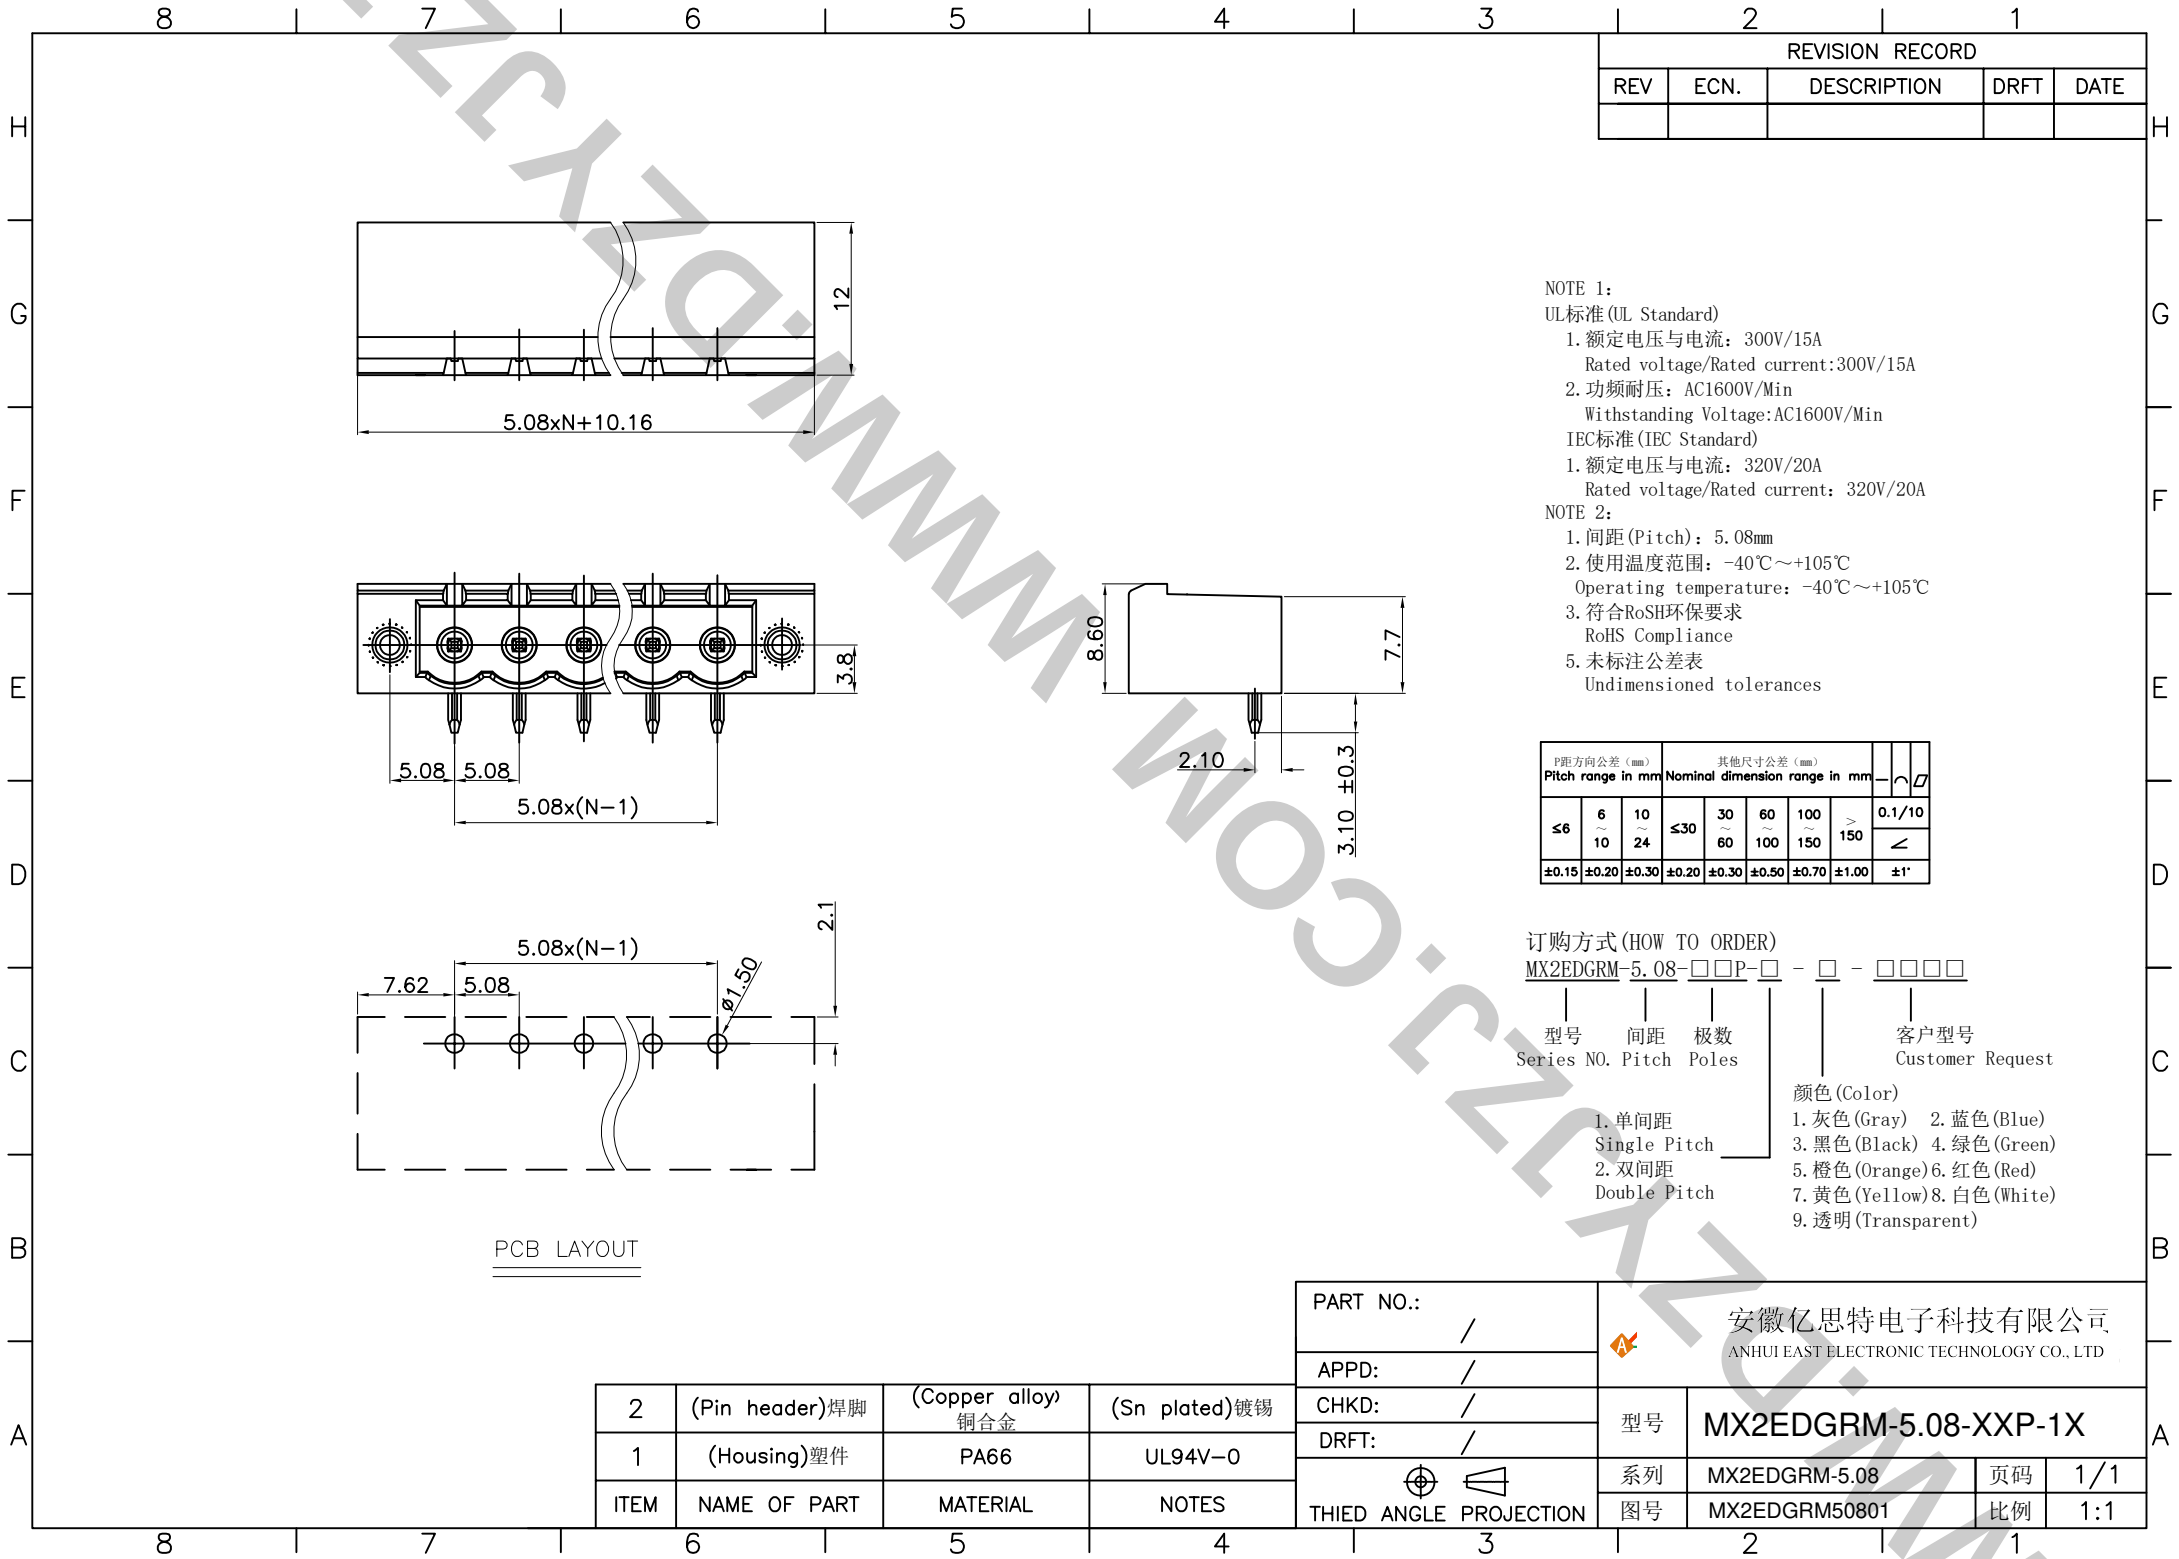

REVISION RECORD				
REV	ECN.	DESCRIPTION	DRFT	DATE

NOTE 1:
UL标准 (UL Standard)
1. 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A
2. 功频耐压: AC1600V/Min
Withstanding Voltage: AC1600V/Min
IEC标准 (IEC Standard)
1. 额定电压与电流: 320V/20A
Rated voltage/Rated current: 320V/20A

NOTE 2:
1. 间距 (Pitch): 5.08mm
2. 使用温度范围: -40℃~+105℃
Operating temperature: -40℃~+105℃
3. 符合RoSH环保要求
RoHS Compliance
5. 未标注公差表
Undimensioned tolerances

Pitch range in mm		Nominal dimension range in mm						0.1/10
≤6	6~10	10~24	≤30	30~60	60~100	100~150	>150	∠
±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1°

订购方式 (HOW TO ORDER)

MX2EDGRM-5.08-□□P-□-□-□□□□

型号 间距 极数 客户型号
Series NO. Pitch Poles Customer Request

- 颜色 (Color)
1. 灰色 (Gray) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)

PCB LAYOUT

2	(Pin header) 焊脚	(Copper alloy) 铜合金	(Sn plated) 镀锡
1	(Housing) 塑件	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /		安徽亿思特电子科技有限公司 ANHUI EAST ELECTRONIC TECHNOLOGY CO., LTD			
APPD: /					
CHKD: /					
DRFT: /					
 THIED ANGLE PROJECTION		型号	MX2EDGRM-5.08-XXP-1X		
		系列	MX2EDGRM-5.08	页码	1/1
		图号	MX2EDGRM50801	比例	1:1