

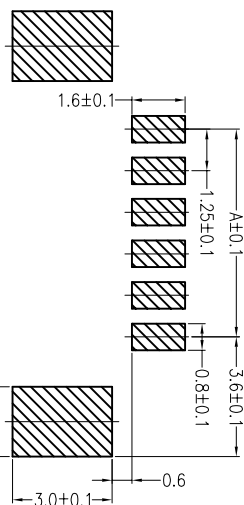
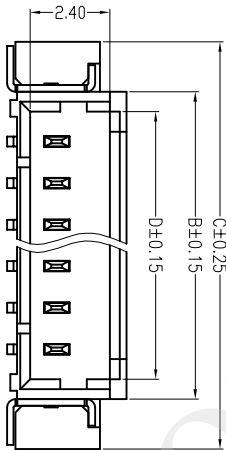





REV	LOCAS	DESCRIPTION	DRAW	DATE
A0	NEW	PERLUMINARY	Andy	2022.06.21

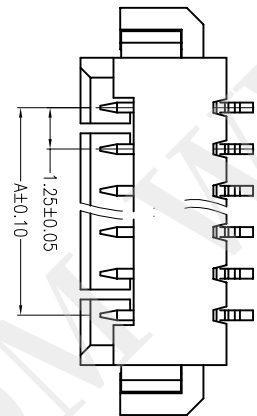

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

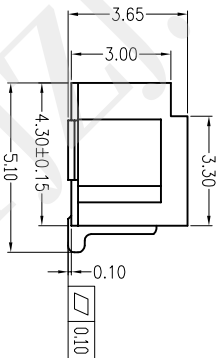

- NOTE:
1. MATERIAL:
- 1.1 HOUSING: LCP, UL94V-0,
- 1.2 CONTACT: C2680
- 1.3 PEG: C2680
2. FINISH:
- 2.1 CONTACT: Plating Tin Over Nickel
- 2.2 PEG: Plating Tin Over Nickel
3. PERFORMANCE CHARACTERISTICS:
- 3.1 CURRENT RATING: 1.0 A
- 3.2 VOLTAGE RATING: 50 VAC
- 3.3 CONTACT RESISTANCE: 40mΩ MAX
- 3.4 INSULATION RESISTANCE: 100MΩ MIN
- 3.5 OPERTING TEMPERATUER: -25℃ TO 85℃

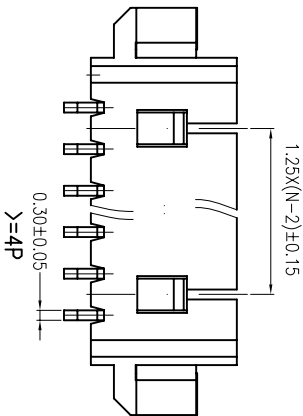

CKT	DimA	DimB	DimC	DimD
2	1.25	4.45	7.45	3.05
3	2.50	5.70	8.70	4.30
4	3.75	6.95	9.95	5.55
5	5.00	8.20	11.20	6.80
6	6.25	9.45	12.45	8.05
7	7.50	10.70	13.70	9.30
8	8.75	11.95	14.95	10.55
9	10.00	13.20	16.20	11.8
10	11.25	14.45	17.45	13.05
11	12.50	15.70	18.70	14.3
12	13.75	16.95	19.95	15.55
13	15.00	18.20	21.20	16.80
14	16.25	19.45	22.45	18.05
15	17.50	20.70	23.70	19.3
16	18.75	21.95	24.95	20.55

Ordering Information

P: Pin Header Series
A: Finished Product
No. of PINS
Plating Number
12.鍍錫
01.鍍金G/F

P A XX XX 125 365-333-XX S M S

S: SMT TYPE
D: DIP TYPE
F: Female(排母)
M: Male(排針)
S: Single(單排)
D: Double(雙排)
XX: Colour
01: Nature (本色)
02: Black (黑色)
03: Blue (藍色)

125: Pitch 1.25mm
365: Height 3.65mm
Running number



Dongguan D-CHAIN Precision Components Co., Ltd

TITLE: 1.25Pitch Wafer SMT TYPE 90°

DRAWN	Andy	DATE	2022.06.21	TITLE: 1.25Pitch Wafer SMT TYPE 90°					
CHECKED		DATE							
APPROVED		DATE							
PART No.	PAXXXX125365-333-XSMS			REV:	A0	SCALE:	1:1	UNIT:	mm
DRAWING No.				SIZE:	A4	SHEET:	1/1		