

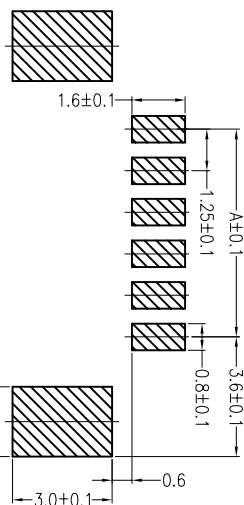
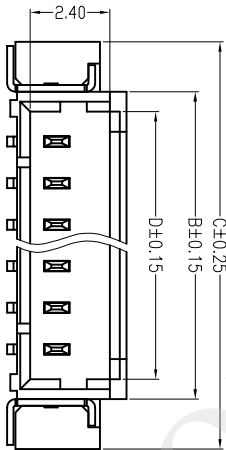





REV	LOCAS	DESCRIPTION	DRAW	DATE
A0	NEW	PERLUMINARY	Andy	2022.06.21

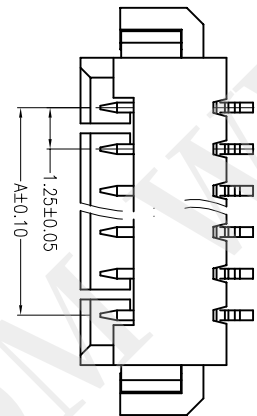

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

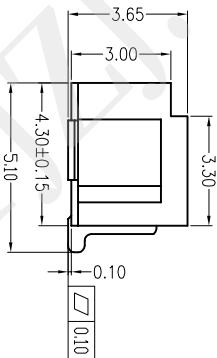

- NOTE:
- 1.MATERIAL:
- 1.1 HOUSING:LCP,UL94V-0,
- 1.2 CONTACT:C2680
- 1.3 PEG:C2680
- 2.FINISH:
- 2.1 CONTACT:Plating Tin Over Nickel
- 2.2 PEG:Plating Tin Over Nickel
- 3.PERFORMANCE CHARACTERISTICS:
- 3.1 CURRENT RATING:1.0 A
- 3.2 VOLTAGE RATING:50 VAC
- 3.3 CONTACT RESISTANCE:40mΩ MAX
- 3.4 INSULATION RESISTANCE:100MΩ MIN
- 3.5 OPERTING TEMPERATUER:-25℃ TO 85℃

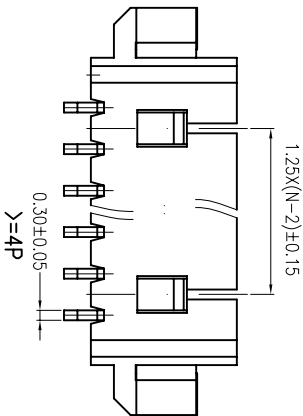

CKT	DimA	DimB	DimC	DimD
2	1.25	4.45	7.45	3.05
3	2.50	5.70	8.70	4.30
4	3.75	6.95	9.95	5.55
5	5.00	8.20	11.20	6.80
6	6.25	9.45	12.45	8.05
7	7.50	10.70	13.70	9.30
8	8.75	11.95	14.95	10.55
9	10.00	13.20	16.20	11.8
10	11.25	14.45	17.45	13.05
11	12.50	15.70	18.70	14.3
12	13.75	16.95	19.95	15.55
13	15.00	18.20	21.20	16.80
14	16.25	19.45	22.45	18.05
15	17.50	20.70	23.70	19.3
16	18.75	21.95	24.95	20.55

Ordering Information

P:Pin Header Series
A:Finished Product
No.of PINS
Plating Number
12.镀锡
01.镀金G/F

P A XX XX 125 365-333-XX S M S

S:SMT TYPE
D:DIP TYPE
F:Female(排母)
M:Male(排针)
S:Single(单排)
D:Double(双排)
XX:Colour
01:Nature (本色)
02:Black (黑色)
03:Blue (蓝色)

125:Pitch 1.25mm
365:Height 3.65mm
Running number



Dongguan D-CHAIN Precision Components Co.,Ltd

TITLE:
1.25Pitch Wafer SMT TYPE 90°

MEASURE POINT:		QUADRANT POINT		TANGENCY POINT		INTERSECTION POINT	
UNLESS OTHERWISE SPECIFIED,TOLERANCE:		X.		Xx		X.xx	
±0.25		±0.20		±0.15		±3°	
DRAWN		Andy		DATE		2022.06.21	
CHECKED		DATE		DATE		DATE	
APPROVED		DATE		DATE		DATE	
PART No.		PAXXXX125365-333-XXSMS		REV: A0		SCALE: 1:1	
DRAWING No.		SIZE: A4		SHEET: 1/1		UNIT: mm	