
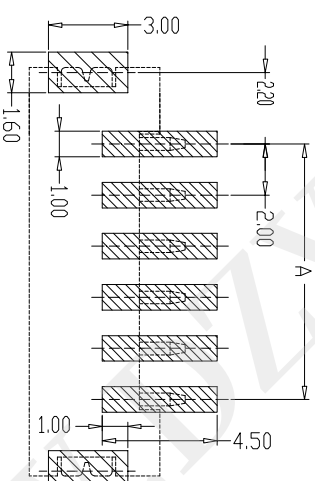
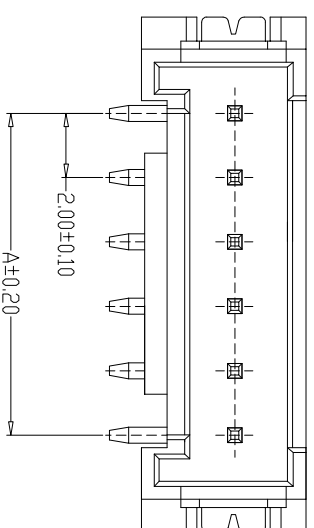


REV	LOCAS	DESCRIPTION	DRAW	DATE
A0	NEW	PERLIMINARY	Long	2018.05.26
A1	ΔΔ	UPDATED	Andy	2022.09.29

SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -25℃~+85℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000MΩ Min
 - 6、Withstanding Voltang: 800V AC/minute
 - 7、Material:Wafer LCP, UL94V-0
- PIN Brass Tin-plated
Solder Phosphoric bronze Tin-plated

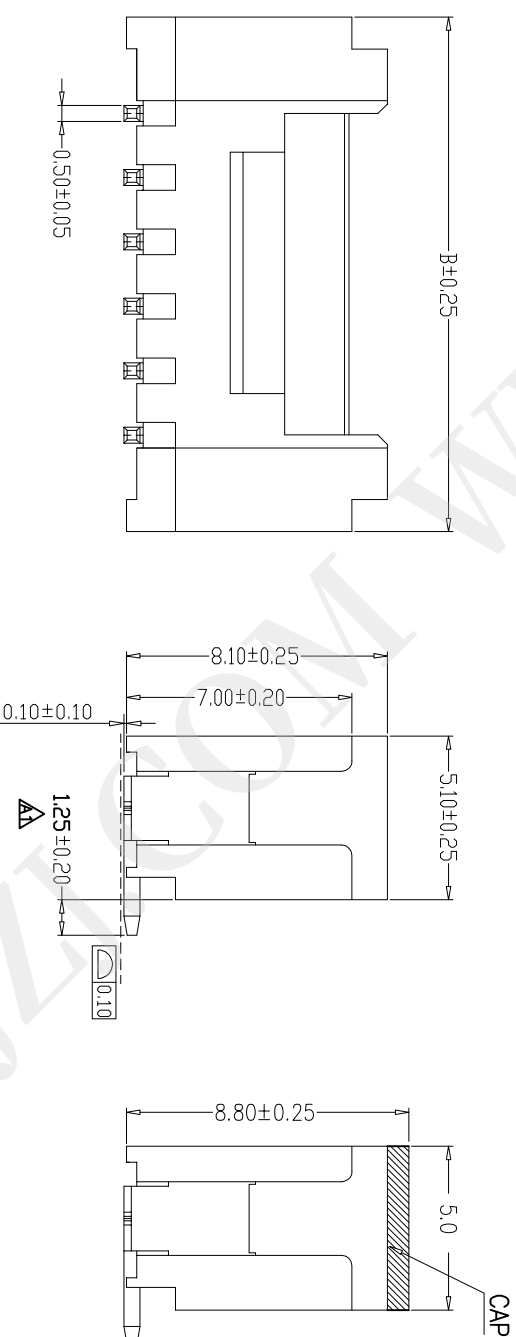

PCB LAYOUT
TOLERANCE ±0.05

PIN Number	Dimension(mm)	
	A	B
2P	2.00	8.00
3P	4.00	10.00
4P	6.00	12.00
5P	8.00	14.00
6P	10.00	16.00
7P	12.00	18.00
8P	14.00	20.00
9P	16.00	22.00
10P	18.00	24.00
11P	20.00	26.00
12P	22.00	28.00
...	...	...
20P	38.00	44.00

Ordering Information

P A XX 12 200 810 -106 S M S

P:Pin Header Series
A:Finished Product
No.of PINs:
Plating Number:
200:Pitch2.00mm
810:Height 8.10mm

S:SMT TYPE
D:DIP TYPE
M:Male(排针)
F:Female(排母)
S:Single(单排)
D:Double(双排)
Running number

MEASURE POINT:
QUADRANT POINT
TANGENCY POINT
INTERSECTION POINT

UNLESS OTHERWISE
SPECIFIED,TOLERANCE:
X ±0.25
Xx ±0.20
Xxx ±0.15
ANGULAR ±5

D-CHAIN
DONG GUAN D-CHAIN TECHNOLOGY CO.,LTD

DRAWN	Long	DATE	2018.05.26	TITLE:	2.00Pitch Wafer SMT TYPE
CHECKED		DATE			
APPROVED		DATE			
PART No.	PAXX12200810-106SMS	REV: A1	SCALE: 1:1	UNIT: mm	
DRAWING No.		SIZE: A4	SHEET: 1/1		