
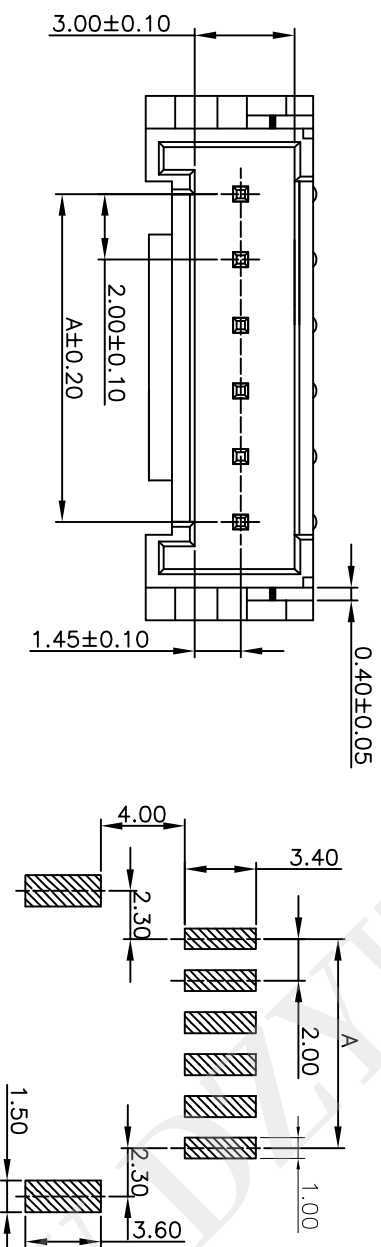


REV	LOCAS	DESCRIPTION	DRAW	DATE
A0	NEW	PERLIMINARY	Long	2018.04.06

SPECIFICATIONS

- 1、Current Rating:2A
- 2、Voltage Rating:100V
- 3、Temperature Range:-25℃~+85℃
- 4、Contact Resistance:20mΩ Max
- 5、Insulation Resistance:1000MΩ Min
- 6、Withstanding Voltang:800V AC/minute
- 7、Material & Finish:
Housing:LCP, UL94 V-0
PIN:Brass, Plated Tin
Nail:Brass, Plated Tin

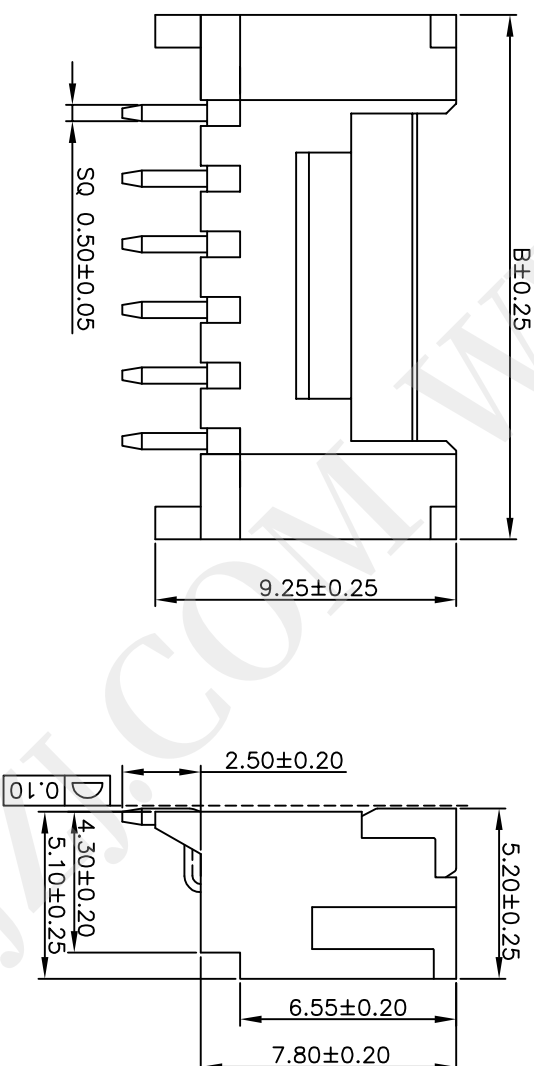

Ordering Information

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE:±0.05 (TOP VIEW)

Circuits	Dimensions mm	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00
17	32.00	38.00
18	34.00	40.00
19	36.00	42.00
20	38.00	44.00

P:Pin Header Series
A:Finished Product
No.of PINS
Plating Number
200:Pitch 2.00mm
520:Height 5.20mm

P A XX 12 200 520- 92 S M S

S:SMT TYPE
D:DIP TYPE
M:Male(排针)
F:Female(排母)
S:Single(单排)
D:Double(双排)
Running number

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT		 	
UNLESS OTHERWISE SPECIFIED,TOLERANCE: X. X.X X.XX ANGULAR		±0.25 ±0.20 ±0.15 ±3°	
DRAWN		Long	DATE 2018.04.06
CHECKED			DATE
APPROVED			DATE
PART No.		PAXX12200520-92SMS	REV: A0
DRAWING No.			SCALE: 1:1
		SIZE: A4	SHEET: 1/1
TITLE: Pitch2.0 Water SMT TYPE		UNIT: mm	

DONG GUAN D-CHAIN TECHNOLOGY CO.,LTD