
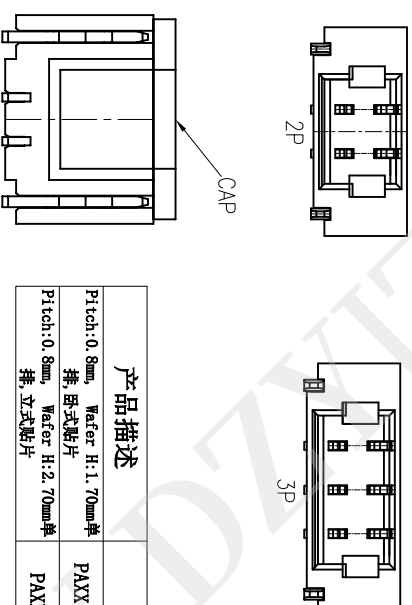
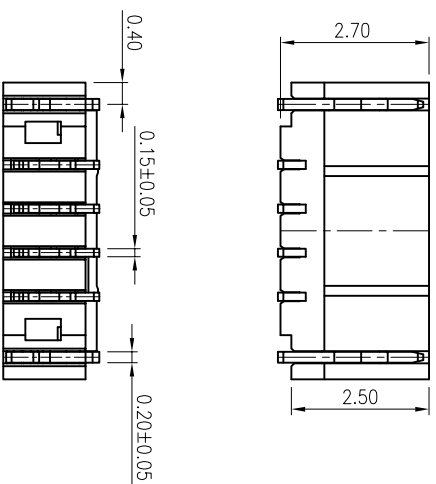


REV	LOCAS	DESCRIPTION	DRAW	DATE
A0	NEW	PERLIMINARY	Long	2018.06.16
A1		updated	LUU	2019.06.15
A2		updated	LUU	2020.07.07
A3		updated	Anyd	2022.07.21

SPECIFICATIONS

Current Rating: 0.5A
Voltage Rating: 30V
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 200V AC/minute
Terminal: Phosphor Bronze,Plated Au
Nail: Phosphor Bronze,Plated Au
Housing: LCP,UL94V-0,Color: Natural
Cap: Nylon 6T,UL94V-0,Color: Natural

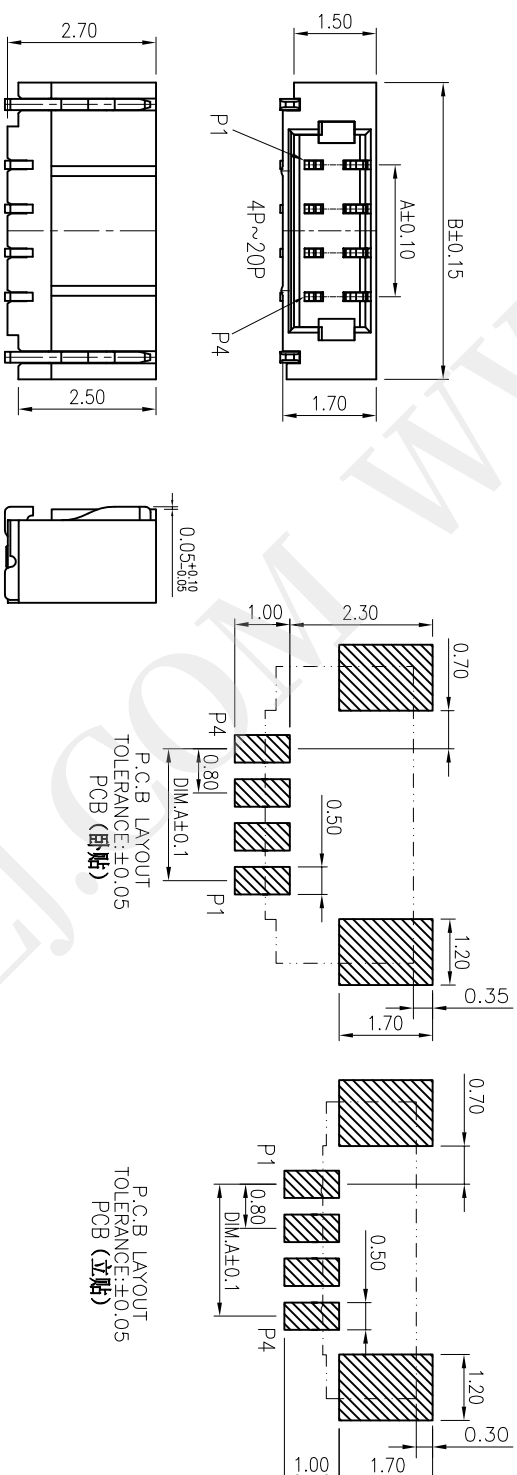

产品描述	产品料号
Pitch: 0.8mm Wafer H: 1.70mm 单 排, 卧式贴片	PAXXI2080170-75-X3SMS
Pitch: 0.8mm Wafer H: 2.70mm 单 排, 立式贴片	PAXXI2080270-113SMS

No. of	DM A	DM B	No. of	DM A	DM B
—	—	—	11P	8.00	11.00
02P	0.80	3.80	12P	8.80	11.80
03P	1.60	4.60	13P	9.60	12.60
04P	2.40	5.40	14P	10.40	13.40
05P	3.20	6.20	15P	11.20	14.20
06P	4.00	7.00	16P	12.00	15.00
07P	4.80	7.80	17P	12.80	15.80
08P	5.60	8.60	18P	13.60	16.60
09P	6.40	9.40	19P	14.40	17.40
10P	7.20	10.20	20P	15.20	18.20

Ordering Information

P: Pin Header Series _____ P A XX 12 080 270-113 S M S
 A: Finished Product _____
 No. of PINS _____
 Plating Number: _____
 080: Pitch 0.80mm _____
 S: SMT TYPE
 D: DIP TYPE
 M: Male(排针)
 F: Female(排母)
 S: Single(单排)

立贴产品示意图

MEASURE POINT:			
QUADRANT POINT			
TANGENCY POINT			
INTERSECTION POINT			
UNLESS OTHERWISE SPECIFIED, TOLERANCE:			
X	±0.25		
X,x	±0.20		
X,x,x	±0.15		
ANGULAR	±3°		
			
D-CHAIN		DONG GUAN D-CHAIN TECHNOLOGY CO.,LTD	
DRAWN	LUU	DATE	2019.06.15
CHECKED		DATE	
APPROVED		DATE	
PART No.	PAXXI2080270-113SMS		
TITLE: Pitch:0.8mm Wafer H:2.70mm单排, 立式贴片			
SIZE: A4	REV: A3	SCALE: 1:1	UNIT: mm
SHEET: 1/1			