
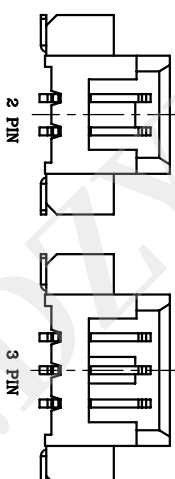
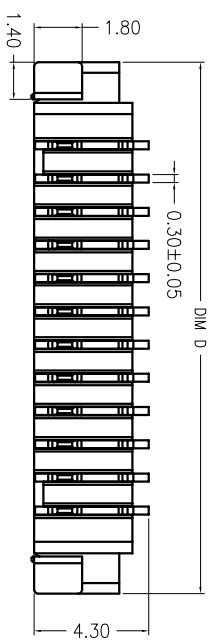
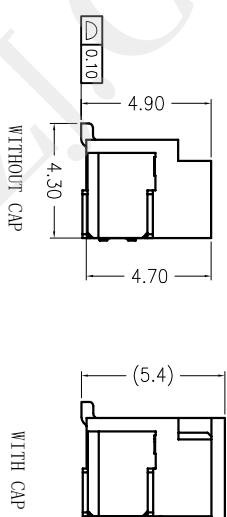
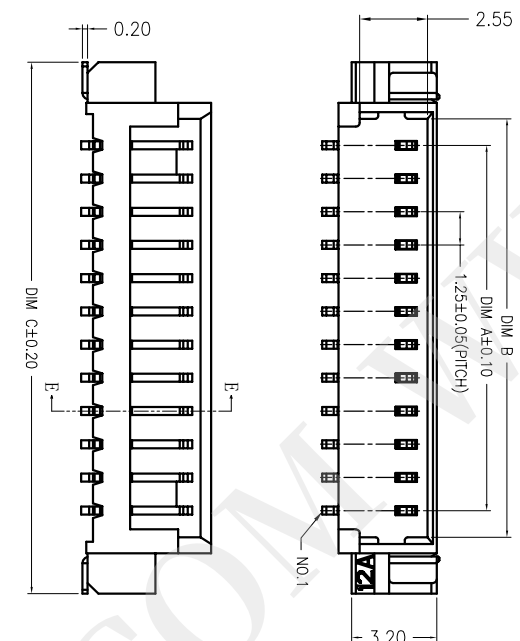


REV	LOCALS	DESCRIPTION	DRAW	DATE
AO	NEW	PERLIMINARY	Andy	2022.09.22


NOTES:

- Material:
 - 1.1 Housing/Cap: LCP.
 - 1.2 Terminal/Nail: Brass.
- Finish:
 - Terminal/Nail: Plated Tin.
- Specification:
 - 3.1 Current Rating: 1A
 - 3.2 Voltage Rating: 100V
 - 3.3 Insulation Resistance: 100MΩ MIN.
 - 3.4 Dielectric withstanding voltage: 500V AC for one minute.
 - 3.5 Contact resistance: 40mΩ Max.
 - 3.6 Operating Temperature: -25℃~+85℃;




Ordering Information
P A XX 12 125 470 -334-XX S M S
P: Pin Header Series
A: Finished Product
No. of PINS:
Plating Number:
125: Pitch 1.25mm
470: Height 4.70mm
Running number: XX: Colour
01: Indure (本色)
02: Black (黑色)
03: Blue (蓝色)

CKT	DimA	DimB	DimC	DimD
2	1.25	3.25	7.50	7.50
3	2.50	4.50	8.75	8.75
4	3.75	5.75	10.00	10.00
5	5.00	7.00	11.25	11.25
6	6.25	8.25	12.50	12.50
7	7.50	9.50	13.75	13.75
8	8.75	10.75	15.00	15.00
9	10.00	12.00	16.25	16.25
10	11.25	13.25	17.50	17.50
11	12.50	14.50	18.75	18.75
12	13.75	15.75	20.00	20.00
13	15.00	17.00	21.25	21.25
14	16.25	18.25	22.50	22.50
15	17.50	19.50	23.75	23.75
16	18.75	20.75	25.00	25.00
17	20.00	22.00	26.25	26.25
18	21.25	23.25	27.50	27.50
19	22.50	24.50	28.75	28.75
20	23.75	25.75	30.00	30.00

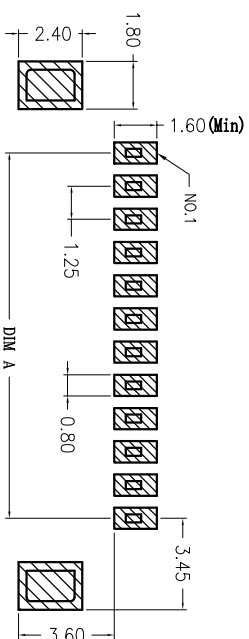

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05

MEASURE POINT:				
QUADRANT POINT		(QP)		
TANGENCY POINT		(TP)		
INTERSECTION POINT		(IP)		
UNLESS OTHERWISE SPECIFIED, TOLERANCE:				
X		±0.25		
X.x		±0.20		
X.xx		±0.15		
ANGULAR		±3		
				
D-CHAIN		DONG GUAN D-CHAIN TECHNOLOGY CO., LTD		
DRAWN		Andy	DATE	2022.06.22
CHECKED			DATE	
APPROVED			DATE	
PART No.		PAXX12125470-33A-XXSMS		
DRAWING No.		TITLE: Pitch1.25 Wafer Row.SMT		
REB: A0		SCALE: 1:1	UNIT: mm	
SIZE: A4		SHEET: 1/1		