

6

5

4

3



2

1



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/28/06	

APPROVED: _____

DATE: _____ TITLE: _____

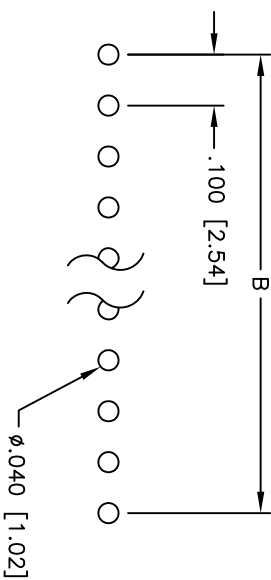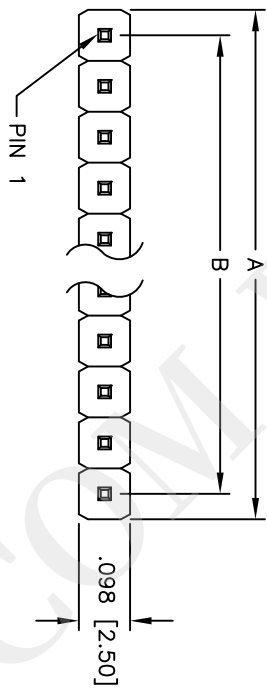

PCB LAYOUT

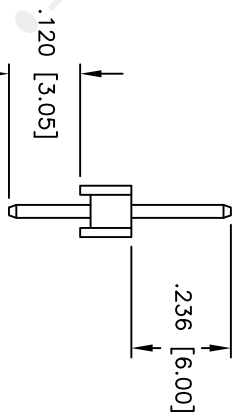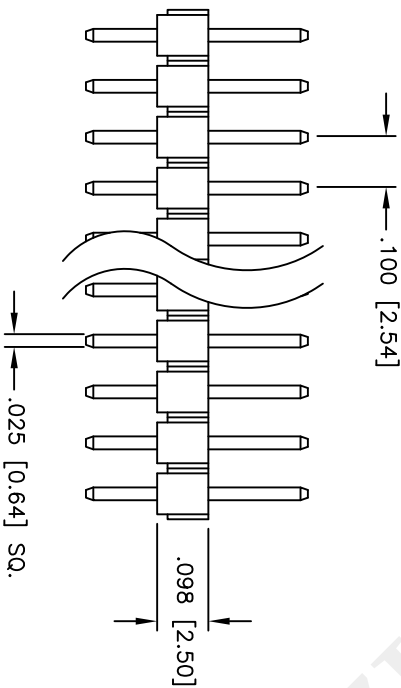

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Environmental:

Lead free, RoHS compliant



Positions: 1 thru 40
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				TITLE 100 [2.54] SINGLE ROW PIN HEADER GOLD PLATED			
INCHES	HOLES	DATE	APPROVALS	SIZE	PART NO.	REV.	
.X ± .10	Ø.X ± .10			X	PH1-XX-UA		
.XX ± .020	Ø.XX ± .015						
.XXX ± .015	Ø.XXX ± .010						
DRAWN	LFI	3/28/06					
CHECKED							
APPROVED							